SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyrighted, 1891, by Munn & Co.]

Vol. LXIV.—No. 17.
ESTABLISHED 1845.

NEW YORK, APRIL 25, 1891.

$3.00 A YEAR.
WEEKLY.

U. S. COAST LINE OF BATTLE SHIPS.

The unnamed battle ships, Nos. 1 and 2, are now in course of construction at the Cramp shipyard in Philadelphia. The contract calls for their completion by Nov. 30, 1893.

These vessels are being built under authority conferred by the act of Congress making appropriation for the naval service, approved June 30, 1890.

PRINCIPAL DIMENSIONS.

Length on load line	348 ft.
Breadth, extreme	69 ft. 3 in.
Draught of water (level keel)	24 ft.
Displacement	10,200 tons.
Maximum speed	16·2 knots.
Sustained sea speed	15·0 knots.

These vessels are to be built of steel; to have a double bottom for the distance of 196 feet, extending the length covered by the machinery and magazine spaces; all the vital portions to be amply protected; and every feature being provided to enable them to cope successfully with vessels of the heaviest armor and armament.

The forward and after turrets for the 13 inch guns mark the extremities of obstructions upon the main deck; from these points forward and aft to the ends of the vessel respectively, no further obstacles present themselves to an uninterrupted fire; means having been taken to remove or turn down any erections which might obviate this end.

Between the turrets for the 13 inch guns there is a superstructure in which are placed the 6 inch guns; and above, or upon the deck erected thereon, are placed the 8 inch guns.

A battery of 6 pounders is arranged along the top of the hammock berthing and bridge, and 1 pounders are placed forward and aft on the berth deck. The double-topped military mast is cone shaped, placed on top of the conning tower just abaft of the forward 13 inch gun turret, two 1 pounders being placed in the lower and two Gatling guns in the upper top respectively.

There are six powerful search lights arranged along the sides, to locate the enemy at night and to guard against small boat attacks under cover of darkness.

(*Continued on page* 262.)

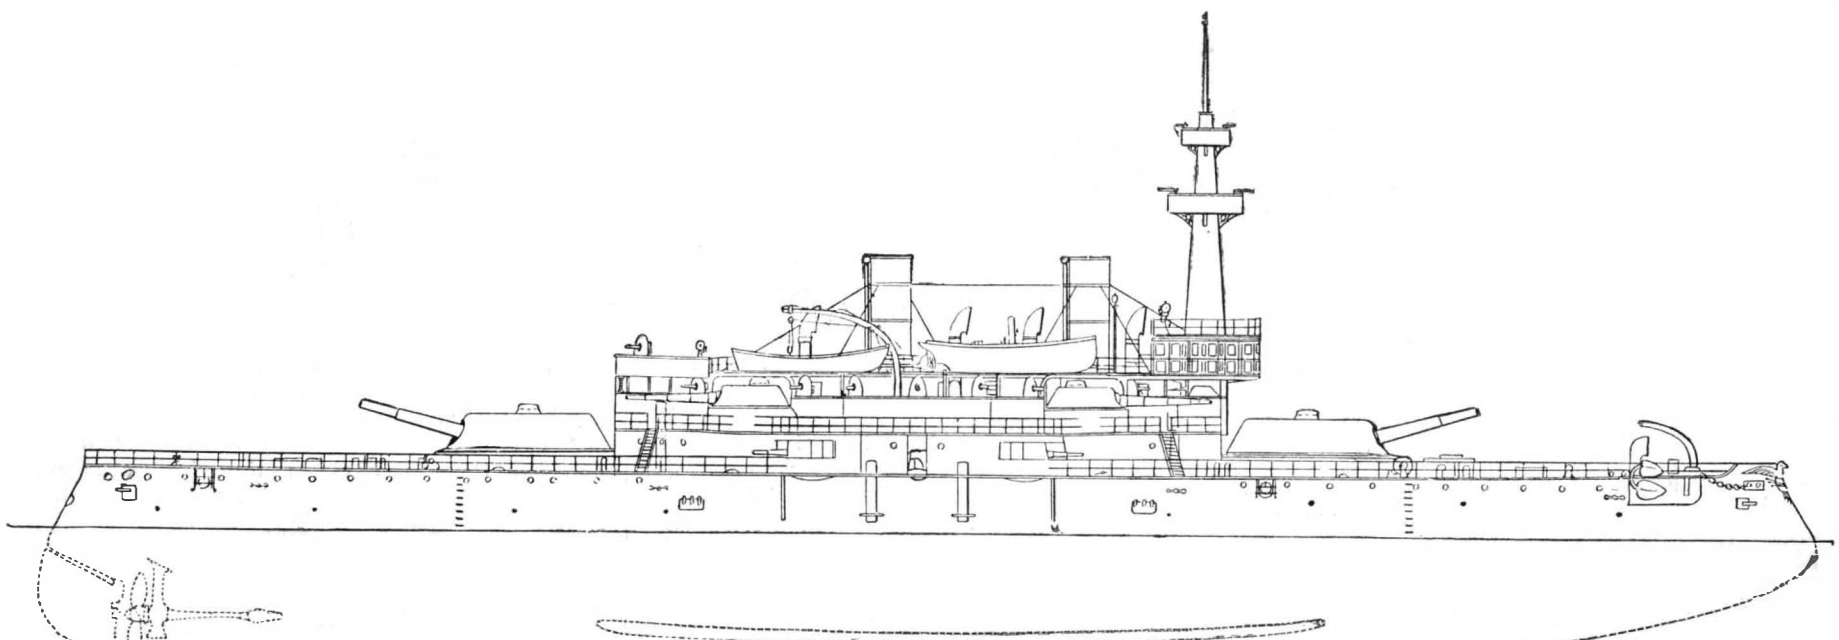

SIDE ELEVATION OF THE SHIP.

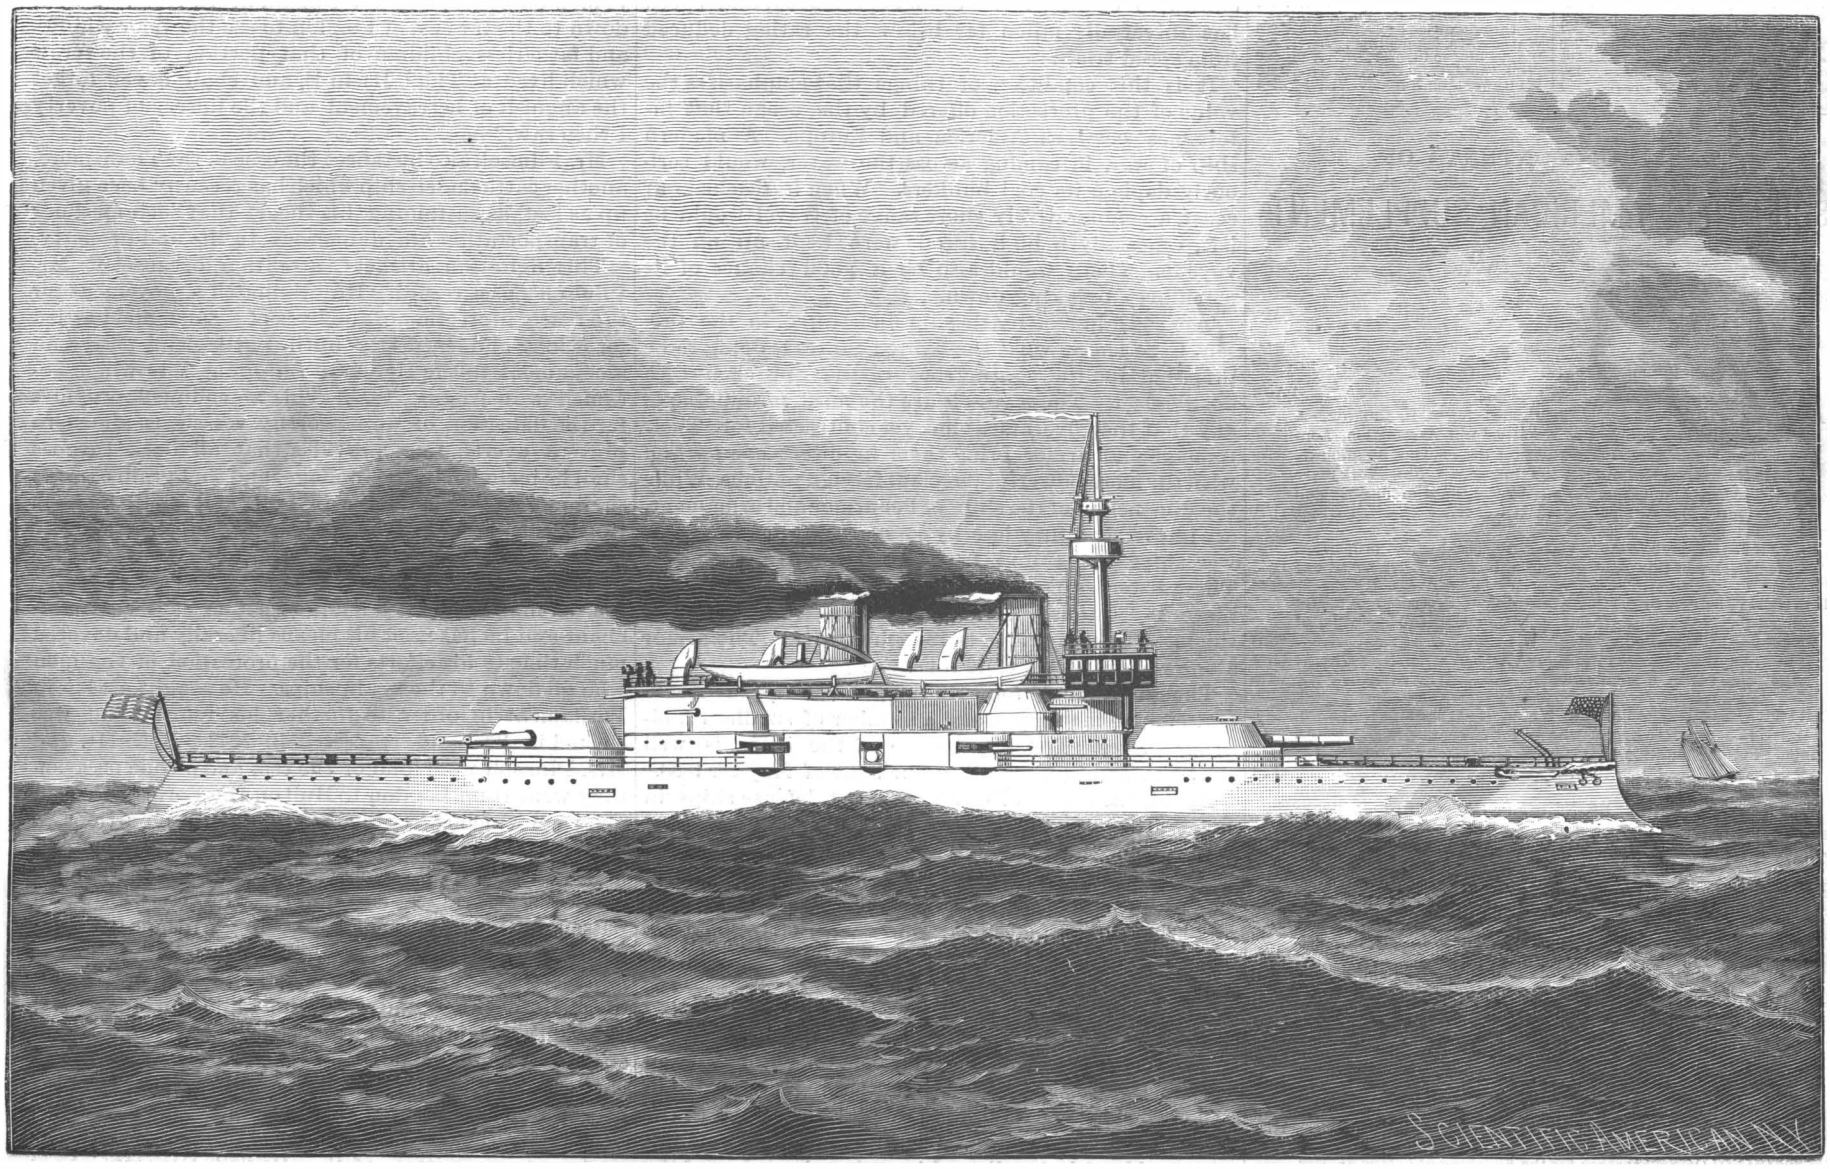

THE NEW LINE OF BATTLE SHIPS FOR THE U. S. NAVY.—THE SHIP AT SEA.

© 1891 SCIENTIFIC AMERICAN, INC.

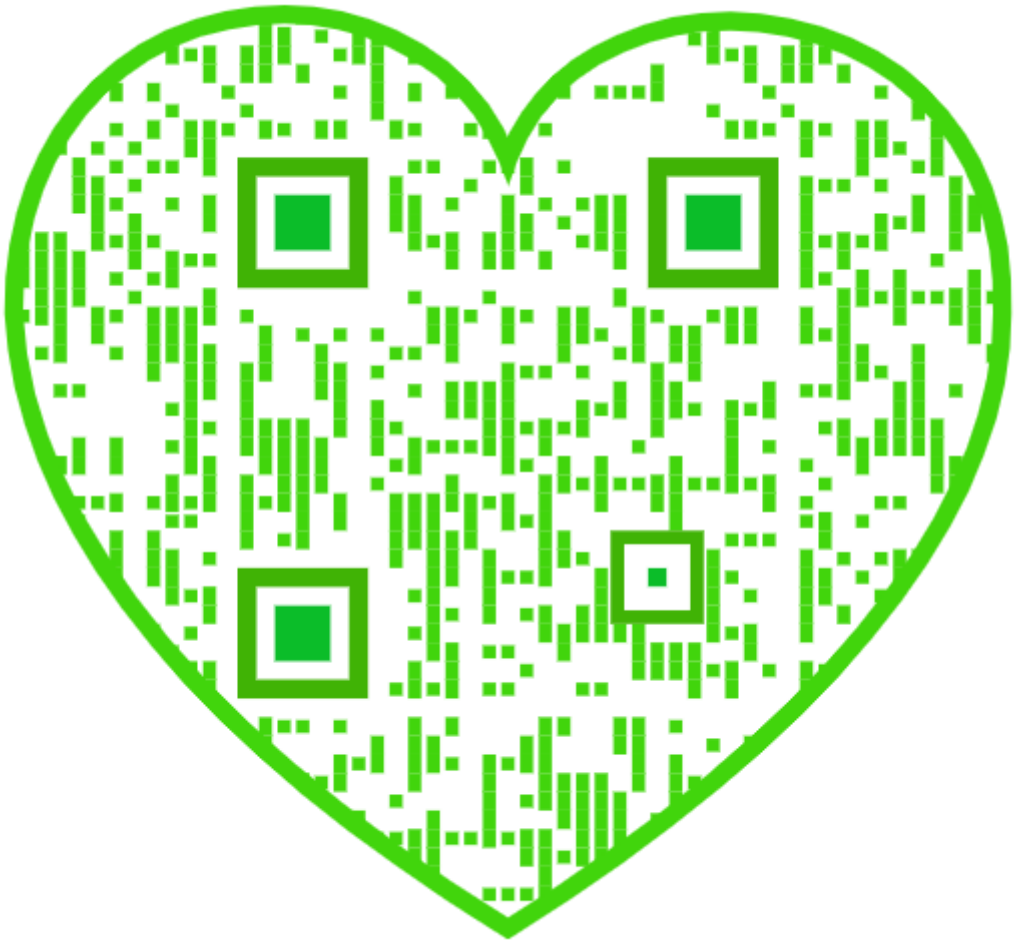

Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT

No. 361 BROADWAY, NEW YORK.

O. D. MUNN. A. E. BEACH.

TERMS FOR THE SCIENTIFIC AMERICAN.

One copy, one year, for the U. S., Canada or Mexico..... .....$3 00
One copy, six months, for the U. S., Canada or Mexico. 1 50
One copy, one year, to any foreign country belonging to Postal Union, 4 00
Remit by postal or express money order, or by bank draft or check.
MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

The Scientific American Supplement

is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains 16 octavo pages, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, $5.00 a year, for U. S., Canada or Mexico. $6.00 a year to foreign countries belonging to the Postal Union. Single copies, 10 cents. Sold by all newsdealers throughout the country. See prospectus last page.

Combined Rates.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year, to any address in U. S., Canada or Mexico, on receipt of *seven dollars*. To foreign countries within Postal Union, *nine dollars a year*.

Building Edition.

THE ARCHITECTS AND BUILDERS EDITION OF THE SCIENTIFIC AMERICAN is a large and splendid illustrated periodical, issued monthly, containing floor plans, perspective views, and sheets of constructive details pertaining to modern architecture. Each number is illustrated with beautiful plates, showing desirable dwellings, public buildings and architectural work in great variety. To builders and all who contemplate building this work is invaluable. Has the largest circulation of any architectural publication in the world.

Single copies 25 cents. By mail, to any part of the United States, Canada or Mexico, $2.50 a year. To foreign Postal Union countries, $3.00 a year. Combined rate for BUILDING EDITION with SCIENTIFIC AMERICAN, $5.00 a year; combined rate for BUILDING EDITION, SCIENTIFIC AMERICAN and SUPPLEMENT, $9.00 a year. To foreign countries, $11.50 a year.

Spanish Edition of the Scientific American.

LA AMERICA CIENTIFICA E INDUSTRIAL (Spanish trade edition of the SCIENTIFIC AMERICAN) is published monthly, uniform in size and typography with the SCIENTIFIC AMERICAN. Every number of *La America* is profusely illustrated. It is the finest scientific, industrial trade paper printed in the Spanish language. It circulates throughout Cuba, the West Indies, Mexico, Central and South America, Spain and Spanish possessions—wherever the Spanish language is spoken. $3.00 a year, post paid to any part of the world. Single copies 25 cents. See prospectus.

MUNN & CO., Publishers,
361 Broadway, New York.

☞ The safest way to remit is by postal order, express money order, draft or bank check. Make all remittances payable to order of MUNN & CO.

☞ Readers are specially requested to notify the publishers in case of any failure, delay, or irregularity in receipt of papers.

NEW YORK, SATURDAY, APRIL 25, 1891.

Contents.

(Illustrated articles are marked with an asterisk.)

Alternating currents of high frequency..... 258
Bacteriology, relation of to nose and throat diseases..... 257
Blackboard, how to make 264
Bleach and caustic soda from salt..... 264
Books and publications..... 266
Business and personal..... 267
Color printing, rotary press for*. 258
Cradina..... 264
Diphtheria..... 266
Epidermis, removing..... 260
Freight cars, platform for*..... 259
Greenhouses, shading..... 261
Hair worm..... 261
Horse race on the stage*..... 263
Illusions, theatrical*..... 259
Inventions, recently patented.... 266
Inventive progress, hindrances to 257
Inventors, faith of..... 260
Koch's lymph, sale of..... 261
Lick Observatory..... 257
Light, where does it go?..... 265
Notes and queries..... 267
Patents and copyrights..... 260
Plimsoll, Samuel..... 256
Press, rotary, for color printing*. 258
Pump or injector..... 265
R.R. ties, metal as a substitute for wood in..... 257
Ships, battle, U. S.*..... 255, 262
Ships' log, electric..... 263
Smoke nuisance..... 265
Steering gear, dangers of bad.... 257
Stockings of human hair..... 258
Toredo..... 266
U. S. coast line of battle ships*.. 255
United States, position of in a defensive war..... 256
Walls, decorating..... 257
Water, composition of..... 260
Water in motion, power of..... 261
Water cresses and onions, sanitary qualities of..... 265
Water ways, deepening*..... 265
Wax, Chinese insect..... 260
Well, tubular*..... 259
Whitewashing Nero..... 261

TABLE OF CONTENTS OF

SCIENTIFIC AMERICAN SUPPLEMENT

No. 799.

For the Week Ending April 25, 1891.

Price 10 cents. For sale by all newsdealers.

PAGE

I. ARCHITECTURE.—Marble and Mosaic.—By T. R. SPENCE.—A paper recently read before the Architectural Association, London, containing valuable suggestions for designers of buildings... 12770
The St. Lawrence Hospital for the Insane.—A New York State hospital recently built from designs by the State architect.—Full description.—1 illustration..... 12771

II. BOTANY.—Lavender and its Varieties.—The history, properties, and technology of this plant.—2 illustrations..... 12773

III. CHEMISTRY.—A Projecting Apparatus of Precision.—A useful adjunct for the chemist's balance, accelerating the operation of weighing.—1 illustration..... 12769
Spectrum of the Sun and Elements..... 12774
Allotropic Forms of Metals..... 12774

IV. HYDRAULICS.—The Power of Water, or Hydraulics Simplified.—By G. D. HISCOX.—Current wheels for power and raising water. Interesting presentation of this practical portion of the subject.—4 illustrations..... 12768

V. MECHANICAL ENGINEERING.—Compressed Air Production.—By WM. L. SAUNDERS.—A Sibley College lecture, giving full elaboration to this important subject.—The various forms of compressors and general features of the service.—18 illustrations..... 12763
Improved Pneumatic Hammer.—A suspension hammer capable of delivering 500 blows per minute.—8 illustrations 12762
The Thermic Motor of the Future?—A remarkable exposition of the possibilities of the gas engine.—Recent experiments under M. Aime Witz.—2 illustrations..... 12761

VI. MEDICINE AND HYGIENE.—The Electrical Purification of Sewage and Contaminated Water.—By WM. WEBSTER..... 12772

VII. NAVAL ENGINEERING.—The New German Dispatch Boat Meteor.—A German built war vessel of great speed.—Her dimensions and rating.— Illustration..... 12759
The Raising of the Ulunda.—A remarkable feat.—The raising of a steamship sunk off Nova Scotia.—10 illustrations..... 12759

VIII. TECHNOLOGY.—Starches for the Finishing of Cotton Fabrics.—Classification of starches, with illustrations of their appearance under the microscope..... 12770

THE UNITED STATES' POSITION IN A DEFENSIVE WAR.

The recent diplomatic correspondence between the United States and Italian governments, in connection with the New Orleans riot, if such term may be applied to that outbreak, has awakened attention to the relative power of the different navies of the world. While there has been no well-founded apprehension that war between this country and Italy was imminent, the suggestion of a possibility of the menacing presence of Italian war ships in these waters has reminded us forcibly of our weakness at sea and on the coasts. To-day the three thousand miles of ocean are our best protection against European powers. They operate now, as they did in the Revolution, to make an energetic defense possible with apparently inadequate means. Fortunately the supposition of war at the present time or in the near future is entirely problematical. The necessity for actual measures of defense is no greater now than at any recent time.

In establishing a navy the United States has begun with the construction of unarmored cruisers, protected partly by deflecting steel decks and coal bunkers. Great success has been attained with these, and their speed and general reliability have been adequately proved. No country has surpassed them. The next step is in the direction of armored fighting ships.

The United States high-speed protected cruiser No. 12, now building, is the representative of the connecting link between the ships of the so-called White Squadron and the armored line-of-battle ships alluded to. It is to be 400 feet long, with 21 knots sustained speed and 20,000 sustained horse power. It can carry 2,000 tons of coal, disposed in part in lateral bunkers so as to protect the vital portions of the ship as far as possible. This amount of coal will keep the ship at sea for 109 days, steaming at a speed of 10 knots. Such a ship is a commerce destroyer, and would do immense damage to an enemy's shipping in a single cruise. Three line-of-battle ships, with heavy armor, are also in process of construction by the United States.

The efficiency and value in war of the heavily armored fighting ship of to-day is practically unknown. In the great navies each vessel has its rating. The armament, armor, and speed are the controlling factors to determine her position, offensive and defensive. But to obtain a more practical idea of relative capabilities, trial maneuvers have been instituted by different governments. While one object of these trials has been to try the defensive powers of coast batteries and harbor defense ships, the sea-going qualities of the squadrons have been subjected to the most exacting tests—to tests assimilated to the conditions of actual war.

The result of these operations has been to show that the war ship of the navies of the day, whose value in action is unproved, as a sea-going vessel is seriously wanting. In the English autumn maneuvers, ship after ship has broken down, boilers have leaked, difficulties in coaling have been experienced, and speed has universally fallen far below the rating deduced from speed trials.

It is this condition of things that emphasizes the value of the protection offered by the ocean that intervenes between America and Europe. A modern ship of war, in coming across the water, would seriously deplete its coal bunkers. When it reached our coast, a comparatively short range of travel would be left, especially if high speed were kept up on the voyage. There would also be a good chance of its machinery breaking down.

The coast line of battle ship illustrated in the present issue shows what the United States is doing to be prepared for the contingency of the approach of a hostile fleet. These vessels are the most formidable of any that the government has yet contracted for. Their tonnage and armor bring them in direct comparison with the more powerful vessels of foreign nations. While the dimensions of the ship, of her armor and armament, are impressive, they lose by comparison with the great war ships Italia and Lepanto of the Italian navy. These sister ships are 400 feet 6 inches long, and displace 13,480 tons. The armor in places is 21 inches thick. The side armor is 18 inches thick. The armor alone weighs nearly 3,000 tons.

The guns include four 110 ton guns of 17½ inch caliber, eight 6 inch guns, and a number of smaller rapid-firing pieces. The appearance of the ships is well shown in a cut published in our issue of May 26, 1888.

Again, the status of our new coast defense ships in the matter of armor is indicated by the fact that armor 18 inches and more in thickness is carried by 19 English, 13 French, 10 Italian and 7 Russian ships. The Duilio and Dandolo of the Italian navy, each of 10,960 tons displacement, and each including in its armament four 17¾ inch rifles, are good representatives of foreign practice. It is with such ships as these that our new vessels might be called upon to cope.

But figures alone are deceptive. Immense advances in naval engineering have been made here and abroad during the last few years. Eighteen inch armor of nickel steel is far superior to the plates supplied to the ships now in commission. Two to four inches advantage could safely be allowed in rating the armor of the new ships. The speed will undoubtedly be far better, comparatively, than in the older ships, although it may be rated as less. Thus the Italia succeeded in attaining 17·8 knots on her speed trial. But if put in commission, it would not be surprising if a falling off of several knots were to ensue; at least this is the lesson of every practical trial of the great navies during a number of years.

Again, modern ammunition is far in advance of the work of even five years ago. The value of the largest Armstrong guns, such as are used on the Italian ships cited, is utterly problematical. The tendency now is to abandon the larger calibers and endeavor to secure sufficiently good results with smaller pieces. In the shock of action, heated by the combustion of their charges, with every vent rapidly scored by escaping portions of the charge, the large built-up guns rapidly deteriorate. It is more than probable that the modern 13 inch guns of the American ships would excel in fighting power the heavier pieces of the Italian ships.

The shallowness of our harbors and the narrowness of the entrances thereto protect our cities and coast to some extent. The Italia and Lepanto draw 30 feet, and could not well get past Sandy Hook at the entrance of New York Harbor, many miles from the city. Theoretically they might lie offshore and send shells into New York, but whether they could do so with any practical results is doubtful. A large number of shots would be required to do extensive damage, and it is uncertain how many discharges a 17½ inch gun may stand before disablement. It would not do to send a ship across to fire in a bombardment a comparatively small number of shots before being reduced to the smaller pieces and machine guns for protection, its career as an offensive element thus terminating.

SAMUEL PLIMSOLL.

Samuel Plimsoll, who is known in England as "the sailors' friend," recently arrived in this country. He is prosecuting an inquiry into the business of transporting live cattle across the ocean. In a letter dated in New York and recently published in the London *Times*, Mr. Plimsoll claims that a certain class of ship owners are so indifferent to the lives of the men that they load their vessels with three tiers of cattle. First the "'tween" deck is loaded from end to end and from one side to the other as close as the animals can stand. The main deck is similarly loaded with cattle which cannot lie down, so close are they, and lastly the upper deck is also loaded in the same way.

Mr. Plimsoll claims that a vessel thus loaded becomes "crank," rolls badly and is apt to become unmanageable. "I feared," he said, "such shocking recklessness would be discredited, and so besides inquiring of many people, obtained written testimony." He closes his letter to the *Times* as follows: "It is not quite a year since the Erin sailed, cattle-laden, from this port with 74 men on board, and never again heard from. I went down to the far east of London to see the poor widows and fatherless children of that portion of the crew which lived at Tidal Basin E, and shall never forget the anguish of bereavement and the misery of poverty I then saw."

Mr. Plimsoll also instances the case of the Thanemore, another cattle-laden ship which has recently been given up as lost, as sustaining his theory that such methods of transportation are dangerous to life and property.

This agitation attracts attention because of Mr. Plimsoll's past record. He originated a movement for the better protection of the lives of seamen and battled for it long and earnestly until Parliament passed an amendment to the Merchant Shipping Acts which became law in August, 1876. This amendment provides for the detection of unseaworthy vessels, is aimed to prevent overloading, provides that all deck cargoes shall be included in the tonnage, and that grain cargoes shall not be carried loose in bulk, but shall be kept from shifting, either by boards or bulkheads or by being carried in sacks. The latter object was further secured by the Act of 1880.

Mr. Plimsoll amassed a large fortune as a coal merchant and he has used his means liberally and devoted much time to his efforts for the protection of the men who go down to the sea in ships. He sought a seat in Parliament in order to further his reform, and was elected in 1868 and re-elected in 1872. Both Mr. and Mrs. Plimsoll were fond of the sea, and on one occasion they went from London to Hull on the Yorkshire coast, a voyage which skirts the most dangerous portions of the British shores. The steamer upon which they took passage seems to have been greatly overloaded, and a very severe storm was encountered, the vessel, crew and passengers being in great peril. In gratitude for their escape Mr. and Mrs. Plimsoll resolved to undertake the agitation which resulted in one of the greatest reforms of modern times, and which he still continues. Mr. Plimsoll's new crusade meets with very vigorous opposition. His opponents claim that the carrying of live cattle is not more dangerous than the carrying of other cargo, notably cotton. The business, however, has been made the subject of special inquiry by the department committee of the British Department of Agriculture, while Mr. Plimsoll is making exhaustive

© 1891 SCIENTIFIC AMERICAN, INC.

investigations on his own account. He went from New York to Montreal, and has since been reported at several points in the West gathering information about the cattle trade in the same indefatigable manner which characterized his efforts when he was laboring to secure the great reforms which have made him famous. He is now 67 years of age.

METAL AS A SUBSTITUTE FOR WOOD IN RAILROAD TIES.

The report of the Forestry Division of the United States Department of Agriculture on the consumption of wood for railroad ties seems to establish the fact that this consumption is a leading factor in the depletion of our forests. Besides many interesting statements regarding the destruction of young trees, the report also contains the results of an exhaustive inquiry as to the use of metal by railroad managers in this and many foreign lands, and this method of construction is suggested as one remedy for the denudation of our forests, which is generally acknowledged to be going on at the present time.

This portion of the report was prepared by E. E. Russell Tratman, C.E. The statistics are given of 25,000 miles of railroad laid with metal track out of a total mileage of the world (exclusive of the United States and Canada) of 187,721 miles, or a relation of 13·12 per cent to this total mileage.

In foreign countries the use of metal for wood on railroads has passed beyond the experimental stage. Practical tests are now being made in this country, and interest in the subject among railroad men is increasing.

A section of track on the New York Central and Hudson River road, about a quarter of a mile in length, was laid with the modified "Hartford" tie. Mr. Walter Katte, the engineer of the road, reports as follows regarding this experiment:

"The ties (metal) were laid in November, 1889. The line has the heaviest kind of freight and passenger traffic.

"Passenger engines, with a weight of 36 tons, on four driving wheels and a driving wheel base of 6 feet, pass over these ties at speeds of 40 to 55 miles per hour. The ties have not been in use long enough for the expense of maintenance to be determined. Apparently it is thus far no greater than with wooden ties. The reason for using these ties was the desire to secure economy over wooden ties, and to obtain a superior attachment of the rails to the ties. The result has so far been quite satisfactory. I am of opinion that the rolled metal tie is essentially a requisite for first class permanent way in this country. Having investigated the relative economy of metal and wooden tie systems for a term of fifty years, I am led to believe, as the result thereof, that upon the basis of 55 cents for a wooden tie and $3 for a steel tie, and under the conditions of traffic and maintenance expense existing on this line, the relative economy is from 8 to 12 per cent in favor of the metal system."

The general adoption of metal in place of wood for railroad ties would check the enormous consumption of the young growth of our forests. On this point Mr. Fernow, of the Forestry Division, makes this forcible statement: "The use of wood, and the method of using it, are largely matters of custom everywhere. In the United States the enormous supplies which the native forests yielded have not only induced a very extensive, but also a very wasteful use of wood, until now we have reached a point when the prospect of reduced supplies makes the study of economics a matter of national concern, and within a not too distant time private interest will also awaken to the need of it."

To inventors, a wide field of study and usefulness is open, in devising good and economical applications of metal for ties and rail connections.

The Lick Observatory.

The Lick observatory, with its large number of instruments and its famous telescope, is now one of the best equipped observatories in the world. The great telescope has proved to be all that was expected, and has repeatedly proved its unsurpassed power. A recent circular issued by the director, Prof. E. S. Holden, discloses the work in hand there, the great opportunities for future investigation, and unfortunately makes clear its absolute need of funds. It has only five observers, a small number when compared with twenty in the Greenwich, England, observatory, seventeen in Harvard College observatory, nineteen in the Washington observatory, and so on. The great glass, the triumph of Alvan Clark's life, needs better support than this. The demands specifically made are very modest; a computer and an assistant photographic astronomer are all that are asked for. An endowment of $60,000 would secure these and provide for the increase of their rather limited salaries in the future.

We can but hope that Prof. Holden will find his demand attended to, and that success will attend his efforts for the Lick observatory.

Audubon.

Under the auspices of the New York Academy of Sciences a movement has been inaugurated to erect a monument to the memory of the great naturalist whose name heads this article. An Audubon monument committee has been appointed by the Academy, a design has been prepared for the monument, and it is now the desire of that body to raise a sufficient sum of money to erect it. It is estimated that $10,000 will be required. Such sum is but a small tribute to the services of the incomparable Audubon, the prince *par excellence* of field naturalists, and one who combined with his scientific attainments the attributes of the refined sportsman. He studied bird-life in the field. He was not content to work within the closet, and to be a mere classifier of specimens. The scope of his researches included all the habits of birds, their food and even their characteristic positions. His unsurpassed illustrations were the result of study from life, not from specimens, and inaugurated a system of study of natural history that hitherto has had too few followers. Its laboriousness and the patience it exacts from its votaries have probably deterred many from its ranks.

To-day the remains of Audubon rest in Trinity cemetery, within a short distance of his home and of the park named after him. In 1851 the interment took place, and as yet there is no monument there. The neglect thus manifested should be soon disposed of. It is hoped that the monument may be erected this fall. The treasurer of the committee is Dr. Thomas Egglesston, of Columbia College, N. Y., who will gladly receive contributions from all interested.

Hindrances to Inventive Progress.

What are the chief discouragements to inventive progress? One of these is the hindrance imposed by the existence of inferior methods for accomplishing works of the same class to which improved means would apply. To this is allied the suppression of valuable patented devices in the interest of monopolies, their suppression in the interest of labor, and the competition among inventions themselves. Great as the influence of the patent system has been and is, in the encouragement of invention, it has nevertheless been very considerably abused in enabling the purchase and suppression of valuable inventions by parties interested in maintaining methods that the new means would otherwise supplant. Persons controlling corporations, or exerting, either directly or through connections, a powerful influence therein, are often enabled to secure a preference for one device over something that may be far superior. Great corporations enjoying monopolies of their business are likely to be indifferent to the improvement of their service in the interest of their patrons and the employment of better means for the convenience of the latter, unless they have been thoroughly taught that it is for their interest to do so. The telegraph and telephone monopolies in this country are instances of this; the former resting upon the assimilating capacity of a large accumulation of capital in one enterprise, and the latter upon the proprietorship of a basic invention. The practical adoption of any improvement in the telegraph or telephone would not at present be possible without the consent of these companies. The supplanting of one form of machinery by an improved form, and the injury or destruction of enterprises with their capital invested in the old, is one of the greatest elements of cost or waste in modern production, and manufacturers are obliged often to figure very closely to see whether it would profit them to adopt some improved method.

It frequently happens that no sooner has a new way of doing something been perfected and set in operation than some one else comes forward with still another means of reaching the same result, and either by his competition prevents the other from reaping fully the anticipated harvest of his skill, or supersedes the former method entirely and ruins the enterprise. The opposition of labor to the introduction of new inventions is very old. From the early days of the power loom and the railway down to the present time the story has been the same—on the part of the workers the most strenuous opposition to the employment of labor-saving devices, for fear of being thrown out of work. Experience has shown us that, on the whole, there has been no loss of occupation for the working classes from this cause, since the increased production attendant upon the use of labor-saving machinery and the creation of new industries causes a demand for labor under the new conditions at least equal to that existing before. Yet nearly every mechanical device that does the work formerly performed by several persons can hardly fail to effect great injury to many individuals, and even to large classes of workingmen, by reducing them from the ranks of skilled to unskilled laborers, and disturbing the equilibrium of industry.

The progress of invention would be, doubtless, very much more rapid were it not for this opposition on the part of labor, and production would be correspondingly cheapened. Organized labor has of late years exerted a powerful influence against the substitution of mechanical processes for the more slow and costly hand work. That strong organization in the boot and shoe industry, for instance, the lasters' union, forbids the employment of machinery to do any part of the work within its province, and, in consequence, some very costly devices in shoe shops have been compelled to stand idle. Owing to the objection of the Knights of Labor, the use of power presses in the engraving department of the National Bureau of Engraving and Printing at Washington is not allowed, although the cost of production is enormously increased to the government by the employment of hand presses. Labor cannot be blamed for this opposition in its own behalf, any more than capital can be blamed for combating any measures that tend to limit its liberty of action.—*Sylvester Baxter, in the Cosmopolitan for April.*

The Relation of Bacteriology to Nose and Throat Diseases.

At a recent meeting of the British Laryngological and Rhinological Society, Dr. John Macintyre, of Glasgow, gave an interesting lecture, introductory to the discussion on the relation of bacteriology to the diseases of the throat and nose. In the course of his lecture Dr. Macintyre discussed the general facts concerning bacteriology, such as classification, vital phenomena, etc., and stated the arguments for and against the vitalistic theory of disease. He demonstrated a large number of specimens of well known forms of micro-organisms under the microscope, as well as numerous micro-photographs on the screen, and made special reference to those of interest in throat and nose work. He showed several found in the mouth and nose of healthy people, which are apparently harmless, and others found in diseases where there is decomposing material such as in ozæna. He referred to the specific forms found in diseases of the lower part of the respiratory tract, as tubercle, lupus, diphtheria, pneumonia, and suppurative diseases. Lastly, he discussed the question how protection was to be got from the diseases associated with micro-organisms, noting the result of inoculation, and criticised the theory of phagocytosis. He explained some interesting experiments now being made in Glasgow with reference to the hypodermic injection of chemically pure carbolic acid, which bid fair to demonstrate the possibility of rendering the effects of certain pathogenetic micro-organisms inoperative within the body. In considering the possibility of rendering the tissues unsuitable for the growth of organisms after their entrance into the system, he cautioned his audience not to be carried away too hastily by Koch's or Liebreich's methods of treatment for tuberculosis.

[The above, is from *The Lancet*, London, considered good medical authority. The remedy proposed for ordinary throat and nose diseases may be worthy the consideration of physicians who have cases of la grippe under their charge. It is a fact that the latter disease is very prevalent in a great many of our populous places, and that it seriously affects the nose, throat and respiratory organs, and it is not improbable that the cause may be produced by some form of bacteria which the remedy proposed may relieve. But persons should beware of the use of carbolic acid in the manner suggested, except under the direction of a skillful physician.—ED.]

Dangers of Bad Steering Gear.

A decision given out recently by Judge Swan, of the United States district court in Detroit, contains a warning to vessel masters to look after their steering gear. On April 28 of last year, the steamship Cayuga, entering the St. Clair River, met the propeller Wilson towing the schooner Manitowoc. The steamers passed all right, port to port, but the Cayuga had hardly passed the Wilson when she suddenly sheered, until she caught the tow line of the Manitowoc on her stern. She then scraped down the line until she struck and sunk the Manitowoc. The Cayuga's defense was that the accident was unavoidable. It was claimed that the chain of the Cayuga's steam steering apparatus became suddenly and inexplicably out of order, and that as soon as this was discovered she was reversed at full speed. Upon these proofs Judge Swan decided that the Cayuga was entirely to blame. The Manitowoc showed that the chain of the Cayuga was very improperly adjusted to the quadrant. The latter is a fan-shaped device attached to the rudder shaft, provided with grooves for the chain to run in. It was shown that when the helm of the Cayuga was put hard over one way or the other, the free chain would become so slack as to slip out of the groove in the quadrant and became useless when called upon again in putting the helm the other way, unless replaced in the groove. This Judge Swan held to be very clear negligence.

DECORATING WALLS.—A rich and brilliant effect, according to *Furniture and Decoration*, is obtained in walls intended to be decorated by mixing an equal quantity of marble dust with the lime used in making the plaster. This gives a softness of tint which cannot be obtained with ordinary plaster. In Italy it has long been the custom to give a final coating of marble dust to walls intended to be treated by the wet process.

© 1891 SCIENTIFIC AMERICAN, INC.

ROTARY PRESS FOR PRINTING IN COLORS.

A few months ago, when describing Mr. Domery's rotary press for printing several colors simultaneously, we expressed the hope that this would soon be rendered complete, we scarcely suspected that before the end of the year we should see this phenomenon (we might almost say prodigy) of a rotary machine striking off more than a million copies of a journal illustrated with the most diverse superpositions and mixtures of colors, and that, too, without the least admixture and under extraordinary operating conditions. This improvement marks a new page in the history of rotary presses, which we shall sketch in a few lines.

We shall merely speak by way of parenthesis of the first experiments made by Nicholson and Hoe and afterward by Kinsley. The presses devised by these inventors were comparatively crude. The first machine that gave really good results was brought out at Paris in 1867. This was constructed by Mr. Worms, of Argenteuil. At the same epoch, Mr, Derriey sent to the Paris Universal Exposition a machine that attracted much attention by the simplicity and perfect working of its mechanism. Again, another manufacturer, Mr. Marinoni, in January, 1868, installed in the offices of the *Petit Journal* (which at this period was beginning to obtain a large circulation) four rotary presses which were capable, all together, of printing 36,000 copies per hour—a feat that was considered phenomenal at this epoch. From that period, improvements have rapidly succeeded each other, and the presses now employed for the printing of daily papers easily strike off 30,000 copies per hour. Our engraving (Fig. 1) represents a rotary press in operation.

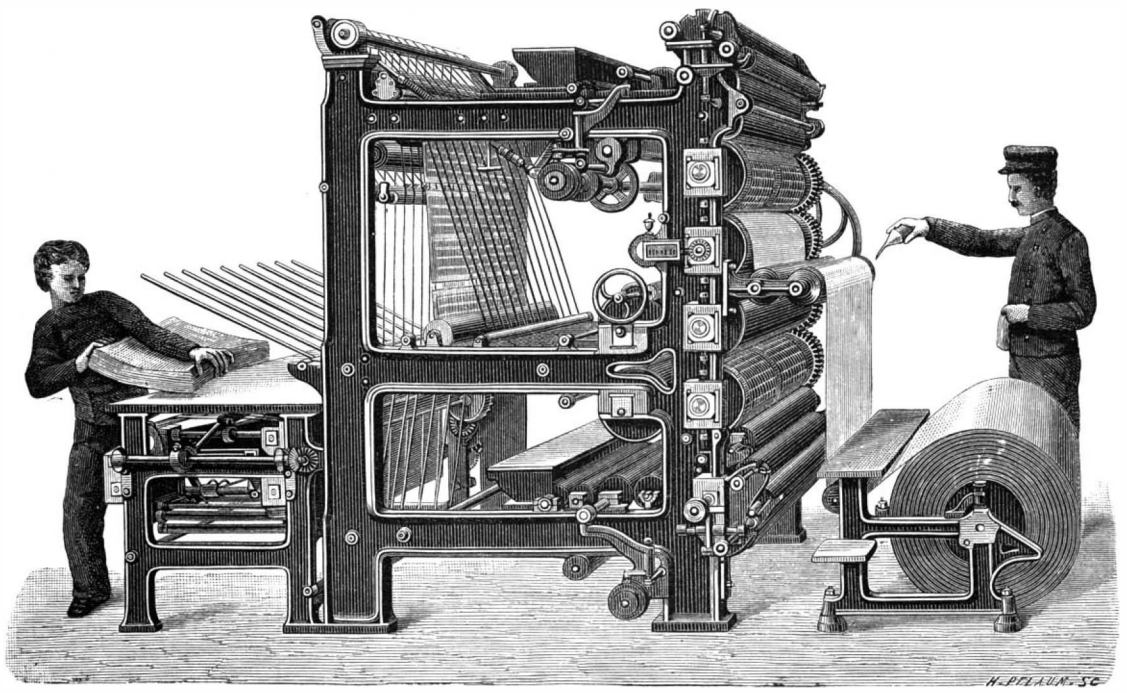

Fig. 1.—ROTARY PRESS FOR PRINTING IN COLORS.

In order that the new machine may be well understood, we give a diagram (Fig. 2) that permits of following the movement of the paper upon the different cylinders, from the starting point of the white paper roller (figured to the right) up to the reception of the printed journal, cut and folded, upon the table to the left. The paper coming from the roller passes under the cylinder, *a*, called the blanket, which presses it against the stereotype plate cylinder, A, which is inked by means of the small rollers shown in the engraving, and prints the recto of the sheet. Thence the paper passes over a second blanket, *b*, which presses it successively against the cylinders, B and C, and gives an impression of the plate upon the verso, and then over the blanket, *c*, and the cylinders, D and E, which continue and finish the impression upon the verso. Then the paper passes between the cutting cylinders, *m* and *n*, whose function is explained in the name. The forward end of the cut sheet is driven toward the folding cylinders, which give it successively two folds and allow it to fall afterward upon the receiving table.

Between the blankets, *b* and *c*, the paper traverses a wide space without being supported. In order to prevent it from undulating, there is arranged in the vicinity of the blanket, *c*, a roller, *r*, that carries balls, *s*, which press against the margins of the impression. As the velocity at the circumference of this roller is so regulated as to slightly exceed that of the printing cylinders, and consequently that of the paper, it results that the latter, far from undulating, will always be somewhat taut, thus securing an exact registering.

From what precedes, it will be seen that the sheet has been printed on the recto by the cylinder, A, and then on the verso by the cylinders, B, C, D, and E, each of which may have been capable of printing a different color, since each is provided with a special inking apparatus.

That is the arrangement adopted, for example, for printing the illustrated supplement of the *Petit Journal*. The recto is entirely reserved for the text, and the verso for the colors. But it is evident that it would be possible to modify this arrangement, and to print in colors on the recto also. It would suffice, in the place of the cylinder, A, to install an apparatus of the nature of the verso cylinders. The press may be arranged for printing two copies broadwise. These copies will then be separated by the cutting disk, which is figured at the top of the last cylinder to the left. It is possible, too, with this press, to obtain a 16 page copy formed of two parts of 8 pages, superposed and folded together with two folds. To this effect, there is arranged above the roller, *r*, a cutting disk, which separates the 8 page parts, one of which descends between the small roller and the balls shown under the cylinders, E and C, while the other entirely covers the cylinder, C, and afterward passes over an arrangement of rods upon which we shall not dwell for fear of complicating our description. On leaving these rods, the band passes successively over two small rollers and finally reaches the cutting cylinders, where it is superposed exactly over the other band. Both descend between the folders after being cut at the same instant. They first receive their first fold, and then their second, and reach the table in the form of a 16 page copy. Still other combinations may be made according to the number of pages that the circumference of the cylinder accommodates. We shall pass them by in silence for fear of tiring our readers. We shall merely allude, in conclusion, to the arrangement that permits of successively printing two colors that are capable of being superposed, with a single stereotype cylinder and a single blanket cylinder. To this effect, there are employed rollers of a width corresponding to a copy—the width of the cylinders being doubled. The band of paper, after being printed, in passing between the cylinders, *a* and A, on their first half, passes over a system of rods (shown to the right of the figure) like the one already mentioned. Thence it returns in passing over two small rollers and engages with the other half of the cylinders, where it receives a second impression upon the same side. It suffices, therefore, in order to obtain two different colors, to divide the inking roller corresponding to the cylinder, A, into two parts.

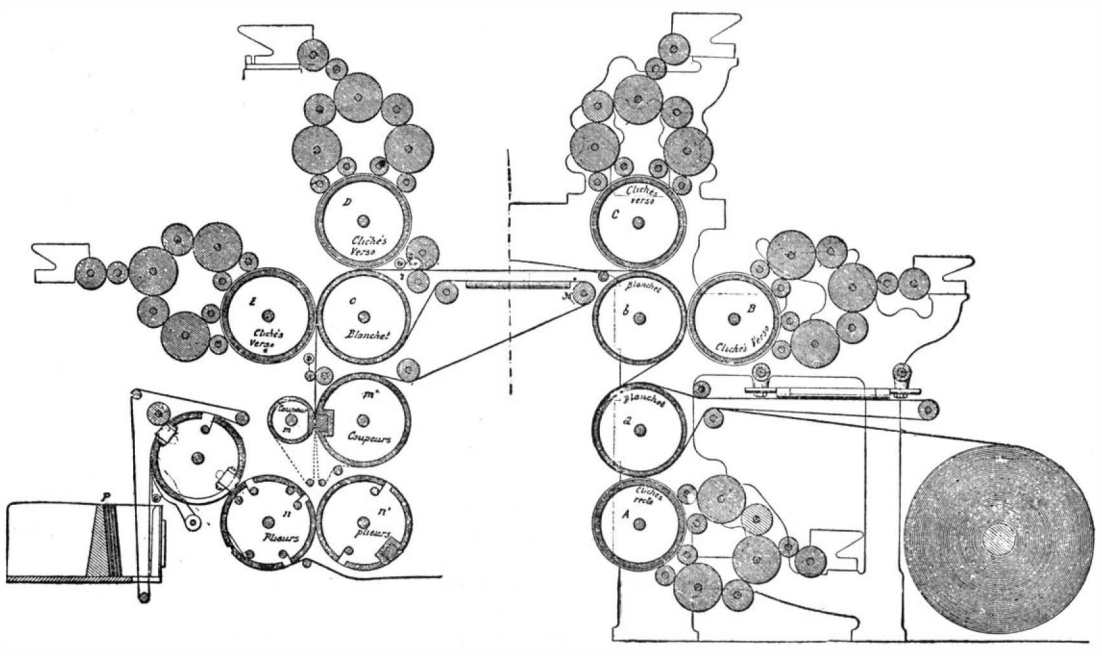

Fig. 2.—DIAGRAM OF THE MECHANISM.

The great difficulty of this system of printing in colors has always been the question of impasting and the quick drying of the colors. The first part of the problem has been solved in the press just described by a special arrangement of the printing plates. Without entering into long details upon a patent which is as yet not made public, we can say that this arrangement consists in striating the plates. The drying of the colors is a more difficult question, at least as regards bright tints. But at the point that has been reached, it may be foreseen that all difficulties will soon be overcome. However this may be, the press, as now being constructed, is capable of rapidly printing a journal illustrated in colors, and a progress is here made that is a new success for rotary presses, and that solves one of the most interesting problems in printing—that of the cheap striking off of illustrated journals.

—*Les Inventions Nouvelles.*

Photo. Transfer.

Place the chromate paper containing the photo. for ten minutes between two sheets of paper which have been saturated in a 1-5 solution of nitric acid in water. Upon the zinc plate place a piece of paper which had been previously soaked in nitric acid, and pull through the hand press, which will cause a slight etching of the surface of the zinc plate. The sheet of paper is taken off and all traces of nitrate of zinc are carefully removed from the zinc plate by means of a blotter.

The photo. is then transferred upon the plate, gummed over, etc. It is then rubbed in with ink, which has to be thinned with olive oil, and when all details appear sufficiently strong, the plate is etched with a preparation made by adding a small quantity of phosphoric acid to a gum solution. When a drop of such a preparation placed upon a polished zinc plate discolors the same and affects its purity, then it is of sufficient strength.

—*Lithographic Art Journal.*

Alternating Currents of High Frequency.

It has more than once been suggested that if we could but construct an alternating machine capable of giving us a frequency of alternations approximating to that of light, we should be able to obtain luminous effects without the accompaniment of heat, and thus obtain an ideal method of illumination. Unfortunately, the limits of the strength of materials, and of the mechanical and electrical means at our disposal, have thus far made the realization of this suggestion impossible. Recent experiments have shown, however, that even with a frequency of alternation far below that assigned to the light-producing waves, important luminous phenomena are observed, and in a recent article Mr. Nikola Tesla gives the results of some remarkable experiments effected with an alternating current of 20,000 reversals per second. In these the condenser action of lamps and conductors is very forcibly brought out, and points to the fact that the condenser will play an important part in the methods of distribution of light in the future, if not, indeed, of power. Referring to the same subject, Prof. Elihu Thomson gives results of experiments made in the same direction, which cannot fail to draw attention again to this subject, and which, taken in connection with the recent inaugural address of Prof. Crookes, illustrate forcibly the tendency of modern work in the attempt to obtain light without heat. Prof. Thomson also contributes a valuable note on the physiological effects of alternate currents of high efficiency, in which it is shown that at very high rates the current is less dangerous than at the lower rates now in vogue.—*Electrical Engineer.*

Stockings of Human Hair.

The Anthropological Department of the Smithsonian Institution has received from Dr. Macgowan a pair of stockings manufactured from human hair. They are worn by fishermen over cotton stockings (being too rough for the naked skin) and under straw shoes as protection against moisture. Hair unsuitable for textile purposes is collected from barbers' shops and sent to a part of the province for manuring rice fields, which, it would seem, are deficient in silica.

© 1891 SCIENTIFIC AMERICAN, INC.

NEW TUBULAR WELL.

Where driven wells are feasible, they have become very popular, because surface drainage into the well is avoided and the entrance of foreign matters into the water chamber is prevented by a thick stratum of earth, but driven wells are objectionable in some places

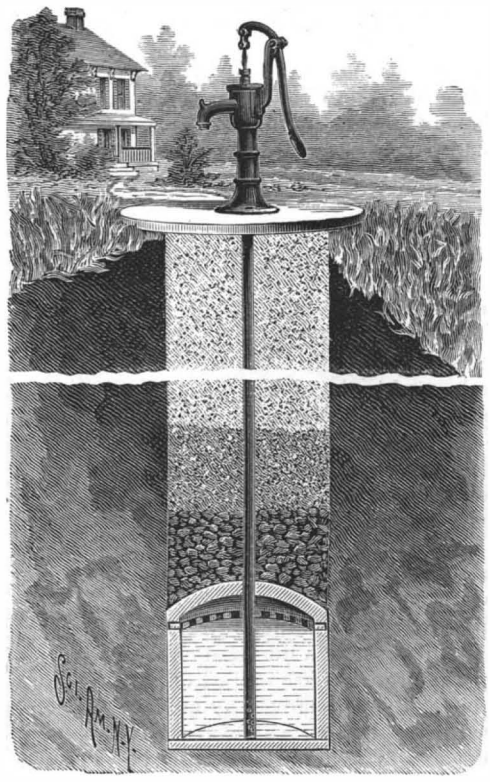

RICE'S TUBULAR WELL.

on account of the liability of the strainers, the valves, and even the pipe to stoppage by gravel and sand.

To avoid these difficulties Mr. John Owen Rice, of Hutchinson, Minn., has invented and patented a device by which the advantages of the driven well may be secured, while its disadvantages are claimed to be avoided. As will be seen by reference to the engraving, the improved well, which is of considerable diameter, is dug down to the water-bearing stratum, and at this point is built a reservoir of brick, cement or wood, provided with perforations for the entrance of water, and arched over the top. At some point in the arched top of the reservoir, preferably at the center, is inserted a tube which extends from the bottom of the reservoir to the pump above. The lower end of the pipe is perforated to allow water to enter, and the space above the arched top of the reservoir is filled with stone, gravel, and earth, preferably arranged in the following order, stone being placed upon the arch, gravel upon the stone, and earth above the gravel.

With the well constructed in this manner, the water in the reservoir is perfectly protected against contamination from surface drainage or from the entrance of foreign substances, and at the same time gravel, sand, and earth are prevented from entering the pump chamber.

THEATRICAL ILLUSIONS.

An explanation of the illusions employed in theaters is always welcome, and the spectators take more interest in seeing a mystery performed whose hidden working is familiar to them than do those who do not possess the key of the enigma.

We are going to describe two tricks which, though now old, have had much success. The first of these, called the palanquin or stretcher, was employed in an old fairy scene whose name escapes us. It was almost as much of an illusion as is obtained in prestidigitation, and the rapidity with which it was performed did not allow the secret of it to be perceived.

One of the heroines of the play was presented on the stage in a palanquin carried by four slaves (Fig. 1). At a given moment the curtains were drawn and then immediately opened, when it was seen that the actress had disappeared; and yet the palanquin was well isolated on the shoulders of the carriers, who resumed their journey and carried it off the stage.

This trick, which preceded by many years Bualtier de Kolta's experiment, in which also a woman was made to disappear, but by an entirely different process, was performed as follows:

The four uprights arranged at the four corners of the apparatus were hollow, and each contained at the top a pulley over which a cord passed. These cords were attached by one end to the double bottom of the palanquin, and by the other end to a counterpoise concealed in the canopy.

At the precise moment at which the curtains were drawn, the carriers disengaged the counterpoises, which, sliding within the uprights, rapidly raised the double bottom, with the actress, up to the interior of the canopy. The person thus made to disappear was quite slender and took a position such as to occupy as little space as possible. By making the shadows of the mouldings of the canopy and columns more pronounced through painting, and by exaggerating them, the affair was given an appearance of lightness that perplexed the most distrustful spectator.

This illusion appeared extraordinary, and has hardly been surpassed except by the disappearances effected by prestidigitators. The second trick that we shall describe is employed in the *Peau d'Ane*, for producing the fairy robes of the story—color of the sun, color of the moon, and color of the sky—required by the play. In the midst of a brilliantly illuminated procession come two porters carrying quite a large chest by its handles. Having reached the royal throne, they place the chest on the floor and raise its cover, when there is immediately seen a fabric of the color of the sun, that is to say, of a luminous golden yellow, that overpowers the dazzling luster of the cortege. Afterward, two other porters come with a similar chest, which, when opened, exhibits a fabric as if phosphorescent, of a slightly bluish white. The third chest contains the sky-colored robe, that is to say, of a celestial blue, luminous like the two preceding colors. These wonderful fabrics are moved about by the porters, who make them sparkle.

The bottom, B, of each of these chests is capable of being opened over a trap, A, and, by means of an electric light device, C, a powerful ray is directed upon the light and transparent fabric, which seems to be on fire.

The yellow light suffuses the fabric of the same color, envelops it, and incorporates itself with it. After the cover has been shut down upon the stage, the bottom is closed from beneath, the trap is shut, the light is extinguished, and the chest is carried away by the porters.

The same is done with a slightly bluish white fabric, and a white light for the moon-colored fabric; and then with sky-colored tarlatan and a light with a bluish tinge for the sky-colored fabric. These effects, if not the most astonishing, are at least among the most dazzling of any of those that have been employed in the theater.—*La Nature.*

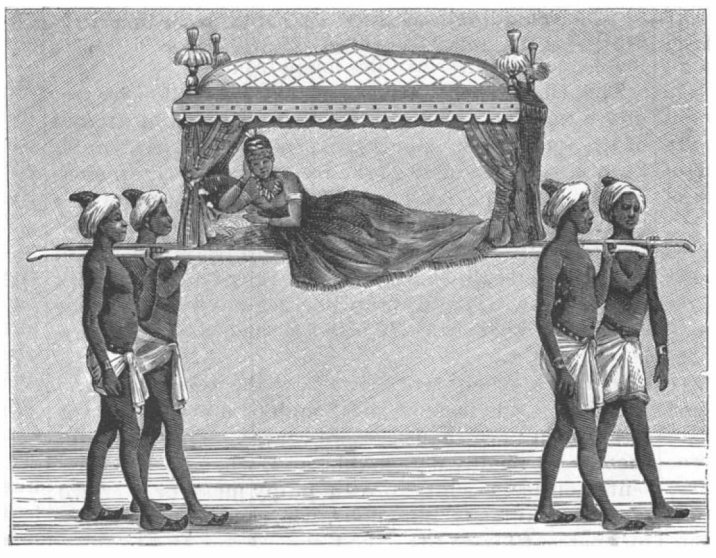

Fig. 1.—THE MAGIC PALANQUIN.

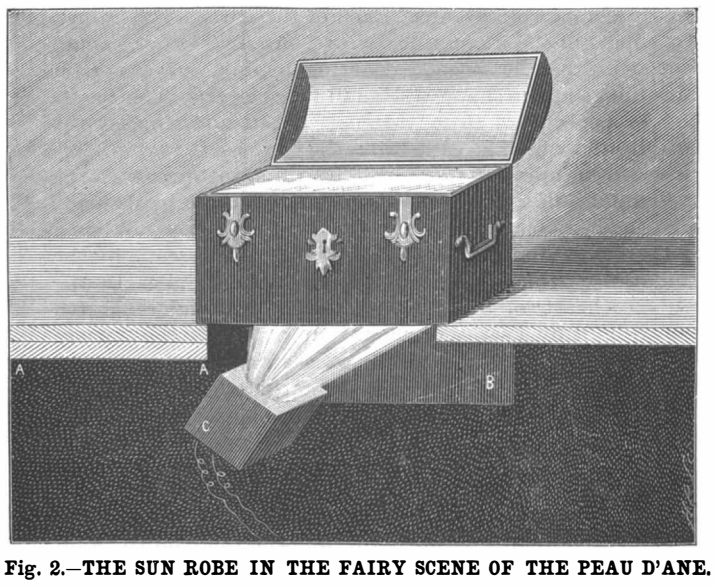

Fig. 2.—THE SUN ROBE IN THE FAIRY SCENE OF THE PEAU D'ANE.

A NOVEL method of strengthening iron castings has been brought out by Mr A. Jepson, of Manchester, England. The process consists simply in casting the metal around a wrought iron core. Thus, for thin plates, like stove plates, a thin wrought iron perforated plate is placed in the center of the mould, and the metal is poured around it. Wire (either straight or in coils), rods, bars, sheets or any form of iron, may be used according to the shape of the casting. It is stated that the close union of the cast iron with the wrought is assured by plating the wrought core with a thin coat of tin.

PLATFORM FOR FREIGHT CARS.

An inquiry into the cause of accidents which happen to trainmen on freight cars reveals the fact that the great majority of such accidents are caused by the trainman losing his footing in passing from one car to another, causing him to fall between the cars. This is sometimes owing to irregularity in the running of a

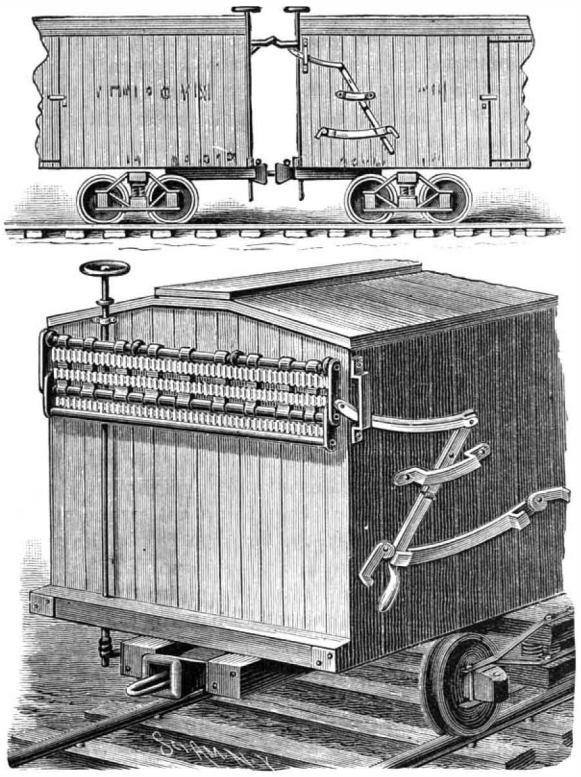

TYRRELL'S PLATFORM FOR FREIGHT CARS.

train, and at other times to inadvertence on the part of the man.

The frequency of these accidents has led Mr. Thomas C. Tyrrell, of Glendive, Montana, to devise a platform for the ends of freight cars, which will not only prevent such accidents, but will also facilitate the work of the trainman in operating the brakes.

A single car having this improvement applied is shown in perspective in the lower view, and the adjoining ends of two freight cars are represented in the upper view, showing the platform in the position of use. The platform consists of two parts hinged together, one of the parts being connected with the end of the freight car, so that it may be raised up into a horizontal position for use, or dropped down parallel with the end of the car when out of use, as shown in the lower figure of the engraving. The main portion of the platform is formed of three rods secured to end pieces, and cross bars connecting the said rods and supporting strips of corrugated iron which afford a suitable footing for the trainmen. The upper rod of the three is pivoted in eyebolts screwed into the timbers in the end of the car. Upon the lower or outer rod is pivoted the second part of the platform, which is free to turn upwardly, but its end pieces are shouldered so that it cannot turn in the opposite direction. This construction is designed to prevent injury to the platforms when the cars are forced toward each other, as in the case of coupling, or retarding or stopping the train by reversing the locomotive.

To the side of the car is pivoted a lever, which is connected with one of the end bars of the platform by a curved connecting rod formed in two sections, the shorter section being pivoted to the longer section, to allow the platform to turn upwardly when the space between the ends of the cars is very small. The lever which operates the platform is made in two parts hinged together, the lower end being arranged to swing outward laterally to permit of passing it over clips at the ends of a curved bar secured to the side of the car, and designed to hold the lever in either of the two positions in which it may be placed. The extremities of the curved bar are provided with eccentrics, either of which may be closed down upon the side of the lever to hold it in place in the clip.

This invention, which is covered by a patent, is well calculated to lessen the danger and discomfort of trainmen, and to facilitate the operation of the brakes.

When the car is not in use, the platform is folded down closely against the end of the car, as shown in the larger view of the engraving.

MAYER has calculated that, if the motion of the earth were suddenly arrested, the temperature produced would be sufficient to melt and even volatilize it; while, if it fell into the sun, as much heat would be produced as results from the combustion of 5,000 spheres of carbon the size of our globe.

© 1891 SCIENTIFIC AMERICAN, INC.

Patents and Copyrights.

The country has just completed its first century of experience with patent law. The first statute enacted concerning patents was in 1790. Mr. Madison is supposed to have been the author of the patent provision in the Constitution, he having introduced the clause in 1787. It is difficult to estimate the influence of patents upon the wealth and progress of the country. During the year after the first statute was enacted, but three patents were granted. Now thousands are granted yearly, and over 450,000 in all have been granted up to the present time. Counting the aggregate wealth of the country at $43,000,000,000, it is estimated that two thirds of it is due to inventions upon which patents have been secured. There is a close analogy between a patent and a copyright, the latter being practically a patent secured on some kind of mental invention put in type or found in a map, drawing, or picture of some kind. The subject of patents and copyrights has an unceasing interest for people who think, since it involves the very interesting question of the proper limits of property in ideas. There seems to be little doubt, however, that the notion of "perpetual property in an idea" is not tenable. The fact that both patents and copyrights are made the subjects of statute law is in itself pretty conclusive evidence that they are proper subjects of statutory limitation. It is said that if Shakespeare had taken out a copyright on his plays, and it had remained as the perpetual property of his legal heirs and assigns, a fortune would have been amassed equal in value to half of Great Britain. Such things show the absurdity of the claim that ideas and combinations of words should be property like other property.—*Boston Globe.*

The Faith of Inventors.

Unshaken faith in their ideas and a determined perseverance to overcome obstacles are gifts with which inventors have been endowed, or, in common parlance, they have their inventions "on the brain"—mount their hobbies and ride them continually. If they were influenced by rewards, or hopes of reward ultimately, it would seem, in the eyes of the world at large, that there was a "method in their madness," and that the tangibility of wealth was the terminus of the "hobby" race. But we find a large proportion of inventors unbiased and uninfluenced by any hope of wealth, money or reward. They labor and experiment as though their existence depended upon it; they labor with the hope only of ultimate success in accomplishing what they proposed to perform, and that labor is with them a labor of life and love. This labor is ever constant to their minds, ever uppermost in their thoughts, ever exerting itself in every movement and every action. They are determined, in overcoming every resistance. It is an example of the power of mind over matter—of intelligence over the powers of nature.

And what does the world not owe to inventors? Civilization, arts, and commerce are the fruits of the inventors' "hobbies," and the greater part of these fruits have been the product of toil, many years of labor, at a cost of life, privation, and poverty; yet such was the inventors' faith that all obstacles have been overcome, and often after the results are obtained the fruit is left for others to mature and gather. Galileo declared the world "did move," and a prison was the result. Columbus, on the eve of his discovery, was nearly being thrown overboard by his discontented mariners. Harvey, the discoverer of the circulation of the blood, and Jenner, who first practiced vaccination, may be cited as examples of how great discoverers may be treated by the world before their discoveries are appreciated. Among the mechanics of a later day, Fulton, who was declared crazy; Colt, who had to mortgage his little stock of tools to obtain money to make his pistol; Goodyear, patiently toiling to obtain his results in the manufacture of rubber: Howe, bravely meeting all adversity to finish and introduce the sewing machine, may be cited as a few—very few—examples of struggling but afterward successful inventors. The list might be extended almost *ad infinitum.* Yet when success is achieved and the true value of the invention appreciated, the tardy meed of praise is tendered to the persistent faith of the inventor who accomplished the results.

Nor are poverty and adversity all that tries the inventor's faith in his projects. The ridicule of the masses and the sneers of the ignorant are perhaps as great discouragements as the former. Want of appreciation must be the only excuse for such undeserved and unmerited echoes, which rebound upon the faith of the inventor.

We might say that all workers are inventors, few in the extreme, but all in a degree. He is an inventor who produces a cheaper product or goods of a better quality—who brings about a better result; he who simplifies a process—who modifies proportions of ingredients, or he who excludes an unnecessary portion from a machine, producing like results with fewer parts and motions. Anything of benefit to humanity is invention, and the author or producer is an inventor. A test of invention is the faculty to adapt means to an end without complexity, and an ability to advance human knowledge. Faith in this ability is omnipotent and tantamount to success, and this success is purchased with self-sacrificing and energetic action, and a zeal to introduce the blessing of the results of their inventions and labors.

It is well the inventor has faith in the project of his brain, and the prospect of ultimate success is ever before him, and the dream of each night is that the morrow will produce the brilliant results which his dreams have depicted. It is well that it is so; for were it otherwise—were there no inventors—the world would be even now a barbaric chaos.—*The American Engineer.*

Chinese Insect Wax.

In his notes on Chinese materia medica the late Daniel Hanbury, writing thirty years ago regarding Chinese insect wax, said that this wax was "secreted by *Coccus pe-la,* Westw., upon the branches of *Fraxinus chinensis,* Roxb., which is cultivated for the purpose, and possibly upon other trees. Some accounts of the habits of the insect by a competent observer are much required, the Chinese statements on the subject being extremely obscure." Since that time it has become known for certain that the wax is mainly secreted on the tree *Ligustrum lucidum,* but there was no proper response to Mr. Hanbury's suggestion until Mr. Alexander Hosie, M.A., of our consular service in China, took up the matter when he resided in the Szechuan province in order to study the conditions of British trade in that western region of the Celestial Kingdom. While there Mr. Hosie made several journeys for specific purposes, and a narrative of his observations was published in book form two years ago. This book we commented upon at the time, and now give an abstract of his observations regarding insect wax, a subject in which interest has recently revived.

Mr. Hosie's third journey was in one sense the most interesting of all, for, although the country traversed was not all new, the object was to study carefully, for the Kew authorities, the Chinese insect wax industry. A special chapter of the book is devoted to the insect, and the industry associated with it, in which he traces the career of the *Coccus pe-la* of Westwood from its cradle, through its busy and interesting life, to its dishonored grave. The chief object of Mr. Hosie's journey was to procure for Sir Joseph Hooker specimens of the foliage of the flowers, and trees, on which the insects are propagated, specimens of the living incrusted wax, samples of the latter as it appears in commerce, and Chinese candles made from it.

The Chien-chang valley, which is about 5,000 feet above the level of the sea, is the great breeding ground of the wax insect. One very prominent tree there is known to the Chinese as the insect tree. It is an evergreen, with the leaves springing in pairs from the branches, very thick, dark green, glossy, ovated and pointed. In May and June the tree bears clusters of white flowers, which are succeeded by fruit of a dark purple color. The Kew authorities have come to the conclusion that it is *Ligustrum lucidum,* or large-leaved privet.

In March, when Mr. Hosie saw the trees, he found attached to the bark of the boughs and twigs numerous brown pea-shaped excrescences. The larger of these were readily detachable, and, when opened, presented either a whity brown pulpy mass, or a crowd of minute animals like flour, whose movements were just perceptible to the naked eye. From two to three months later these had developed in each case into a swarm of brown creatures each provided with six legs and a pair of antennæ. Each of these was a wax insect. Many of the excrescences also contained either a small white bag or cocoon covering a pupa, or a perfect image in the shape of a small black beetle. This beetle is a species of *Brachytarsus.* If left undisturbed, the beetle, which is called by the Chinese the "buffalo," will, heedless of the *Cocci,* continue to burrow in the inner lining of the scale, which seems to be its food; the beetle is, in fact, parasitic on the *Coccus.* When a scale is plucked from the tree, the *Cocci* escape by the orifice which is made. Two hundred miles to the northeast of the Chien-chang valley, and separated from it by a series of mountain ranges, is the town of Chia-ting, in which insect wax as an article of commerce is produced. The scales are gathered in the Chien-chang valley, and are made up in paper packets each weighing about 16 ounces. Sixty of these packets make a load, and are conveyed by porters from Chien-chang to Chia-ting (in former years there are said to have been as many as ten thousand of these porters). They travel only during the night, in order to avoid the high temperature of the day, which would tend to the rapid development of the insects and their escape from the scales.

At the stopping places the packets are opened out in cool places, but in spite of this each packet is found to have lost on an average an ounce in transit. A pound of scales laid down in Chia-ting costs, in years of plenty, about half a crown, in bad years the price is doubled. [Compare with this the consular note in the *Chemist and Druggist,* April 27, 1889.] In favorable years a pound of scales will produce four to five pounds of wax. In the plain around Chia-ting the plots of ground are thickly edged with stumps varying from 3 or 4 to 12 feet high, with numerous sprouts rising from their gnarled heads, and resembling at a distance our own pollard willows. The leaves spring in pairs from the branches, and are light green, ovate, pointed, serrated, and deciduous. The tree is said in all probability to be the *Fraxinus chinensis,* a species of ash.

On the arrival of the scales from Chien-chang about the beginning of May, they are made up in small packets of from twenty to thirty scales, which are inclosed in a leaf of the wood oil tree. The edges of the leaf are tied together with a rice staw, by which the packet is suspended close under the branches of this ash, or white wax tree as the Chinese call it. A few rough holes are drilled in the leaf with a blunt needle, so that the insects may find their way through them to the branches. On emerging from the scales, the insects creep rapidly up to the leaves, among which they nestle for a period of thirteen days. They then descend to the branches and twigs, on which they take up their position, the females doubtless to provide for a continuation of the race by developing scales in which to deposit their eggs, and the males to excrete the substance known as white wax. This first appears as an undercoating on the sides of the boughs and twigs, and resembles sulphate of quinine, or a covering of snow. It gradually spreads over the whole branch, and attains, after three months, a thickness of about a quarter of an inch.

After the lapse of a hundred days the deposit is complete, the branches are lopped off, and as much of the wax as possible is removed by hand. This is placed in an iron pot of boiling water, and the wax, on rising to the surface, is skimmed off and placed in a round mould, whence it emerges as the Chinese insect wax of commerce. Where it is found impossible to remove the wax by hand, the twigs and branches are thrown into the pot, so that this wax is darker and inferior. The insects, which have sunk to the bottom of the pot, are placed in a bag and squeezed of the last drop of wax, and are then thrown to the pigs. The wax is used for coating the exterior of animal and vegetable tallow candles, and to give greater consistency to the tallow. It is also said to be used as a sizing for paper and cotton goods, for imparting a gloss to silk, and as a furniture polish.

Removing the Epidermis.

A few days since, says the Boston *Herald,* at the Massachusetts General Hospital, a little instrument, invented by Dr. Mixter, wonderful in its simplicity, constructed so as to separate quite large portions of epidermis from the subcutaneous tissue, was used for the first time.

The patient had been etherized, and had undergone operation for the removal of a cancerous growth from the left breast, and the wound thus made was quite an extensive one. The instrument was applied to the anterior portion of the right thigh, and three strips, about an inch wide by six inches long, were taken off and transplanted to the exposed surface of the breast. The operation of removing the skin and transplanting it to its new quarters did not occupy more than about six minutes. A very few days suffice to restore the denuded surface of the thigh to its normal condition, leaving few traces of the reparative process to which it has contributed, and, other things being equal, the surface from which the cancerous tumor has been excised will heal over by first intention, thus saving the patient from a prolonged and painful period of convalescence. Of course, every precaution is taken, by the use of sterilizing processes and antiseptic solutions, to render the operation thoroughly aseptic, so that the chances of inflammatory disturbances from bacterial sources are reduced to the lowest minimum.

The thickness of these delicate human plasters probably does not exceed one-sixtieth of an inch, and the resulting hemorrhage is not more than what one sees on a slight abrasion of the skin, or it may be compared to the sanguineous oozing one gets from too earnest tonsorial attention. The advantages of the new over the old method of epidermic detachment are obvious. It is expeditious, the sections of shaved cuticle are much larger and of a more uniform thickness than can be obtained by the most dexterous manipulator, and the chances of successful grafting are enhanced by the fact that the skin is transplanted while the cellular elements are in their full vital activity.

Water.

Elaborate work has been done by E. W. Morley relating to the volumetric composition of water. In his summary he says: For the present we may believe that water, when the gases are measured under ordinary temperatures and pressures, is composed of 2·0002 volumes of hydrogen to 1 volume of oxygen; or that under ordinary conditions the number of molecules in a given volume of oxygen is one nine-thousandth part greater than the number of molecules in an equal volume of hydrogen.

© 1891 SCIENTIFIC AMERICAN, INC.

Whitewashing Nero.

According to Signor Lanciani, the learned Italian writer in *Iron*, the Emperor Nero has been libeled. Instead of being the cruel tyrant he is generally represented to have been, he was a benefactor of mankind and a well-intentioned sanitary reformer. It has for centuries been commonly understood that Rome was set on fire and burned by Nero, in the year 64, either through brutal malice or drunken incapacity and indifference. Signor Lanciani's investigations put a very different interpretation upon the matter. Nero desired to make many changes in the streets of Rome by increasing their width and making many of them more direct, and also to introduce many improvements by reconstructing public buildings. His efforts in this direction were met by an opposition from property owners—it is a strange thing that property owners have not changed since Nero's time—and were also embarrassed by the fact that the city abounded in temples, altars, and shrines which were inviolate. While he probably made light of the property interest, religious sentiment the Emperor knew ought to be respected under all conditions and at all times, and he acted accordingly.

He directed two architects, Severus and Celar, to prepare plans for the rearrangement of streets in certain parts of the city, making them as near to straight lines and right angles as the hilly configuration would render feasible. Numerous public squares were laid out, and a system of sewers was planned. Regulations for buildings were prepared, in which it was provided that the height of houses should not exceed double the width of the street, that each house should be completely cut off from the adjoining buildings, that each house should have a portico in front, and that wood ceilings should be excluded from the first stories of buildings. Tents and booths were secretly prepared, and vessels were sent to various Mediterranean ports after grain, with orders to meet at the mouth of the Tiber on a certain date.

In accordance with Nero's plan, the city was fired in numerous places, and, of the fourteen wards, three were entirely destroyed, and seven were burned in great part. The crowds driven out of their homes found the booths in the outskirts of the city ready for them. The grain-laden vessels appeared in time, and the townspeople were fed and housed during the rebuilding, the whole plan having been carried into effect without exposure, famine, or loss of life, although the population of the city at the time was very large.

The Hair Worm.

The common hair worm of Europe is technically called the *Gordius aquaticus*, and the allied or representative American species is *Gordius varius* of Dr. Leidy, but we also have *G. longilobatus*, *G. robustus*, and *G. subspiralis*. In a volume now before us, entitled "Naturalist's Miscellany," published by Shaw & Nodder, London, 1791, we find an interesting illustrated article on *Gordius aquaticus*, from which nearly as much information may be obtained about the development of the Gordians as may be obtained from works on the subject published at the present day; for it seems that after the exclusion of the animal from the egg, very little about its subsequent development has been learned, between that period and its mature condition, when it looms up before us a perfectly formed and wriggled "hair worm." It was demonstrated more than a hundred years ago that the animal was not a vivified or animated horse hair, but that it was a distinct living animal, that had been developed through the media of *bona fide* eggs. Indeed, more than fifty years ago, after an experience of more than six months, it became manifest to us that a horse hair would never be transformed into a *Gordius*. We have taken them from water puddles, cabbage heads, moist earth, grasshoppers, ground beetles, and apple seed cavities—dark and light brown, red, pink, nearly black, pale and white, alive and squirming.—*S. S. R., in American Notes and Queries.*

Shading Greenhouses.

There is some difficulty in choosing a shading for greenhouses, as some materials wash off too quickly, and others not readily enough, as in the case of the common limewash. A correspondent in the *Gardener's Monthly* says he has tried many materials, but all have proved unsatisfactory. He found the following, however, very useful for many other purposes besides shading: Take one pound common whiting, one ounce of the best glue, and a quarter of an ounce of bichromate of potash, called also red alum. Soak the glue the day before using, melting in a common glue pot, and then dissolve the bichromate in warm water. Mix the materials together, and thin them down to the consistency required. These, after being exposed to the light, are almost as adherent as oil paint. Of course, by reduing the proportion of bichromate, the material can be made less retentive, but a coat of this wash on the greenhouse will last the whole summer, and even be troublesome to wash off, not to such a degree, however, as limewash It should be constantly stirred up while being used.

Power of Water in Motion.

About two months ago there was a dinner party at General Schofield's house in Washington. Among the guests were President Harrison, Chief Justice Fuller, the late Secretary Windom, Speaker Reed, Senator Sherman, and Senator Stanford, and Mr. Justice Stephen J. Field.

During the dinner the conversation turned upon mining operations in California, and Judge Field, whose knowledge of all matters relating to the Pacific coast is as extensive as his powers of narrative are entertaining, astonished the distinguished company by some of his assertions in regard to the force of the jets of water employed in hydraulic mining. He described the wonderful manner in which the streams from the hose cut to pieces and tear down the hills that hold the precious metal. Judge Field cited the Hon. James G. Fair as his authority for the statement that under a vertical pressure of 100 or 200 feet the force of the stream is sometimes so great as to hurl away or hold bowlders weighing a thousand pounds; and that it would be no more possible to cut through such a stream with a crowbar or an ax, where it issued from the nozzle, than to sever eight inches of solid iron with a penknife.

As Judge Field afterward informed Senator Fair, in a letter asking for expert testimony about the power of water applied by hydraulic machinery, these assertions were received by some of General Schofield's guests with smiles of polite incredulity. The eminent jurist felt that his position, for the moment, was somewhat like that of the Englishman who informed the King of Siam that in England water ofter became so hard that people could walk on it. It is not at all surprising that the facts gravely alleged by Justice Field should stagger even an imagination like the Chief Justice's, or strain the faith of so profound a believer in dynamics as the Hon. Thomas B. Reed.

In consequence of this incident, and for the vindication of his own reputation for veracity, Justice Field has collected from several of the highest authorities on practical hydraulics evidence and opinions that are of great interest.

Ex-Senator Fair tells Justice Field that at the Spring Valley gold mine in Cherokee, Cal., the water used in the hydraulic mining operations was brought in pipes and ditches from a distance of nearly 100 miles, and that the volume of water used on every working day in that mine amounted to three times the number of gallons consumed daily by the entire city of San Francisco.

Mr. Louis Glass, for 16 years the superintendent of the Spring Valley mine, assures Justice Field that he has seen an 8 inch stream, under 311 feet of vertical pressure, move in a sluggish way a two-ton bowlder at a distance of 20 feet from the nozzle; and that the same stream striking a rock of 500 pounds would throw it as a man would throw a 20 pound weight. "No man that ever lived," adds Mr. Louis Glass, "could strike a bar through one of these streams within 20 feet of discharge; and a human being struck by such a stream would be killed—pounded into a shapeless mass."

Mr. Augustus J. Bowie, of San Francisco, the author of a standard book on hydraulic mining, estimates that the stream from a six-inch nozzle, under 450 feet vertical pressure, delivers a blow of 588,735 foot pounds every second, equivalent to 1,070 horse power. "It is absolutely impossible," says Mr. Bowie, "to cut such a stream with an ax, or to make an impression on it with any other implement." Mr. Bowie adds that although never to his knowledge has a man been struck by such a stream as it comes from the pipe, several accidents have occurred where miners were killed by very much smaller streams at distances of 150 or 200 feet from the nozzle.

After an elaborate series of computations, Prof. Samuel B. Christy, of the University of California, an eminent authority on mining and metallurgy, reports to Justice Field that if a nozzle of from 6 to 9 inches diameter were specially arranged to throw a stream vertically upward against a spherical bowlder of quartz weighing 1,000 pounds, the vertical head being anywhere from 100 to 500 feet, the bowlder would be forced up until the diminished velocity of the stream established an equilibrium of pressures. There would be a point at which the upward pressure of the stream would exactly balance the gravity pressure of the bowlder, holding it, the half ton rock, there suspended. In practice, of course, the bowlder could not be balanced accurately upon the axis of the stream, but would fall to one side or the other. But if a large conical basket of iron bars were arranged about the nozzle so as to catch the bowlder whenever it should be deflected from the stream, and return it to the nozzle, the 1,000 pounds of quartz would be kept in play like a ball in a fountain. As to cutting these streams, Prof. Christy says that he has often tried to drive a crowbar into one of them. The stream felt as solid as a bar of iron, and, although he could feel the point of the crowbar enter the water for perhaps half an inch, the bar was thrown forward with such force that it was almost impossible to retain it in the grasp. An ax swung by the most powerful man alive could not penetrate the stream; yet it might be cut by the finger of a child, if the child were seated on a railway train moving parallel with the stream in the same direction and with the same velocity. That velocity would be considerably more than a mile a minute.

Justice Bradley, of the Supreme Court, has also tried his intellect upon the mathematics of the problem submitted by Judge Field. He delivers this opinion: "I can well believe all you say with regard to the tremendous force of streams issuing from the pipes of the miners under a large head of water. Of course, they would produce instant death if directed against a man standing near, and would probably cut his body in two."

The statements here presented in summary will not astonish engineering experts or members of the New York Fire Department. The average citizen, however, is accustomed to regard water as the least destructive liquid that can be put in motion, and he is familiar with no stronger manifestation of its power than the velvety touch of the stream from the Croton faucet.

We should say that the distinguished Californian upon the bench of the Supreme Court had amply vindicated his right to be heard with respect and perfect confidence by any dinner party on the subject of hydraulic pressure. Does it occur to General Schofield that in these facts there is the suggestion of a novel and most terrible engine of military defense against assaults at short range?—*New York Sun.*

Sale of Professor Koch's Lymph.

The following official rescript appeared in the German *Medical Gazette* of March 13, and a translation has been transmitted to the *Lancet* (London) for publication from the Foreign Office.

Professor Dr. Koch has published in the German *Medical Gazette* of January 15th last a description of the manner in which the lymph, discovered by him for the cure of tuberculosis, is prepared, and according to this description it appears that this remedy comes within the provisions of Section 1 of the Imperial Ordinance of January 27 of last year, and can therefore, with the exception of wholesale trade, only be sold by licensed chemists (apothecaries).

Chemists can at present obtain the lymph, prepared under the personal supervision of the inventor, only through his authorized representative, Dr. Libbertz, 28 Luneburgerstrasse, Berlin, N. W. It is supplied to them in special bottles of a capacity of 1 or 5 cubic centimeters. These bottles have glass stoppers covered with bladder and secured by a leaden seal bearing the letter "L." On one side they bear the name "Tuberculinum Kochii" in white letters on a black ground, on the other side a white label with the signature of Dr. Libbertz, and a note giving the date on which the lymph was prepared. Each bottle is accompanied by a printed paper containing instructions for its use.

With regard to the preservation and sale of the remedy in chemists' shops, the following regulations must be observed:

1. The "Tuberculinum Kochii" must be kept in the poison cupboard, and in the division reserved for alkaloids.

2. It can only be sold in the original bottles, and only upon the written order of an approved physician, and delivered to such physician himself or to a person authorized by him.

3. A record of the purchase and sale of the remedy must be kept in a special book, in which each bottle must be entered. The contents of the bottle, the date of preparation, of purchase, and of sale, the name of the physician to whom it has been sold, or eventually the removal of the unsold bottle from the shop, must all be noted.

4. If a bottle has not been sold within six months of the date of preparation marked upon it, it can no longer be sold or otherwise disposed of, but must be removed from the shop. Such bottles will be exchanged by Dr. Libbertz for others containing freshly prepared lymph free of charge.

5. The price of the "Tuberculinum Kochii" is hereby fixed (exclusive of the cost of packing) at 6 marks for a bottle containing 1 cubic centimeter and at 25 marks for one containing 5 cubic centimeters.

I have the honor to request you to cause the above regulations to be communicated to the chemists in your district for their guidance, and also to take steps to insure their due observance.

(Signed) DR. VON GOSSLER.

Berlin, March 1, 1891.

To the Governors of Provinces and the President of Police in Berlin.

The Doctor who Succeeds.

A physician who understands human nature, who plays with the baby, makes friends with the children, and listens to the woes of the good wife and mother, says a medical journal, is the fellow to whom the master of the house most cheerfully pays the largest bills. It isn't the medicine that's bottled up, but it's the comfort and consolation that are unbottled that mark the broad line between an unsuccessful and a popular physician.

© 1891 SCIENTIFIC AMERICAN, INC.

U. S. COAST LINE OF BATTLE SHIPS.

(*Continued from first page.*)

The complement of twelve boats and one balsa are stowed well above the flash of the guns, and are handled by means of powerful cranes.

ARMAMENT.

Four 13-inch breech-loading rifles.
Eight 8-inch breech-loading rifles.
Four 6-inch breech-loading rifles.
Twenty 6-pounder rapid-fire guns.
Six 1-pound rapid-fire guns.
Two Gatling guns.
Six torpedo tubes.

The four 13-inch and the eight 8-inch guns are mounted in pairs within six Hichborn turrets, two of which are erected upon the main deck and the remaining four upon superstructure deck; the former containing the larger and the latter the lesser guns. These turrets are of a type which has been generally adopted by the Navy Department, similar protection to the guns having already been placed upon the monitors Monterey, Puritan, Monadnock, and Amphitrite, and also upon cruisers Nos. 2 and 6.

The 6-inch guns have local protection in addition to splinter bulkheads, shields, and automatic shutters. The turrets are all mounted in redoubts. The 13-inch guns are about 18 feet above the water, and have an arc of fire sweeping across the deck and 45 degrees on both sides back toward the center or body of the ship, making a total arc of fire of 270 degrees for the guns in each of these turrets.

This, as can be seen, gives a converging fire, *i. e.*, the power of training the guns from both ends toward a common point, directly opposite the middle of the ship, and of concentrating the shot within fifty feet in a straight line from the ship's side, in a broadside action.

The 8 inch guns are about 25 feet above the water, and are high enough to fire above the 13 inch gun turret, having an arc of action of 164 deg., being able to fire across the center line of the ship, the projectile crossing the same before reaching the ends of the vessel. The 6 inch guns have a train of 145 deg., and can cross the center line of the ship, extending beyond the hull, within 170 feet from either end of the vessel, showing that the main battery can train within a distance of about 700 feet on either side of the vessel.

The rapid-fire guns are so arranged that a radiating fire of shot around the vessel will destroy any venturesome torpedo boat or other light craft coming within range, and will be particularly effective in forming a destructive fire against the endeavors of the enemy to work such of their larger guns as are only partially protected in action, and whose effectiveness depends very largely upon gaining the initiative.

Torpedo nets are to be carried which will completely incase the vessel, thus precluding the possible effect of torpedo fire from the enemy.

The facilities for handling the ammunition are of the best. Passages connecting with all magazines run the length of the armored inclosure, along which, and near to the armored tubes and passing scuttles, are distributed auxiliary magazines to obviate delay in transmitting ammunition during an engagement.

ARMOR.

Thickness of side belt armor	18 in.
" " end diagonal belt	14 "
" " 13 in. B. L. R. redoubts	17 "
" " " " " turrets	17 "
" " 8 in. B. L. R. redoubts	8 in. and 10 in. resp.
" " " " " turrets	6 " and 8½ " "
" " conning tower	10 "
" " " " tube	7 "
" " casemate	5 "
" " 6 in. B. L. R. local protection	5 "
" " 20 pdr. local protection	2 "
" " armor deck	2·75 in. and 3 in.

The side belt armor is 7 feet 6 inches wide, 3 feet above and 4 feet 6 inches below the water, extending along the sides for 148 feet, then taking a diagonal course inboard at an angle of 45° for a longitudinal distance of 24 feet at each end (making a total broadside armor of 196 feet), passing around and supporting the

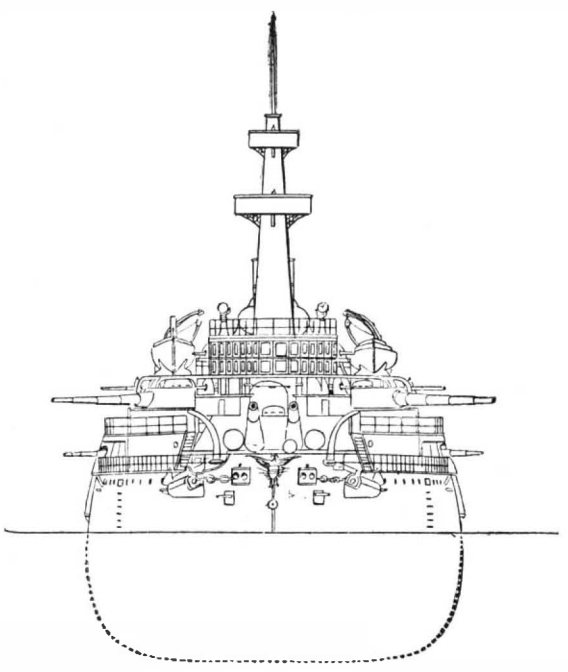

FRONT VIEW OF LINE OF BATTLE SHIP.

armor for the 13 inch gun turrets. On top of this side armor is placed a steel deck 2¾ inches thick, under which are the magazines and machinery. Above this belt of side armor is placed the casemate with a backing of ten feet of coal. Forward and abaft the redoubts are 3 inch protective decks of steel, which turn down to 4½ feet below the water line, and on top of these decks there is a belt 7 feet high by 6 feet wide, filled with water excluding material similar to "woodite." The steering gear is below this deck protection.

Provision has been made to protect the hull from the blast of the guns by thickening with heavy steel plates where contact necessitates this precaution, and across the decks under the muzzles of the thirteen inch guns, circular flash plates have been provided to prevent the blast from splintering the planking. The hatch coamings, skylights, etc., coming near the blast of the guns are removed in action, and heavy battle plates sunk flush with the deck are substituted to afford the necessary protection.

The side belt, diagonal belt, redoubts and turrets have behind the armor a backing of wood and thick plates backed up again by heavy channel bars.

The machinery is inside of and protected by the armor inclosure, also by 12 feet of coal bunker back of the side armor, and a reserve coal bunker above and under the armor deck; the engines and magazines are also protected by coal, besides which, there are four thicknesses of skin "penetration" before reaching the engines and fire rooms.

The engines are of the twin-screw, vertical, triple-expansion, inverted cylinder type; diameter of cylinders as follows: High pressure, 34.5"; intermediate, 48"; low pressure, 75"; stroke, 42". There are four double-ended boilers, 18' × 15' in diameter, and two single-ended boilers (donkey), 8½' × 10' in diameter. Each boiler and engine is in a separate water-tight compartment, in order to localize possible injury.

The normal coal supply is 400 tons, but a coal bunker capacity of 1,800 tons is provided. With the bunkers full she can steam at full speed (16 knots) for 10 days, or a radius of action of about 4,000 knots; and going at 10 knot speed this endurance is increased to 60 days, or a radius of action of 15,000 knots.

The vessel is very much "cut up" forward to facilitate maneuvering by offering as little resistance to the water at that point as possible; the ram, accordingly, being at the water line.

The complement consists of 460 persons, officers and men combined. Good quarters and accommodations have been provided, and all the latest sanitary improvements are to be installed to insure efficiency and thoroughness in lighting, ventilating and drainage.

Electric Ship Log.

There have been many attempts to produce a ship's log the recording apparatus of which should be operated by means of electricity. In the opinion of the London *Times*, however, these attempts have all failed in practice, in consequence of the inability to overcome three main difficulties. These are the necessity of having a perfectly water-tight chamber in the log itself, that of having a battery, and of preserving perfect insulation in the connecting towline. These difficulties have been overcome in a very simple and ingenious manner in Granville's electric log, recently shown at Messrs. Elliott Bros., 101 St. Martin's Lane, London. Although it is essentially an electric log, it has no battery whatever, the log, the iron hull of the ship, and the ocean together forming the battery. A portion of the log is made of zinc, which provides one element, while the iron plates of the ship form the other, the sea water constituting the exciting solution. The log is of very simple construction, and has only two moving parts, a revolving head and a small internal worm wheel. The head is connected with the worm wheel gearing, and every sixth revolution of the former is communicated, by means of a spring contact, through the towline to an indicator placed on the bridge or in the chart house of the ship. When the log is in use the sea water has free access to all the working parts, and serves to keep them clean and lubricated. The towline, which is very pliable, is made of a braided tanned netting twine, inside which a number of copper wires are wound spirally and joined together at each end. This line can be handled and coiled by a sailor in the same way as any other line and is readily connected with, or disconnected from, the log. The indicator consists of a small metal circular box, with the necessary internal mechanism and external dials and pointers. The apparatus, after many months' trial at all speeds, has shown itself to be an efficient means of accurately indicating, at any part of the ship where an indicator is fixed, the total distance run, and also, at any time, the rate of speed per hour. One of these logs has been fixed on board the Orontes, and it is also in use in the Argentine navy.

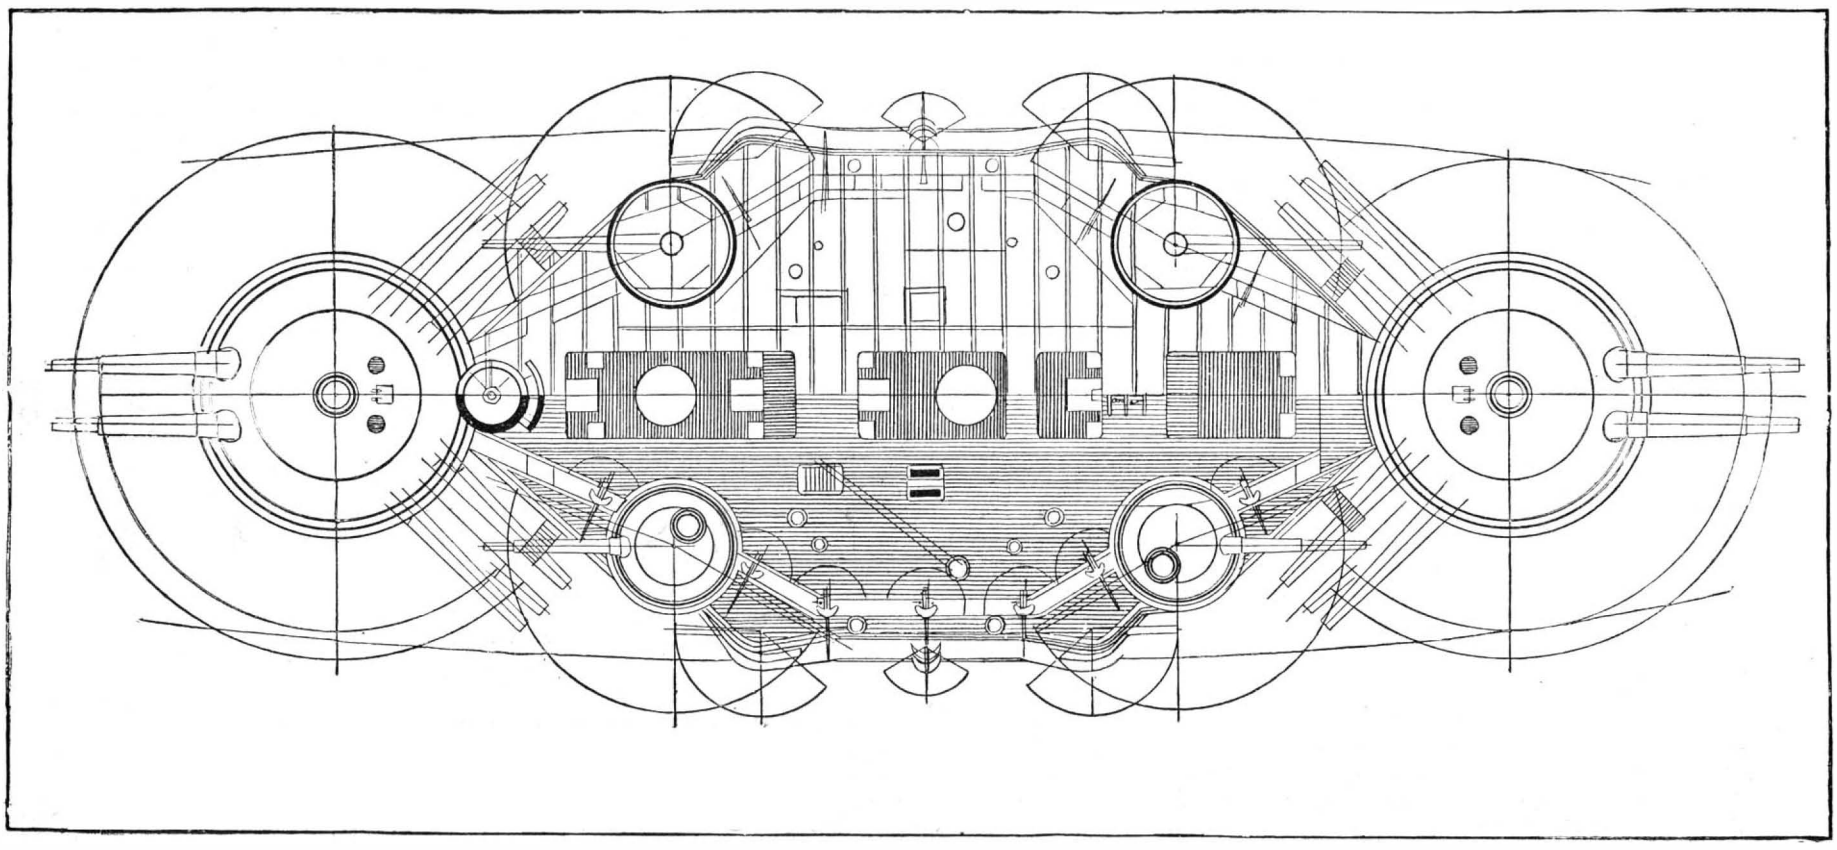

DECK PLAN SHOWING ARCS OF ACTION OF GUNS OF NEW LINE OF BATTLE SHIPS.

© 1891 SCIENTIFIC AMERICAN, INC.

THE HORSE RACE ON THE STAGE.

One of the "hits" of Messrs. Montreal and Blondeau's "Paris Port de Mer," played at the Varieties Theater, is a horse race. Three genuine horses, ridden by three genuine jockeys, start off at full speed, and make the circuit of the hippodrome of Longchamps. We have here a real effect plus an effect of illusion. The horses are free from all restraint, and really gallop, but the ground disappears under their feet in moving in a direction opposite that of their running, and the landscape as well as the fences also fly in a direction contrary to the forward motion of the horses. Our readers have before their eyes the very simple arrangement by means of which this remarkable theatrical illusion is operated. The three horses run upon three tracks independent of each other, but arranged side by side. Our engraving represents, in section, one of these tracks, formed of an endless matting of cocoanut fiber analogous to the mats that serve for wiping the feet, but of thicker and closer texture. This belt, which is three feet in width, runs over two drums placed on each side of the stage, and is tautened by a third cylinder on a level with the stage floor. It is supported by a series of wooden rollers, which are placed very close together and revolve on pivots. The drum mounted to the left is capable of being set in rapid motion by an electromotor, which receives the current from a battery of accumulators placed on Feydeau Street, in the vicinity of the theater. The starting and the velocity of the machines are controlled through commutators maneuvered by handles.

At the moment of the race each horse appears upon one of the tracks. The electric current is sent into

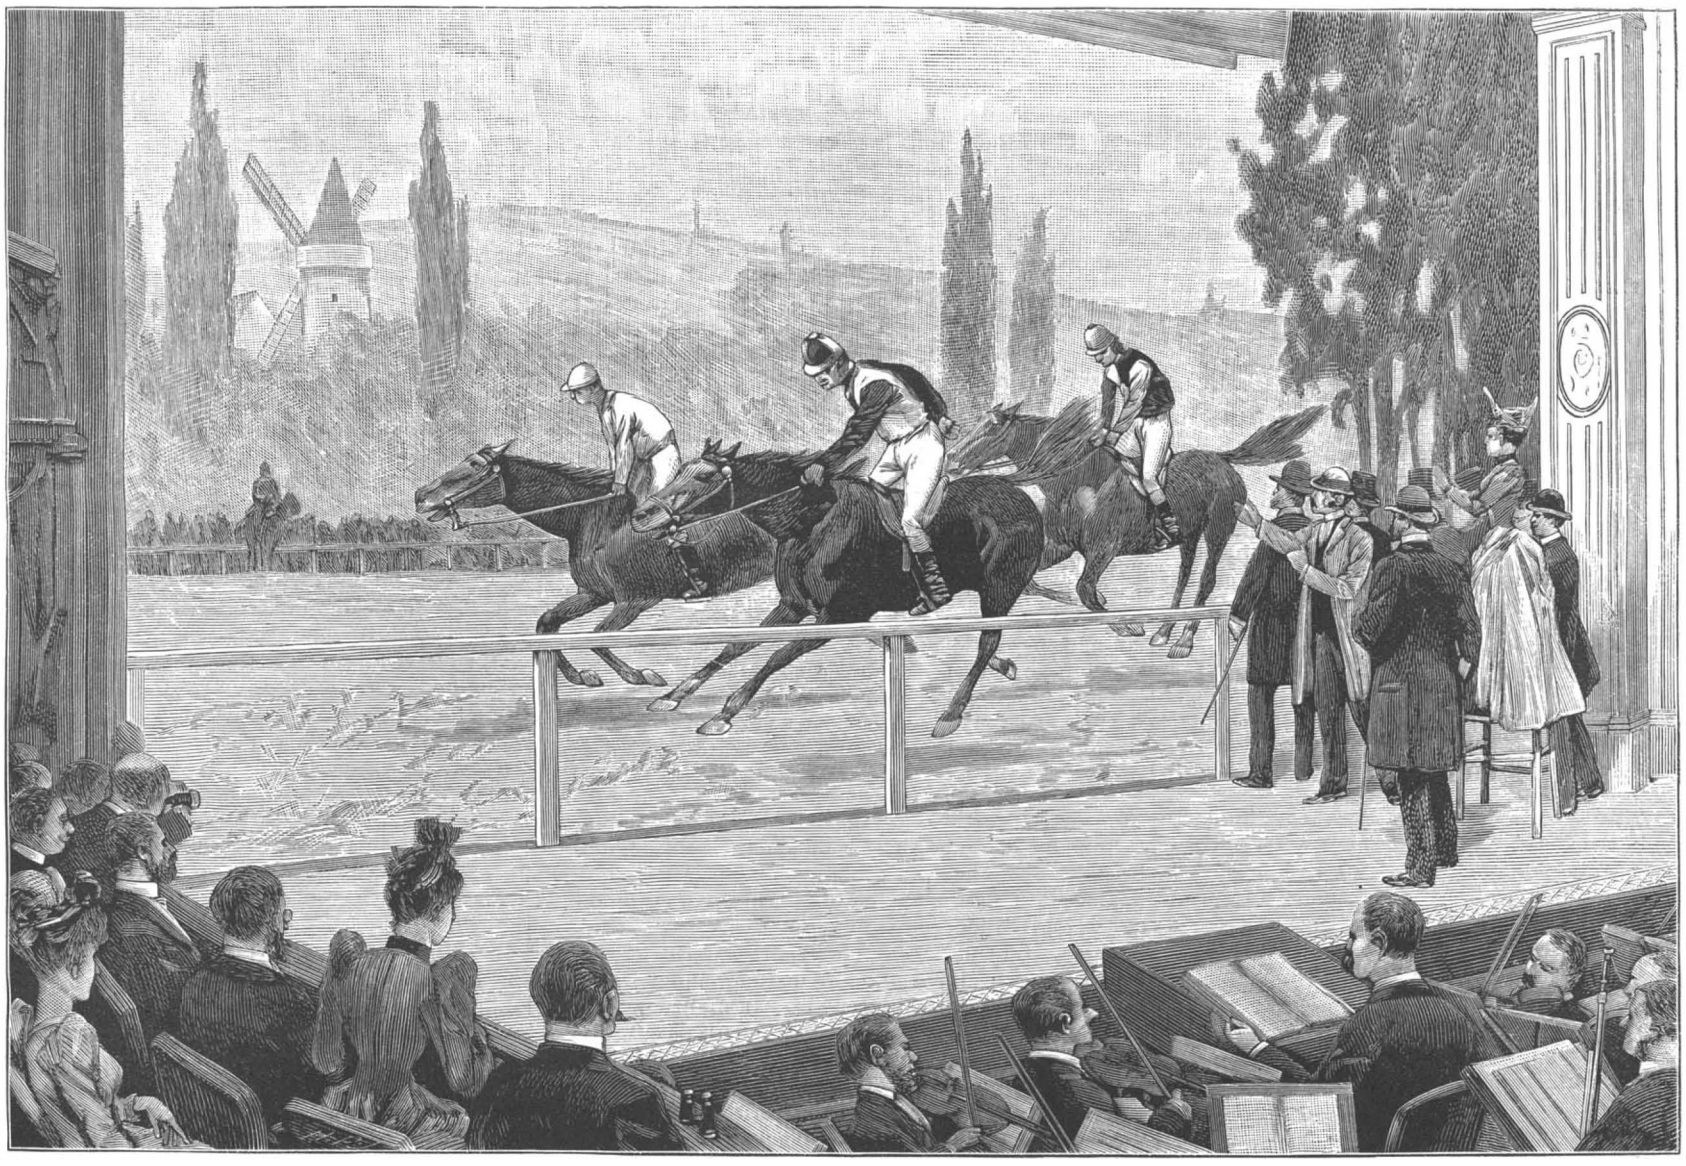

RACING HORSES ON THE STAGE—EFFECT FROM THE AUDIENCE.

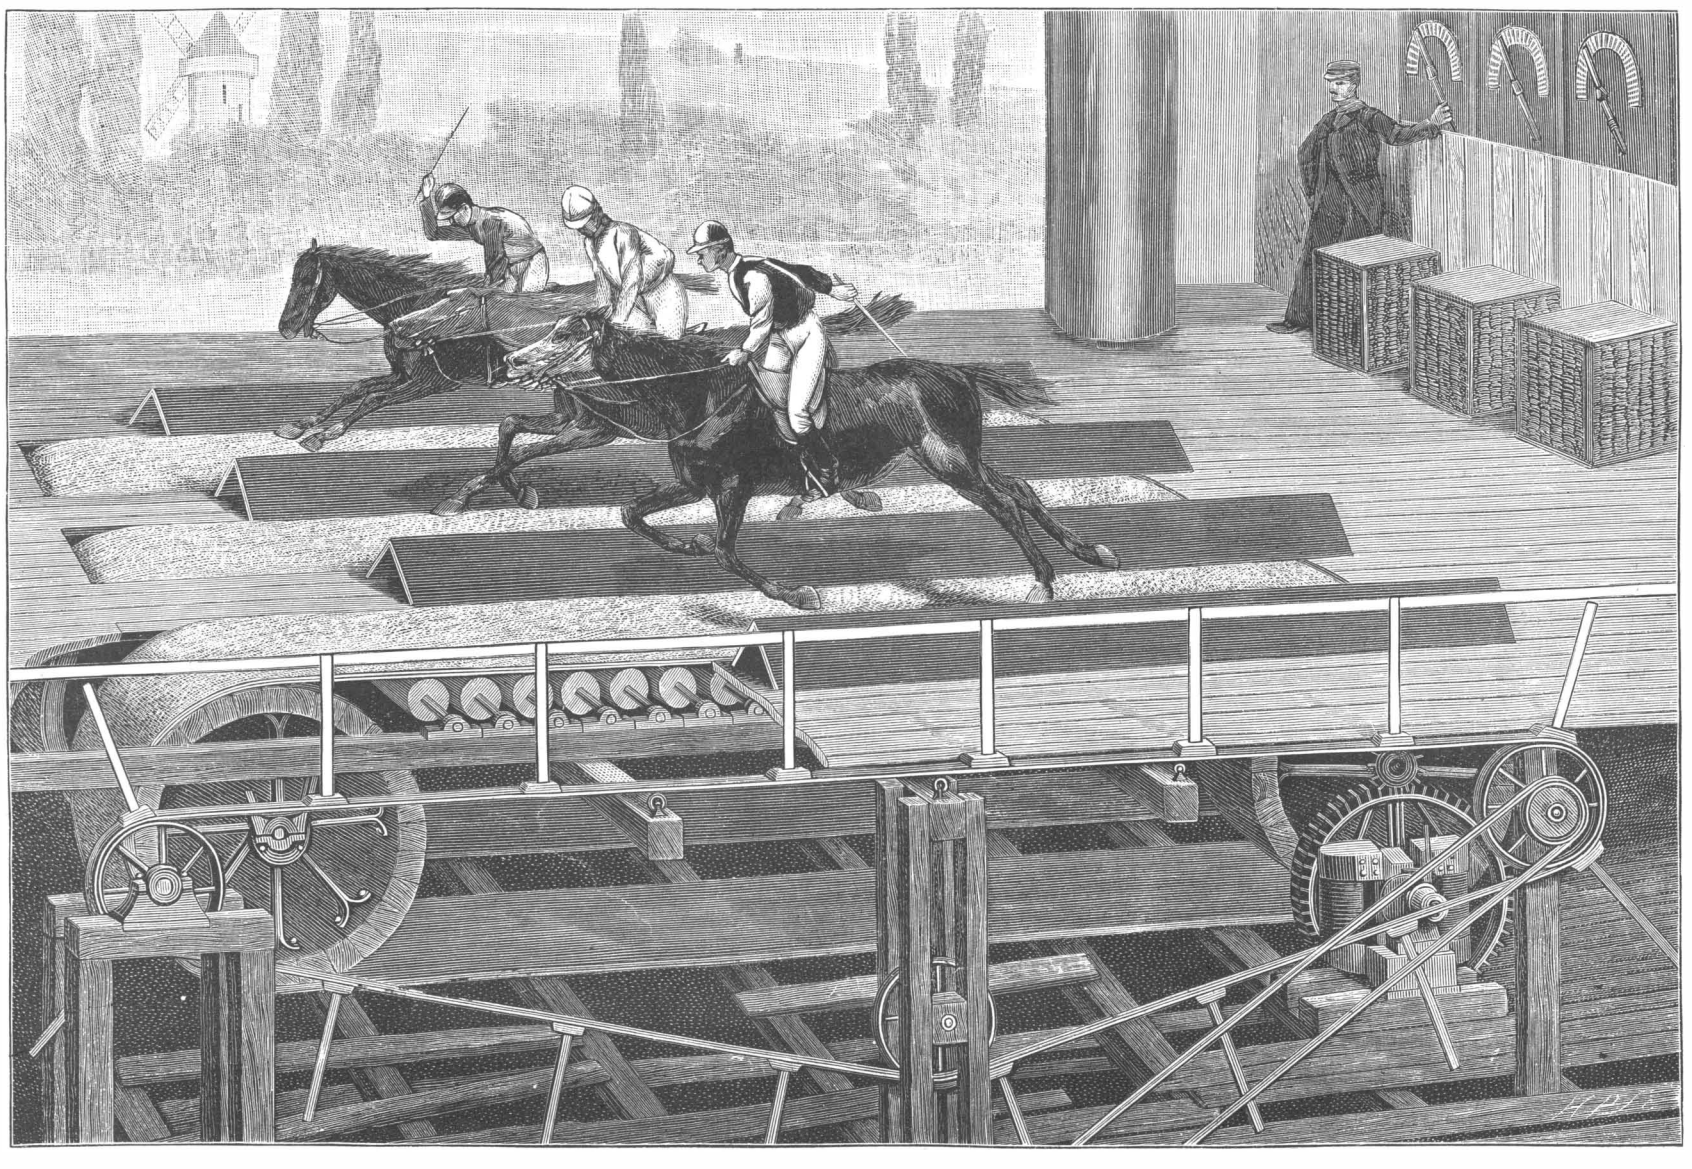

RACING HORSES ON THE STAGE—MACHINERY UNDER THE STAGE FOR DRIVING ENDLESS BELT.

© 1891 SCIENTIFIC AMERICAN, INC.

the motors, and the belt begins to move. The horses, feeling the ground sliding and carrying them backward, first begin to move their feet in order to maintain their position; and then, on the one hand, the motion of the track becoming swifter, and, on the other, the jockeys exciting them with voice and spur, they begin a gallop which is so much the more marked in proportion as the motion of the belt under their feet is more rapid. Yet, despite the speed, the courses always occupy the center of the tableau circumscribed by the frame of the stage, and the background of which is formed of a panorama of Longchamps. The immobility of the horses in space results, then, from the double effect of their projection forward under the impulsion of the jockeys and of their carriage backward by the flight of the ground. If the belt should happen to come suddenly to a standstill, the horse and his jockey would be dashed against the wall; in the opposite case they would fall head over heels backward.

An equilibrium is maintained between the two impulsions by very careful attention to the commutators that regulate the running of the motors, and consequently that of the drums and belt. The illusion is completed by the unwinding of a canvas in the rear, 95 yards in length, representing the panorama of the country as seen from the stands of Longchamps. This canvas, which is first wound around a vertical cylinder on the right hand side of the theater, unwinds therefrom and afterward winds around a duplicate cylinder on the left hand side of the theater. The two cylinders are set in motion by a windlass maneuvered by manual power. Finally, the fence whose pickets are seen flying in the foreground, in the same direction as the panorama, is mounted upon an endless belt running around two drums actuated by a Popp air motor. The panorama unwinds in a minute and a quarter, and, during this time, the endless belt moves at a velocity of 3,200 feet per minute, or, in other words, at the rate of 12 or 15 leagues per hour. The authors of this truly curious illusion are Mr. L. Brader, who constructed the tracks, Mr. Solignac, who installed the electric motors, and Mr. Justin.

The apparatus used in this race is very similar to that used in the American play "County Fair," which has been running so long in this city. The effect is very real, and the interest of the spectators is kept up throughout the race. We believe that the idea was adapted from the American play. We are indebted to *L'Illustration* for the engraving and article.

Bleach and Caustic Soda from Salt.

The process by which bleaching powder and caustic soda is manufactured from common salt is quite simple, as well as economical. The salt is introduced into a still constructed of stone and provided with suitable tubes for heating, and a sufficient amount of nitric acid is added to transform it into nitrate of soda. Upon applying a gentle heat, the decomposition begins, and the nitrate of soda is rapidly formed. As the nitrate of soda is extremely soluble in a hot solution, the operation is so conducted that the solution of nitrate of soda in the still is saturated at the boiling temperature. The solution is then run out from the still and cooled. Owing to the great difference in the solubility of nitrate of soda in hot and cold solutions, a great mass of the salt is deposited on cooling. Over half of the quantity of nitrate of soda in solution at one hundred and ten degrees to one hundred and twenty degrees Centigrade is deposited on cooling the solution down to twenty degrees Centigrade. The crystals obtained by this cooling are separated from the mother liquor, which, together with more salt and nitric acid, is again sent to a still, and the operations repeated.

The gases resulting from the reaction in the still, composed principally of nitrosyl chloride and chlorine, pass into a vessel containing nitric acid and manganese dioxide in suspension, where nitrate of manganese is formed and chlorine is given off. The chlorine evolved passes through a washer, and then into a bleaching powder apparatus.

In this process all of the chlorine combined with the sodium in salt is obtained in the form of bleaching powder, and the gas passing to the bleaching powder chamber is pure chlorine gas, thus avoiding the weak and impure chlorine obtained in all magnesia processes, and avoiding the loss of two-thirds of the chlorine which is incurred in the Weldon process.

The crystals of nitrate of soda obtained by cooling the nitrate of soda solution coming from the still are mixed with two or three times their own weight of oxide of iron. The mixture is then heated to a red heat in a current of air in a cylindrical furnace. The nitrate of soda is completely decomposed and the gases evolved with an excess of air are passed over an oxidizing substance, such as manganese dioxide, a manganite, a manganate, or a permanganate of the alkalies or of the alkaline earths.

The nitrate of manganese liquor is heated and evaporated to a plastic consistency by the hot gases coming from decomposition of the nitrate of soda. The nitrous gases coming from the decomposition of nitrate of soda and nitrate of manganese finally pass, after treatment with air and steam, into the usual apparatus for condensation of nitric acid. Nitrate of manganese evaporated to the plastic condition mentioned contains about ninety per cent MnO—2. It will thus be seen that both the nitric acid and manganese are recovered. The mixture of iron oxide and soda is taken from the furnace and lixiviated. If the heat has not been carried too high, the mixture is in good condition for lixiviation. If lixiviated with hot water, a caustic liquor of thirty to forty degrees Baume may be obained practically free from carbonate of soda, so that when this liquor is evaporated and mad into caustic soda, an extremely high test of caustic soda may be obtained. —*Ameri an Paper Trade.*

How to Make a Blackboard.

Select seasoned pine lumber of the first quality and good width. Plane it well, joint nicely, and glue a sufficient number of boards together to make the required blackboard four feet in breadth. For end pieces use scantling which will dress two by three inches; saw them a few inches longer than the proposed width of the board; cut a slot through the pieces on the flat side, so as to admit the ends of the board, with an inch t spare at the top; into this spare space insert a key, and drive home. To hold the end pieces in position the board may be dovetailed at its lower edge. Form a chalk trough by nailing a strip of half inch stuff, five inches wide, to the lower edge of the board, and nailing to this strip, on its outer edge, a similar one two and one-half inches wide. Bevel or round off the inn r edges of the end pieces in a workmanlike manner, and smooth the surface of the board with fine sandpaper before painting. The board may be supported by leath r straps attached to the top. No nails or screws ar used, because they compel the forming of cracks whenever th re is shrinkage, by holding the several boards apart; by l aving the whole free to slide in the slot, and following up all shrinkage with a key, occasionally tightened, a perfect surface is secured.

DIRECTIONS AND RECIPES FOR PAINTING.

No paint in which there is oil should be used. Holbrook's, Sherwood's, "Alpha," and "Eureka" liquid slatings are first class paints. They come in pint, quart, and gallon cans, and are ready to use at any moment, and can be kept for years if tightly corked. One gallon will paint 250 square feet, and costs $6 to $8. Any school furnishing house will fill orders.

The following is taken from Wickersham's "School Economy:"

"To make one gallon of paint take 10 ounces pulverized pumice stone, six ounces pulverized rotten stone, three-quarters pound of lamp black, and mix with alcohol enough to make a thick paste. Grind the mixture thoroughly, and then dissolve 14 ounces of shellac in the remainder of the gallon of alcohol. Stir the whole together and th paint is ready for use."

The composition named below has been tried upon old boards and new with xcellent success. Dissolve gum shellac in alcohol, and mix with it lamp black and flour of emery. No more lamp black and flour of emery should be used than is necessary to give the required black and abrading surface, and sufficient gum to hold the materials together, and confine the composition to the board. The thinner the mixture, the better. The lamp black should first be ground with a small quantity of alcohol to free it from lumps. Apply with a common painter's brush, and when dry smooth with pumice stone.

A still cheaper preparation, though hardly as durable, may be made and applied by any school teacher before nine o'clock on a summer morning, and used in a half hour thereafter. For fifty square feet of board take four ounces of common glue, three ounces flour of emery, and just lamp black enough to give an inky color to the preparation. Dissolve the glue in three-quarters of a quart of warm water, put in the lamp black and em ry, and stir until there are no lumps, then apply t the board with a woolen rag smoothly roll d. Put on two or three coats, evenly, and you have a nice surface at a cost of about thirty cents for material. You may call this the "Poor District's Paint."

Caution. No pupil should be allowed to erase with his hand, or a wet eraser, from this or any other board.

Quoting again from Wickersham: A cheap and serviceable black surface may be made by the following recipe: Four pecks of white finish or white coating; four pecks of fine sharp sand, four pecks of ground plaster; four pounds of lamp black; four gallons of alcohol or good whisky. This quantity will make a mixture sufficient to cover twenty square yards. A little flour of emery will prevent the mixture from "setting" immediately, thus giving time to put it on the wall with the necessary are. If emery be not used, only a small quantity of the mixture can be put on at a time, and this is, perhaps, the better way.

The wall which is intended to be covered with the black surface should be plastered like the rest of the room, with the exception that the black mixture takes the place of the white coating, and is put on in the same manner. After the black surface is on the wall, it must be carefully dampened and rubbed in order to fill up the pores, and make the surface hard and smooth. If the old surface be well moistened, a new surface, composed of the same mixture, may be applied. It must be remembered that the black surface requires much more working with the smoothing trowel than the white finish.

PLASTER BLACK WALL.

Nearly or quite all black walls in this portion of the State, made within wooden buildings, have failed to stand. The mortar seems of poor quality, and the lath, constantly springing beneath the pressure of the hand while marking, causes the plastering to crack and fall in a very short time. To prevent this the room should be sheeted inside the studding, furred and lathed on that, and the first coat of plastering pressed in against the sheeting with great care. A very firm wall is thus secured. The black belt should be four feet wide, and come within two and one-half feet of the floor. It should surround the room. A chalk trough should extend its entire length, and it should be bounded at its upper edge by a simple moulding.

PAPER BLACK SURFACE.

When care has been taken to secure a good wall, strong manila paper, which is manufactured for the purpose, may be smoothly pasted on "hard finish," and then painted with liquid slating. It has proved durable in some instances, its durability depending, however, very largely on a smooth surface beneath.—*Minn. Teacher.*

Cradina.

In 1880, in a communication to the French Academy of Science, M. Bouchut reported that he had found the juice collected from the common fig tree (*Ficus carica*) to contain a powerful ferment capable of digesting albuminoid substances, thus confirming a belief of the ancients that the juice possesses digestive properties (*Pharm. Jour.* [3], xi., 250). This ferment is now the subject of a paper by Dr. Mussi, in which he reports its isolation and describes its properties (*L'Orosi*, Nov., p. 364). Juice collected from the fruit and branches of the fig was filtered to remove the serous portion from the insoluble, the latter repeatedly washed with water and the washings added to the filtrate. This liquid, which after repeated filtration was obtained limpid was distinctly acid in reaction, and when placed in contact with moist fibrin digested it completely. It was evaporated to a small volume, again filtered, and treated with absolute alcohol, which threw down a plentiful white precipitate that dried, when exposed to the air, to a dark yellow amorphous mass. This, when treated with water, swelled up and imparted a milky appearance to the liquid, but a clear filtrate from it, though it gave the reactions of vegetable albumen, had no digestive power. The residue, insoluble in water, dissolved readily upon the addition of a trace of acid or alkali, and the solution, placed in contact with moist fibrin, effected complete and true digestion. To the ferment thus isolated Dr. Mussi gives the name "cradina," from *krade*, the name given by the Greeks to the part of the fig with which they specially associated the digestive property. It contains nitrogen, and in the dry state it forms a friable, semi-transparent, dark yellow, amorphous mass, yielding an amber-yellow powder. In water it swells, but does not dissolv , though upon being shaken it imparts to the liquid a milky appearance. When dissolved by the aid of alkali or acid a concentrated solution is dark yellow, but becomes colorless upon being diluted. Cradina differs from pepsin in maintaining its digestive power in an alkaline liquor, and from papain or papayotin in being insoluble in water, not precipitated from solution by alcohol or lead acetate, and in its activity not being diminished in the presence of hydrochloric acid. In a neutral liquid it is devoid of digestive power and it has no reaction upon starch.—*Pharm. Journal.*

AT a recent meeting of the Engineers' Club of Philadelphia, Mr. Rudolph Hering continued reading a paper on the corrosion of iron and steel, and referred to galvanic action as a principal cause. He gave the results of experiments on this subject, and principally of those made by Mr. Thomas Andrews, of England. Wrought iron was placed in connection with numerous steels and cast iron, and exposed to sea water for about 300 days. From these it was found that metals corroded much faster wh n in galvanic connection than otherwise. The wrought iron (Wortley best scrap) resisted corrosion better than ith r steel or cast iron. The electro-chemical position of the steel changed frequently with reference to wrought iron, indicating that corr sion took place alternately in the wrought iron and steel. The position was almost constant, however, when connecting wrought and cast iron, indicating corrosion to take place almost entirely in the latter. Gravimetrical results were also given, which showed the amount of corrosion in grains per square f ot, per annum, under the conditions assumed in the xperiments.

© 1891 SCIENTIFIC AMERICAN, INC.

APPARATUS FOR SCOURING WATER-WAYS.

In works like increasing the depth of rivers, channels, and harbors, it is the highest grade of engineering to devise methods of supplementing nature by means of mechanical devices in such a manner as to cause the work to be done mainly by natural forces.

Mr. Holden, the inventor of the system of scouring the water-way, illustrated by our engraving, has grasped this idea and has patented an effective device, by means of which sand on river and harbor bottoms may be loosened and floated so that the natural eddies and currents may carry it away.

According to this invention, two sets of pumps are mounted upon the deck of a suitable boat, preferably a heavy tug boat, and connected with two sets of pipes extending from the deck of the boat upon platforms supported by stays from a mast. From these two sets of pipes hang flexible pipes provided at their lower ends with nozzles, the nozzles of the water pipe alternating in position with the nozzles of the air pipes. The pipes are further stayed by guy ropes from the sides of the tug, and the nozzles are furnished with transverse arms, as shown in Fig. 2, from which are suspended heavy weights for holding the flexible pipes in a vertical position. Water is driven with great force through the water pipes, thereby stirring up the sand and other material at the bottom, and the air forced through the air nozzles, in bubbling up through the water, tends to float away the particles dislodged by the water jets, so that the natural current of the water will carry the sand or other material to a much greater distance than it would if the water jets alone were used. Although this apparatus will generally be carried by a vessel or float of some kind, it may be operated from a dock or temporary structure.

We understand that this invention is very effective in its operation, and bids fair to play an important part in engineering works of this class.

We are informed that arrangements have been made with the Aransas Harbor Company, of Aransas Harbor, Texas, whereby this invention is to be applied at once for dredging Aransas Harbor and the bay, up to Aransas Harbor. It is expected that the depth of the water can be increased thirty feet in less than sixty days by the use of this apparatus.

Further information regarding this invention may be obtained by addressing Mr. E. G. Holden, Fulton, Texas.

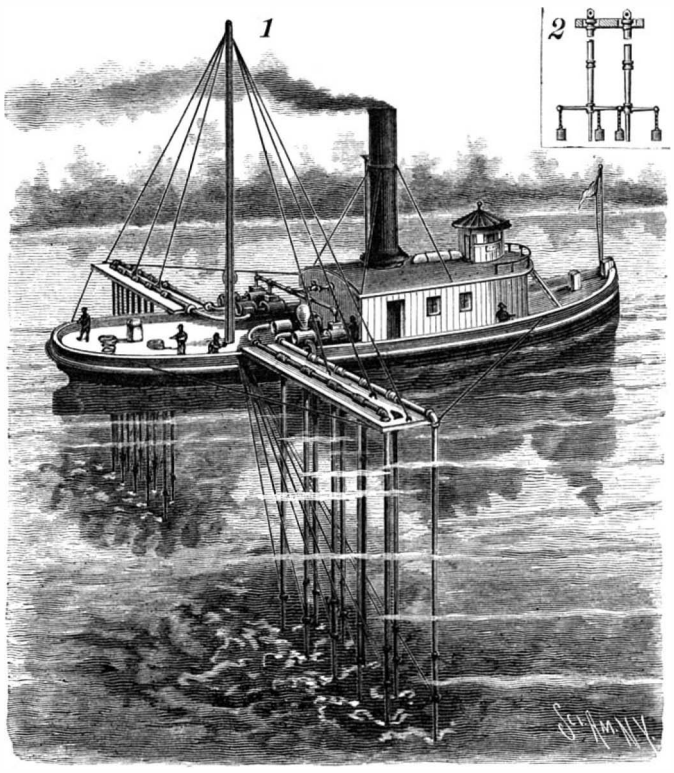

HOLDEN'S APPARATUS FOR DEEPENING CHANNELS.

The Smoke Nuisance can be Easily Abated.

Something over a year ago the municipal authorities of Chicago began to move in dead earnest against the owners of steam-making plants, manufacturers, railroads, hotels, etc., for their constant violations of the ordinance which declared the emission of volumes of black smoke from chimneys, smoke stacks, etc., to be a nuisance. Hundreds of prosecutions were instituted and fines to a very large aggregate amount were levied. The result has been, says the *Railway Master Mechanic*, that the nuisance has been to a large extent abated. This has been accomplished very largely by the use of devices which force jets of air in sufficient quantities into the furnace to secure complete combustion. This method has proved satisfactory on both locomotives and stationary engines, and has helped largely to clear the atmosphere of Chicago from the black smoke which soft coal produces.

The Chicago & Northwestern has abated the nuisance on 64 locomotives and on 166 stationary boilers, in its depots, office building and shops; the Pittsburg, Chicago & St. Louis on 18 locomotives, one boiler in its shop, and has contracted to equip all other engines running into Chicago; the Pittsburg, Fort Wayne & Chicago has ten locomotives equipped; the Chicago & Northern Pacific is engaged in equipping all its locomotives running into Chicago; the Lake Shore & Michigan Southern has equipped 68, and that number comprises all the locomotives running into the city, including passenger, freight and switch engines; the Chicago, Rock Island & Pacific has equipped 24 locomotives with new devices and repaired 36 old ones, some of them having been in use for the past six years, and has equipped the boilers at its elevators A and B; the New York, Chicago & St. Louis has equipped 8 locomotives and contracted for ten more, which will cover all the engines this road has running into the city; the Chicago & Erie has equipped 18, and has assured the department that it will continue the good work until all the engines running into the city stop their smoke; the Chicago & Grand, Trunk is now engaged in equipping all its engines running into the city, it has seven equipped and has promised to finish them all before summer; the Belt Road has equipped three locomotives and the boilers at the Dearborn station; the Chicago & Eastern Illinois has equipped nine new and repaired 16, that had been in use several years; the Baltimore & Ohio has all its engines equipped running into the city, 35 in number, and reports being highly pleased with the result; the Illinois Central has succeeded in stopping the smoke on 12 of its engines and promises a complete abatement of the smoke nuisance in the near future; the Michigan Central is engaged upon 39 of its engines running into the city, and has 13 of them already working satisfactorily. These results are very satisfactory, and establish beyond a question that it is practical to abate the smoke nuisance. Many of the other roads running into the city have made experiments during the past year, but have reported little progress and a good many failures. The department has decided that sufficient time has been given to those who have not yet complied with the ordinance and a vigorous prosecution will be commenced against those who have neglected or refused to comply. Much more has been accomplished in abating the nuisance in factories, hotels and office buildings.

Pump or Injector.

We know of an engineer who had the question asked him by his employer if it would not be better to have an injector for his boiler than the power pump he was using, "because all the heat went right back into the boiler again, and heating the feed water." This is the way he figured it out to see what he had better do:

If 1,000 pounds of water is to be pumped into the boiler by an injector, raising the temperature of the water in doing so 70°, as one heat unit will be required to raise one pound one degree, $1{,}000 \times 70 = 70{,}000$ heat units are required to raise 1,000 pounds 70°. Taking the total heat of steam from 62° as representing 1,145 units of heat, this work will require $70{,}000 \div 1{,}145 =$ 61 pounds of steam, to make which, assuming an evaporation of 8 pounds per pound of coal will require $61 \div 8 = 7\frac{5}{8}$ pounds of coal to do the work with the injector.

Taking 1,000 pounds pumped by the power pump run by a belt driven primarily by a Corliss engine, against a pressure of 60 pounds, equal to a height of 120 feet would require $120 \times 1{,}000 = 120{,}000$ foot pounds of work to be performed, or nearly 4 horse power, for a minute. The engine would use 30 pounds of steam at the outside per horse power per hour, or one-half a pound per horse power per minute. The 4 horse power therefore would need $4 \times \frac{1}{2} = 2$ pounds of steam. This two pounds of steam, on the same evaporation as with the injector, would require one-quarter of a pound of coal to do the work.

Another method he tried was to take a pump duty of 70,000,000 foot pounds per 100 pounds of coal as a basis, a low duty. Therefore one pound of coal would do a duty of 700,000 foot pounds, but as the work he was to do was but 120,000 foot pounds, it would require but its proportion of the pound of coal, or about one-fifth. From this figuring he reasoned that the injector was not going to be so economical as his pump, especially when he would not consider the raising the temperature of the feed water in the matter, because he used a feed water heater and he considered he was getting that heat for nothing, since otherwise he would throw it away.—*Boston Jour. Commerce.*

A Sky Rocket Boiler.

At Pittsburg, April 4, the boiler of the West End Gas Company exploded. The boiler was an upright one and it went straight up through the roof over Foley's livery stable, which is three stories high, and then over a row of frame buildings, in the rear of the stable, and up into a lot on Steuben Street, a distance of about 500 feet. No one was in the building when the explosion occurred and its cause is not known.

Where Does Light Go?

The question put where a transparent surface has has been made translucent, as in the case of a cut, frosted or ground surface given to glass, is applicable to light generally. Where does light go? What becomes of the darting, shooting, piercing ray? These questions are equally to the point, whether we accept the theory of emission or of undulation, but particularly as to the latter.

To obtain as full a comprehension of the simple object as possible, let us, for the moment, consider that the expression of movement of light is in a right line—a right line only. This is an effect on the senses which we may say we know practically. Undisturbed, so far as we can calculate, the movement will go on indefinitely and forever; but when disturbed, we call the manifestation deflection (bent as to course), refraction (broken as to course, or a violent deflection), and reflection (doubled back as to course, or the most violent action to which light is susceptible).

Now, if we imagine light to be a solid bar, we will observe, on the basis of what is here advanced, that it might perform all the movements that we are ascribing to a single ray of light, and, if properly projected, as light is, it might go on indefinitely, bending, coiling and twisting through all creation. But we always conceive the idea of light by multiples—we speak of a ray when we really mean a whole bundle of rays, how many it is ever impossible to enumerate. So, continuing the figure of the bar, let us fill our horizon with an infinite quantity of bars, projected from an ever-lasting and ever-moving force, as they go on bending, coiling and twisting, until the sphere of our surrounding is filled and bar meets bar, each with the projection of the other, derived from the same imperial source, and propelled by the same majestic energy. Where do the bars go? On the light principle they cease to be bars, as light ceases to be light when motion becomes rest. With no means of progress or continuance except upon each other, we have come to the inevitable halt of the senses over the conception of an irresistible force and an indestructible body, for bar thus circumstanced cannot displace bar, and with the cessation of action the bars are no more on the principle of light. It is the Greek of nature meeting Greek with the natural product of nihilism after action. In this way light is said to be decomposed.

The same analogy may be carried into our conception of sound, where two identical vibrations neutralize each other and produce silence, and the same with air—the same with water.

Then may we not account for the loss of light as exhibited by the photometer in transmission, through a mass of prisms and reflecting surfaces, of the ground glass or the frosted globe, as perfectly natural? For, in the passage, ray has met ray and become extinct. This warfare is eternal—it is going on everywhere. Otherwise the universe would be all light, and primal sources would in no way be needed to combat the everlasting tendency to what is darkness to the senses.

Thus then we may reasonably conclude that the loss which we experience in transmission of light is simply a constant tendency of one ray to kill another as nothing else can, and as the prisms and surfaces are multiplied the loss is increased, and *vice versa*. Such at least appears to be the law of the elements that are inherent in matter and of a primary character.—*J. A. Price, Amer. Gas Light Jour.*

Sanitary Qualities of Watercress and Onions.

The watercress is a plant containing very sanitary qualities. A curious characteristic of it is that, if grown in a ferruginous stream, it absorbs into itself five times the amount of iron that any other plant does For all anæmic constitutions it is, therefore, specially of value. But it also contains proportions of garlic and sulphur, of iodine and phosphates, and is a blood purifier, while abroad it is thought a most wholesome condiment with meat, roast or grilled. The cultivated plant is rather more easy of digestion than the wild one. Botanically the onion belongs to the lily family. The odor of the vegetable, which is what makes it so unpleasant, is due to a volatile oil, which is the same as that in garlic, though in the onion it is milder and naturally does not last so long. There are, besides, easy ways of removing at once all unpleasantness from the breath. A little parsley or a few grains of coffee, or even a swallow or two of milk, if taken after eating, proves an effective remedy. Boiled onions are the least objectionable in regard to odor, and are as easily digested as any. The oil in the onion passes off in the water in which the vegetables are boiled, and if the kettle be kept closely covered and the water changed after they have boiled five minutes, and then again ten minutes later, there will be no odor through the house, and the onions will be white instead of gray, as they so often are. Besides being rich in flesh-forming elements, raw onions are especially good in breaking up a heavy cold, they are also stimulating to fatigued persons and are otherwise beneficial.

© 1891 SCIENTIFIC AMERICAN, INC.

The Teredo.

In the office of General Manager C. J. Smith, of the Oregon Improvement Company, are a number of cans of some poisonous compound intended to prevent the terror of Puget Sound, the teredo, from destroying piles or other timbers placed in the water. The stuff is to be sent over to the sound to be tested. A number of things have been tried to protect piles from the teredo, such as creosote, asbestos, coal tar, castor oil, strychnine, etc., but the only perfectly sure method for preventing the teredo from eating up piles is to make them of iron. Covering wooden piles with copper will protect them as long as there is no place in the joints of the copper where a teredo can poke his nose through, but if once the copper gets torn it is goodby, John, to the pile. So far the poisonous compounds used on piles seem to have pleased the teredo much, seeming to act as a condiment on what must be rather a monotonous bill of fare, and assisting in its digestion. The man who finds out the poison which will act as an antidote to the teredo will have a good thing. It may be that if the piles were washed with whale oil soap every day it might keep away the teredo, or if the piles were greased with tallow, perhaps the long, slimy, wriggling pest might not be able to get its teeth into the pile, as they would slip off. The people on the sound can rejoice that the teredo does not go ashore and hunt for tall timber, as if it did the lumber output of that section would soon be *nil*. It might be that if the sawmills on the sound would throw their sawdust into the sound the teredo would learn to like it, and would prefer "cut feed" to cutting up the piles themselves, and thus some good might be accomplished.—*Portland Oregonian.*

Wealth of the Northwest says: Not only sawmill owners, but all who build docks, booms, or log in the salt waters of this coast find in the teredo an enemy who works in the dark and one that is as uncertain in its movements as it is certain to be felt in some way not profitable sooner or later. Certain localities whose waters are salt and tributary to the Pacific Ocean are reported as free from the ravages of this pest. Mr. J. S. Mundy, of the Bellingham Bay Milling Company, at Fairhaven, Washington, is on record as saying that he has recently inspected piles at that point—under a dock—that have been in use for six years, and did not find a pile entirely destroyed by teredoes, though some were so badly eaten that it was necessary to replace them. Cedar posts under the mill were found in a condition that did not require that any of them should be replaced. On Gray's Harbor the statement is made that the teredo has never done any damage. There may be some local causes in both these places for this healthy condition, so to speak. It is thought by some that rough water caused by continuous winds prevents this worm from getting in its work. In other localities swift currents from tides may be a preventive. At any rate certain points seem more exposed to their destructive work than others. It may be that these worms haunt certain localities—as fish do—and avoid others, without any cause known to man. At Tacoma, Seattle, Victoria, and other points on the sound the teredo has cut docks down in a year's time, causing heavy damage, and in some instances loss of life. By some it is thought that after six months a pile is unsafe, but this is an extreme opinion. However, in the case of a dock that was cut down by these worms at Seattle within a year after it was built, this opinion is not very much out of the way.

The *Commercial News*, of California, says on this subject that "the teredo is a nuisance and expense here, but the great Northwest coast, which tries in many ways to prove its superiority over California, in one respect at least carries off the palm, and that is in teredoes. Captain Gibson, of the bark J. D. Peters, has presented this office with the section of a pile which was in a raft waiting to be used in the building of a wharf at Seattle. The pile had been in the water only thirty days, and when hauled out on the beach it was noticed the teredo had got in its deadly work, and the stick was, before it had ever been used, rendered worthless by this pest. The section referred to is about a foot in diameter, and contains, by actual count, 212 holes bored by this industrious woodworker. When this log was on the beach, it is said the little pests kept up boring, so that placing the ear near the pile it sounded as if a sawmill was in active operation. With such an illustration of the futility of using wood for wharves, why is it that here and at the north some plan is not devised by city or State authorities to make permanent improvements on the water front of each city? Docks built of stone, though the first cost is greater, would in a very short time be cheaper than wooden wharves constantly needing renewal, and this section of a pile, which is on exhibition at this office, is an object lesson which merchants, taxpayers, and particularly officials having charge of the wharves in this and other Pacific coast cities should study."

In the year 1884 it is said that one of the large sawmill companies of Puget Sound lost 50,000,000 feet of logs that were allowed to lie in the water until the teredo had ruined them.

So far nothing has been found to protect these piles that is not too expensive for general use. Some one will one day solve the problem and realize a fortune.

Treatment of Diphtheria.

Dr. Guntz, of Dresden, has had great success in the treatment of diphtheria with bichromate of potash in water containing carbonic acid, which he has found by numerous experiments on animals, as well as in the course of extensive clinical observation, to be entirely harmless. For an adult 600 grammes (about a pint) are ordered per diem, in which are dissolved three centigrammes (about half a grain) of potassium bichromate. The whole quantity is directed to be taken in about half a dozen doses, regarding which it is important to observe that they must not be taken on an empty stomach; a little milk or gruel should therefore be swallowed before each dose. Children, of course, take smaller quantities, according to age. They can be given the medicine in a tumbler mixed with some fruit sirup, and they do not generally object to it. At the commencement of the disease Dr. Guntz washes the mouth out with a 1 per cent solution of permanganate of potash containing 0·1 per cent of thymol, or with a corrosive sublimate solution of the strength of 1 in 3,000, taking care, in the latter case, that none is swallowed, and that the mouth is well rinsed with water afterward. In the case of young children the pharynx must be brushed out with the solution. Sometimes iodoform is employed, being applied on the tip of the finger to the affected spots. Dr. Guntz specially remarks that potassium bichromate, though harmless in the way described, is by no means so when in pills, powders, or in solution in non-carbonated water.—*The Lancet.*

RECENTLY PATENTED INVENTIONS.

Engineering.

SMOKE CONDUCTOR. — An improved smoke conductor, patented by Mr. James R. Johnson, of Charleston, S. C., is designed to adjust itself automatically where it is coupled to the cars of a train, and to retain its connection whether the train is on a curved or a straight track, the whole being arranged so that it may be regulated from the cab of the locomotive. A section of the conductor is mounted upon each car, and one is provided for the locomotive and another for the tender. The forward end of the conductor enters the smoke stack, and a valve is provided for directing the steam and products of combustion from the locomotive smoke stack through the rearwardly extending conductor. In front of the smoke stack is arranged a flaring mouthpiece opening into the stack opposite the conductor, the mouthpiece serving to gather air as the train moves forward, and assist in propelling the sparks, gas and steam through the conductor.

ASH PAN FOR ORE ROASTING FURNACES.—Mr. Simon B. Dexter, of Glendale, Montana, has recently patented an ash pan for ore roasting furnaces, especially those described in a former patent by the same inventor. The ash pan is provided with a water discharge pipe and arranged in connection with the water grate so as to receive the cooling water discharged by the grate and convey it, together with the ashes, to the discharge pipe leading away from the furnace.

PORTABLE SELF-RAISING LADDER.—Mr. Benjamin H. Burling, of Fort Ann, N. Y., has recently patented a portable self-raising ladder, which is readily placed in position for use. It is provided with an auxiliary ladder at the upper end, which may be used as an extension of the main ladder, or as a platform or fire escape, which may be projected horizontally into the windows of the upper stories of a building. The lower portions of the side pieces of the main ladder are thickened and provided with tubes, two on either side of the ladder, for conveying hot or cold water or steam for extinguishing fires. The ladder is supported upon a vehicle furnished with a tongue at either end, so that it may be drawn in either direction without the necessity of turning it around.

Railway Appliances.

AUTOMATIC RAILWAY SIGNAL.—Calvin W. Wilhelm, Mauch Chunk, Pa. This signal is set and locked by means of a lever depressed by the wheels of a train and actuating a series of locking levers and latches, the semaphore being released by the closing of an electric circuit as the train proceeds. The electrical parts are so arranged that one battery at each station operates two magnets; and a train may be signaled a block and a half to the rear.

SAFETY ATTACHMENT FOR RAILWAY CARS.—Robert M. Smith, Cherokee, Iowa. This is a support or platform adapted for attachment to the end of a car adjacent to the coupling device, whereby the cars may be coupled or uncoupled by a trainman without exposing himself to injury. A further safeguard is also provided to prevent the train hand from being jolted from the platform.

Mechanical.

A MACHINE FOR LAYING AND SPOOLING WIRE, patented by Messrs. G. B. Johnson and J. O. Hill, of Princeton, Kan., is designed for use with any variety of wire, or other material usually wound in coils, but it is especially adapted to be used in handling barbed wire fencing, the machine being constructed so that the wire may be laid and stretched at one operation. The frame carrying the wire-winding mechanism is mounted on wheels; a shaft journaled in the frame carries a spool containing the wire, and a rod pivoted to the rear end of the frame carries at its free end a guide roll to guide the wire to the spool. The machine has all the necessary adjustments to adapt it to the use for which it is intended.

DYEING MACHINE. — Mr. Joseph Hussong, of Camden, N. J., has recently patented a new dyeing machine. This machine is provided with a vat furnished with a cage supported by bell crank levers, the levers being connected by links and arranged to receive oscillatory motion from a rock shaft, the motion of the bell crank levers being made variable by placing the connecting rod in different notches of the arm of the rock shaft.

CHECK PUNCH.—Mr. George L. Banks, of Fall River, Kansas, has patented a check punch which will perforate a check with figures representing the amount of its face value. The device is provided with a series of figure punches mounted in a frame and capable of being brought to the same point before being operated, a registering and indicating device being provided for bringing the punches into the proper position for use. A pair of feed rollers is employed to move the check forward one space for each figure punched, the lower roller of the pair being mounted on a shaft operated by a pawl and ratchet connected with the punching key or lever.

AN IMPROVED GRINDING MILL for gradually reducing grain to different degrees of fineness for flour and feed has been patented by Mr. Le Grand D. Harding, of Colfax, Washington. In this mill one of the grinding rollers has in its periphery an annular recess to which is fitted the annular projecting portion of a second roller, the two rollers running in frictional contact with each other, or with the grain passing between them. The rollers are made hollow from the center to the ends, to receive spouts for conveying away any dust that may be discharged from the ends of the rollers. The grain is fed to the rollers by a feed roll working in a hopper located above the rolls. The rolls being made hollow in the manner described, afford a ready escape for any heat that may be generated in grinding, and by driving one roller by frictional contact with the other, an economy in power is secured.

Agricultural.

POTATO DIGGER.—Mr. John Franklyn Fowler, of Brooklyn, N. Y., has patented a potato digger, formed of a beam to which is attached a U-shaped hanger carrying a plow or point adapted to pass under the hill of potatoes, and provided along its rear edge with a series of divergent fingers or rods projecting upwardly and rearwardly, so that as the potatoes and the earth are raised together by the point as the implement is drawn forward, the potatoes are crowded over the rods or fingers, when the earth falls through and the potatoes are discharged over the rear extremities of the fingers upon the ground.

Miscellaneous.

WATER TROUGH.—Bernhard Koeppe, Kearney, Neb. This invention relates to an improved trough for watering stock, fowls, etc., and provides a device to be connected to the water supply to control the inflow of water, so that the desired height of water in the trough will be uniformly maintained by the automatic action of the controlling mechanism.

TRUSS PAD.—Joseph Garcia, Paterson, N. J. This invention provides a pad which may be conveniently filled with a liquid or with air as often as desired, while the interior of the pad may be effectually and thoroughly cleaned when necessary.

A NEW SERVICE AND CASH CHECK, patented by Mr. Geo. D. Smith, of New York City, is especially designed for use in restaurants where it is the rule for waiters to collect from the guests or patrons the value of the food served. His invention is designed to assure to the proprietor full returns for the value of the food served, and to prevent collusion between the employes and patrons, without offense to either, and to secure a more satisfactory service. The check is provided with a series of numerals indicating successively higher values of food served, and provided with a series of dots or marks opposite each of the numerals, so that like orders of the same value may be registered by punching out successively the dots or marks of the series opposite the corresponding numerals of the check.

NEW BOOKS AND PUBLICATIONS.

DIE DECORATIVE KUNST-STICKEREI. I. Aufnaeh Arbeit. By Frieda Lipperheide. Berlin. 1890. Franz Lipperheide.

The first part of "Artistic Embroidery" deals principally with cut-out figures or patterns attached by stitches or other means on the cloth. The handsomely illustrated book gives full instructions for making such artistic embroidery, and also gives description and illustrations of the tools necessary for the work. The book contains besides the text a number of colored plates and wood engravings illustrating beautiful designs of embroidered covers, curtains, chairs, etc., copied from original designs of the Spanish, German, Italian, and French schools of the fifteenth, sixteenth, and seventeenth centuries. The book, although primarily intended for the use of ladies doing handiwork, will no doubt be welcomed in many shops, factories, etc., requiring artistic designs for embellishing the goods manufactured.

The Charter Gas Engine Co., of Sterling, Ill., publishes a pamphlet giving a large number of letters of recent date, from users of their machines, testifying to their efficiency and economy. They are used for every variety of work, from printing presses to grain elevators, and are designed to be perfectly safe, compact and trustworthy, while working with great economy. The engine uses gasoline direct from a tank, and has an automatic governor whereby only as much gasoline is used as required to do the work.

SCIENTIFIC AMERICAN BUILDING EDITION.

APRIL NUMBER.—(No. 66.)

TABLE OF CONTENTS.

1. Plate in colors showing a cottage on Lombard Avenue, Chicago. Two floor plans, perspective elevation, etc. Estimated cost $2,800.
2. Colored plate of an attractive residence erected at Bridgeport, Conn. Cost $6,900 complete. Floor plans and two additional photographic elevations.
3. A cottage costing $2,700 complete, erected for Mr. R. H. Keller, at Rutherford, N. J. Three elevations and plans. Mr. U. D. Peck, architect, Rutherford, N. J.
4. Photographic view and two floor plans of a cottage at Austin, Chicago. Estimated cost $3,300.
5. A row of new dwellings on West 82d Street, New York. Cost of each house $20,000 complete. Messrs. Berg & Clark, New York, architects.
6. Cottage recently erected at New Haven, Conn. Cost $6,850 complete. Floor plans and photographic perspective elevation.
7. An attractive dwelling erected at Yonkers, New York, at a cost of $6,000. Photographic elevation and floor plans.
8. Two photographic views of the beautiful residence of Mr. Noakes, on Riverside Park, New York City, a colored view of which appeared in the March issue.
9. Sketch of a sixteen story office building to be erected at Chicago. Cost $750,000.
10. Sketch of a water-cooled building. One of the novelties proposed and patented for the World's Fair at Chicago.
11. Recently erected English houses. Plans and perspective views.
12. Miscellaneous contents: How to catch contracts.—Toggle bolt for electrical and other fixtures, illustrated.—Composition for retarding the setting of plaster.—Quarrying marble.—The education of customers.—Iron and steel for building purposes.—An improved sanitary earth closet, illustrated.—Stamped metal ceilings, illustrated.—The Plaxton hot water heater, illustrated.—A hot water heater for soft coal, illustrated.—An improved woodworking machine, illustrated.—An improved casing for steam pipes, illustrated.

The Scientific American Architects and Builders Edition is issued monthly. $2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming, practically, a large and splendid MAGAZINE OF ARCHITECTURE, richly adorned with elegant plates in colors and with fine engravings, illustrating the most interesting examples of Modern Architectural Construction and allied subjects.

The Fullness, Richness, Cheapness, and Convenience of this work have won for it the LARGEST CIRCULATION of any Architectural publication in the world. Sold by all newsdealers.

MUNN & CO., PUBLISHERS,
361 Broadway, New York.

© 1891 SCIENTIFIC AMERICAN, INC.

Business and Personal.

The charge for Insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

For Sale—New and second hand iron-working machinery. Prompt delivery. W. P. Davis, Rochester, N.Y.

Presses & Dies. Ferracute Mach. Co., Bridgeton, N. J.

Barrel, Keg, and Hogshead Machinery. See adv. p. 189.

For best hoisting engine. J. S. Mundy, Newark, N. J.

Consulting engineer, mechanical drawing and designing. H. S. De Forest, 126A Liberty St., New York.

Best Ice and Refrigerating Machines made by David Boyle, Chicago, Ill. 155 machines in satisfactory use.

The Improved Hydraulic Jacks, Punches, and Tube Expanders. R. Dudgeon, 24 Columbia St., New York.

Engineers, firemen, machinists, send for circular of "Zwicker's Instructor." Geo. A. Zeller, St. Louis, Mo.

Screw machines, milling machines, and drill presses. The Garvin Mach. Co., Laight and Canal Sts., New York.

Beach's Improved Pat. Thread Cutting and Diamond Point Lathe Tool. Billings & Spencer Co., Hartford, Ct.

"How to Keep Boilers Clean." Send your address for free 96 p. book. Jas. C. Hotchkiss, 120 Liberty St., N. Y.

Split Pulleys at low prices, and of same strength and appearance as Whole Pulleys. Yocom & Son's Shafting Works, Drinker St., Philadelphia, Pa.

Guild & Garrison, Brooklyn, N. Y., manufacture steam pumps, vacuum pumps, vacuum apparatus, air pumps, acid blowers, filter press pumps, etc.

For low prices on Iron Pipe, Valves, Gates, Fittings, Iron and Brass Castings, and Plumbers' Supplies, write A. & W. S. Carr Co., 138 and 140 Centre St., New York.

The best book for electricians and beginners in electricity is "Experimental Science," by Geo. M. Hopkins. By mail, $4; Munn & Co., publishers, 361 Broadway, N. Y.

☞ Send for new and complete catalogue of Scientific and other Books for sale by Munn & Co., 361 Broadway, New York. Free on application.

Notes & Queries

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters, or no attention will be paid thereto. This is for our information and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(2976) A. C. asks: 1. Is an iron casting containing from 40 to 60 per cent of steel (or *vice versa*) of any commercial value as scrap? A. Yes. 2. Is it possible to decarbonize foundry irons by the Bessemer or any other process? If not, why? A. Yes; but they may not be well adapted for it, as not being pure enough, etc. 3. Why will steel scrap produce slag in a cupola and not in a covered crucible? A. In the cupola it is mixed with the ashes of the coal, which have to be slagged off, and it also needs slag to protect it from oxidation. In a covered crucible there is no impurity to be disposed of, and the steel is protected from oxidation. 4. In the manufacture of steel car wheels are the wheels cast from new steel, made in a converter? A. Casting direct from a converter has had very little success hitherto, on account of blowholes in the metal. 5. Is not the presence of blowholes in steel castings due more to the lack of pressure on the castings rather than to impurities in the metal? A. Blowholes are due to the low degree of fluidity of melted steel, and only to a limited extent to impurities. 6. What work is there on the manufacture of steel castings that you could recommend as being thoroughly up to the times? A. We highly recommend our SUPPLEMENT, No. 692, as well as many others to be found indexed in our new catalogue of SUPPLEMENTS. Also Howe's "Metallurgy of Steel," $10 by mail.

(2977) J. N. H. asks: 1. In what ratio is the time in which no current is passing to the time in which a current is passing in an alternating current? A. The time when no current is passing is almost zero. As the current rises and falls, and changing in direction rises again, the zero phase is indefinitely short in duration. The full discussion is quite complicated. 2. How can the lines of force about a certain magnet be calculated? A. By determining the adhesion of an armature, or by determining the E. M. F. produced by cutting the lines with a coil of given size, or by producing the lines and determining the E. M. F. produced in a coil of known size. 3. What is meant by the "torque" of an armature? A. The turning moment or couple, the product of the pull upon the armature by its effective radius tending to produce rotation. 4. What is a "cushion tire" on a bicycle? A. A hollow tire, giving greater extent of cushioning than the ordinary solid rubber tire.

(2978) C. H. asks: 1. What kind of battery would be most satisfactory and economical to run a motor to furnish ¼ horse power? A. Probably a Bunsen battery is the best for your purpose. You will find it a troublesome and expensive power. 2. How many cells would be required A. Enough to give 373 watts through zero external resistance, say 24 one quart cells. 3. How long would they furnish the required current at one charging? A. With ordinary use they will work for 50 or 60 hours with one full charge and an additional renewal of the bichromate solution. 4. What makes the bones of canned salmon so soft and brittle? A. The canning process, and action of the ingredients.

(2979) N. E. C. asks: What is the difference between air pressure at sea level and one, two, three, four and five thousand feet elevation respectively? And, what the difference in the volume of air at sea level and the above elevations? A. Taking the height at sea level as 30 inches, at 5,000 feet it is 24·773: at 10,000 feet, 20·459; at 15,000 feet, 16·896; at 3 miles, 16·361; at 6 miles, 8·923; at 9 miles, 4·866; at 15 miles, 1·448. As a rough approximation, allow one inch to one thousand feet. The volume of the air is in inverse ratio to the height of the barometer.

(2980) A. F. asks (1) if there is anything he can put on boots and shoes to make them waterproof? A. Beef tallow 4 ounces, resin 1 ounce, beeswax 1 ounce, melt together and add an equal quantity of neat's foot oil. Rub in while warming the shoe at a fire. 2. How can I take spots out of clothes, black worsted. It is a lightish spot, and I think it is grease. A. Use benzine, applying in a ring around the spot and finally to the spot itself. 3. How can I make cloth waterproof? A. Melt in paraffin wax with a hot iron. 4. I have a scar on my chin; how can I take it off? A. It is probably impossible to remove completely; consult a physician.

(2981) H. A. S. asks what the boiling point is for oils of spruce (*Abies nigra*) and tamarack (*Larix Americana*). A. The specific gravity of these oils varies from 0·850 to 0·880; they boil from 300° to 320° Fah., are very slightly soluble in water, sparingly in alcohol, readily in ether.

(2982) M. F. asks how to transfer lithographs to glass. A. Varnish the glass with dammar varnish or Canada balsam. When dry, soak the picture in water for some hours. When the glass is nearly dry, smoothly press the wet picture upon it, being careful to exclude all air bubbles. When all is dry, rub off the paper with the wet finger, dry, and revarnish.

TO INVENTORS.

An experience of forty years, and the preparation of more than one hundred thousand applications for patents at home and abroad, enable us to understand the laws and practice on both continents, and to possess unequaled facilities for procuring patents everywhere. A synopsis of the patent laws of the United States and all foreign countries may be had on application, and persons contemplating the securing of patents, either at home or abroad, are invited to write to this office for prices, which are low, in accordance with the times and our extensive facilities for conducting the business. Address MUNN & CO., office SCIENTIFIC AMERICAN, 361 Broadway, New York.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Granted

April 14, 1891.

AND EACH BEARING THAT DATE.

[See note at end of list about copies of these patents.]

Adjustable bracket, Nacke & Brinkmann 450,250
Alarm. See Burglar alarm. Fire alarm.
Animal trap, Murphy & Lennon 450,471
Animal trap, F. Warner 450,545
Annunciator, heat, A. Reinemann 450,425
Arm, artificial, T. Sparham 450,476
Armature, L. C. Atwood 450,552
Automatic lubricator, C. A. Pierce 450,421
Axle, car, L. Hall, Jr. 450,230
Axle lubricator, C. W. Brewer 450,135
Axle nut, vehicle, J. Hansen 450,311
Baby jumper, R. Billeaux 450,394
Badge, campaign, H. Phillips 450,524
Baling press, W. H. Howard 450,585
Baling press, J. M. Sanders 450,301
Banjo, C. A. Woodhull 450,442
Bar. See Car draw bar.
Barrel hooping machine, W. H. Potter 450,190
Barrel washing machine, M. Gottfried 450,149
Bather's appliance, F. W. Ostrom 450,318
Batteries, porous cell for galvanic, W. Burnley 450,354
Battery. See Galvanic battery.
Bedstead, wardrobe, N. G. Augier 450,600
Bell, W. A. Luttgen 450,169
Bell and indicator, electric call, W. Cox 450,558
Bell, door, Allen & Goulden 450,347
Bin. See Coal or grain bin.
Blacking case, J. M. Wheeler 450,440
Blind pulley, Venetian, J. G. Wilson 450,392
Blind, window, G. W. Morstatt 450,316
Board. See Ironing board.
Bobbin or spool, J. L. Cheney 450,218
Boiler cleaning compound, E. J. Hoffman 450,232
Bolting machine, O. Esche 450,310
Book and tally sheet, poll, H. M. Geiger 450,582
Books, etc., apparatus for marbleizing or ornamenting, Zichtl & Brecht 450,307
Boring and mortising implement, C. Reed 450,338
Bottle stopper, W. P. Bonwick 450,479
Box. See Cock box. Folding box. Letter box. Paper box. Signal box. Stuffing box.
Bracket. See Adjustable bracket.
Brake. See Car brake. Locomotive driver brake.
Brick or tile machine, J. C. Titus 450,201
Bridge wall, tubular, J. R. Walsh 450,268
Brush, blacking, R. L. Stevens 450,500
Buckets, soap dish and brush holder for scrub, C. A. Inglis 450,462
Buckle, D. L. Smith 450,432
Bung wrench, J. Smith 450,381
Burglar alarm, C. R. Canterbury 450,282
Butter extractor, centrifugal, A. Wahlin 450,391
Butter, manufacturing, G. H. Hamrick 450,459
Butter tub, G. Smith 450,261
Button, F. E. Williams 450,273
Button, loop, G. Heuser 450,510
Cabinet for holding time cards, etc., U. M. White 450,271
Cabinet, office, J. W. See 450,196
Cable covering machine, J. D. Bishop 450,131
Cable covering press, C. H. Matchett 450,175
Cake turner, R. W. Stephens 450,536
Camera, Blair & Crowell 450,214
Can capping machine, J. C. Winters 450,276
Can filling apparatus, Many & Harrison 450,467
Candle holder, M. V. Woncher 450,277
Cane and table, combined, O. N. Kuhl 450,603
Car brake, automatic, A. J. Rosentreter 450,300
Car, cattle, F. E. Canda 450,504
Car coupling, J. F. Angerstein 450,348
Car coupling, T. E. Askew 450,129
Car coupling, R. Chandler 450,217
Car coupling, C. E. C. Edey 450,578
Car coupling, J. Green 450,356
Car coupling, J. E. Kauffelt 450,238
Car coupling, Murphy & McCarthy 450,180
Car coupling, Thomas & Littlejohn 450,537
Car coupling, J. Simms 450,539
Car door, freight or grain, G. C. Dougherty 450,559
Car door, grain, C. A. Schroyer 450,430
Car draw bar, J. M. Maxwell 450,247
Car, electric motor, F. A. Pocock 450,189
Car, stock, G. D. Burton 450,158
Car, vestibule, H. Tanner 450,343
Cars, fender or safety attachment for electric or other, D. Hines 450,460
Cars, safety gate for street, F. C. Cash 450,556
Cars, switch device for street, J. Young 450,549
Carriage, child's folding, F. Bornemann 450,362
Cartridge filler, D. T. Llewellyn 450,465
Cartridge, paper shell, J. Gardner 450,454
Case. See Blacking case. Cigar case. Clock case. Shipping case.
Cash drawer and recorder, P. Westphal 450,439
Cash register, H. Cook 450,365
Cash register and indicator, H. Cook 450,364
Cash register and indicater, Manko & Paine 450,416
Cattle guard, C. O. Davidson 450,450
Celling, metallic, J. R. Wilson 450,274
Chamfers, producing, J. L. Dalot 450,507
Chart holder, C. H. Congdon 450,284
Chimney thimble, C. F. Green 450,355
Cigar case, A. H. Hieatzman 450,312
Circuit closer, W. C. Johnston, Jr. 450,292
Clamp. See Jeweler's clamp.
Clasp. See Shoe clasp.
Cleaner. See Grain cleaner.
Clock case, H. S. Prentiss 450,528, 450,530
Coal or grain bin, W. Walker 450,267
Cock box, stop, E. P. & L. Capron 450,140
Coffee or tea pot, F. D. Wheelwright 450,208
Collar fastener, horse, J. Thielen 450,389
Comb. See Curry comb. Toilet comb.
Combination lock, S. K. Weymouth 450,207
Composition of matter, W. W. Dunnett 450,560
Compound engine, A. J. Pitkin 450,374
Copying press, L. Ehrlich 450,563
Corn crib and granary, portable, C. I. Cook *et al* 450,506
Corn crib, portable, Cook & Britton 450,505
Corn popper, H. B. Yaryan 450,279
Corner strap, M. E. McMaster 450,472
Cotton gins, roll box for, Fraser & Stewart 450,229
Cotton scraper and chopper, combined, C. C. Chappel 450,480
Coupling. See Car coupling. Hose coupling. Radiator coupling. Thill coupling. Vehicle reach coupling.
Crushing and pulverizing machine, W. H. Howland 450,488
Cultivator and thinner, cotton, L. Studer 450,303
Cultivator, garden, C. S. Norcross 450,523
Cultivator, harrow, and seeder, C. C. Hair 450,150
Curry comb, J. Du Shane 450,562
Curve scriber, W. Gardner 450,455
Cut out, multiple fuse, A. W. Jones 450,159
Cutter. See Metal cutter.
Deodorizing compound, F. Lintz 450,370
Desk, adjustable folding, J. H. Fry 450,580
Door check, H. A. J. Rieckert 450,496
Door hanger, C. W. Bullard 450,352
Door spring, Harvey & Root 450,486
Dress skirt gauge, C. H. Trott 450,265
Drill. See Grain drill. Seed drill.
Dry kiln for malting, J. Kam 450,237
Dumb waiter, T. Coldwell 450,283
Dust collector, C. W. Cooper 450,327
Dust collector, O. M. Morse 450,372
Dust collector, D. A. Ward 450,269
Egg poacher, J. P. Eustis 450,564
Electric cable holder, J. W. Marsh 450,589
Electric lighting, making filaments for, S. F. Van Choate 450,304
Electric machine, dynamo, W. F. Collins 450,219
Electric motor, pulsating current, C. J. Van Depoele 450,544
Electric motors, automatic switch for, F. E. Whipple 450,441
Electric signal R. H. Gruschow 450,458
Electric switch, Adam & Knapik 450,551
Electric wire connection, E. J. Gatley 450,581
Electric wire support, Lieb & Lavens 450,587
Electrical distribution, system of, C. J. Van Depoele 450,541
Electro magnetic reciprocating engine, C. J. Van Depoele 450,543
Electro-therapeutic apparatus, regulator for, J. H. Davis 450,577
Elevator, C. R. Pratt 450,252
Engine. See Compound engine. Electro magnetic reciprocating engine. Gas engine.
Engine operating mechanism, steam, S. H. Pitkin 450,526
Engines, machine for boring the cylinders of steam, G. H. Corliss 450,401
Engines, machine for finishing side flanges of cylinders of steam G. H. Corliss 450,399
Engines, machine for finishing the ends of cylinders of steam G. H. Corliss 450,398
Engines, treating the cylinders of steam, G. H. Corliss 450,397
Eraser, ink, W. H. Robinson 450,378
Exercising apparatus, neck, T. Peterson 450,188
Explosives, apparatus for making dope for, J. C. Schrader 450,591
Extractor. See Butter extractor.
Fan, rotary, R. Godeffroy 450,148
Fare registering apparatus, Depeker & Erhardt 450,602
Faucet, registering beer, J. A. Durnbaugh 450,561
Feed regulator and register W. C. Newman 450,298
Feed water purifier, H. Warden 450,437
Fence post, C. H. Gersch 450,385
Fence weaving machine, H. Haynes 450,573
Fertilizer distributer, Cook & Patric 450,308
Fertilizer distributer, J. R. McCord 450,598
Fertilizer, phosphatic, J. Reese 450,254, 450,255, 450,531
Filter, Davis & Riddell 450,223
Filter, H. Warden 450,204
Filter, water, Davis & Riddell 450,222
Filters, recarbonizer for, W. W. Whiddit 450,209
Fire alarm and telephone system, S. W. Ludlow 450,245, 450,466
Fire extinguisher, automatic, Kreitz & Rosenbusch 450,161
Fire extinguishing system, automatic, Knowles, Jr., & Young 450,413
Fire protector, W. F. Bean *et al* 450,595
Fire sprinkler, automatic, J. F. Byers 450,574
Fish harvester, R. Yoakum 450,306
Fish hook, J. M. Munn 450,317
Fish preserve dam, S. McElroy 450,490
Float, C. Frattini 450,408
Flower stand, folding, C. A. Gibford 450,146
Flushing tanks, siphon for, H. P. Cope 450,557
Folding box, S. L. Saunders 450,194
Fumigating compound, Morris & Chenevert 450,522
Furnace grate, Z. F. Bryant 450,351
Gauge. See Dress skirt gauge.
Galvanic battery, W. A. Crowdus 450,285
Game apparatus, E. S. Boynton 450,395
Gas engine, J. Fielding 450,406
Gate. See Railway gate. Swinging gate. Wire gate.
Gate, A. W. Graham 450,569
Gearing, frictional, G. W. Soule 450,302
Generator. See Steam generator.
Glove, catcher's, E. H. Decker 450,366
Governor for steam engines, shaft, C. B. Mohn 450,249
Governor, steam engine, J. Harrold 450,151
Grain binder, A. E. Woodhouse 450,346
Grain cleaner, F. M. Shaw 450,198
Grain drill, A. L. & D. L. Baughman 450,478
Grain meter, C. S. Beggs 450,213
Grate, W. E. Kelly 450,315
Grindstone attachment, M. Raymond 450,191
Grooving machine attachment, G. A. Kennedy 450,463
Guard. See Cattle guard. Snow guard.
Gun barrels, fastening device for, G. W. Cilley 450,448
Gun sight, W. L. Marble 450,469
Gun sight, adjustable, W. L. Marble 450,468
Gun tool, C. & C. E. Tomlinson 450,323
Gymnastic live ball, T. Peterson 450,185
Hame attachment, W. B. Abrams 450,550
Hanger. See Door hanger.
Harness, J. H. Bradshaw 450,134
Harvester attachment, J. K. Beehler 450,443
Harvester, corn, A. A. Lundy 450,371
Harvester, cotton, J. A. House 450,584
Harvester, stalk fodder, H. F. Longworth 450,244
Harvesters, tension device for self-binding, M. S. Brown 450,555
Hat blocking machine, W. H. Pittilla 450,422
Hat fastener, W. H. Thompson 450,538
Hitching device, F. Sweetland 450,382
Hoisting machine, J. L. Dean 450,143
Holder. See Candle holder. Chart holder. Electric cable holder. Paper holder. Tool and work holder. Umbrella holder.
Hook. See Fish hook.
Hook, H. H. McLean 450,181
Hops, apparatus for extracting, J. Schneider 450,534
Horses, foot rasp for, G. Tompkins 450,436
Horseshoe machine, J. E. Bucklin 450,97
Horseshoe making machine, Z. V. Purdy 450,375
Hose coupling, L. Ott 450,3
Hose nozzle and coupling, reversible, A. B. Foans 450,452
Hot air register attachment, J. Segal 450,322
Hub and axle, vehicle, I. M. Warner 450,438
Ice creeper, R. A. Camp 450,503
Ice freezing machine, C. C. Smith 450,199
Injector, J. Trix 450,202
Inkstand, fountain, C. W. Rohrkaste 450,497
Insulation of armatures for dynamo-electric machines, R. Eickemeyer 450,366
Insulator, Lieb & Lavens 450,294
Insulator, electric wire, D. A. Bertolette 450,384
Iron, stone, etc., composition for treating, G. B. Smith 450,388
Ironing board, J. F. White 450,210
Jeweler's clamp, E. N. Parker 450,474
Jeweler's stock, G. E. A. Knight 450,412
Key, H. E. Russell, Jr 450,340
Key fastener, J. Ford 450,407
Kettle and steamer, sectional odorless, C. S. Dunham 450,328
Kettle cover, O. E. Harmon 450,231
Kiln. See Dry kiln.
Knife sharpener, C. K. Bradford 450,215
Knitting machine, circular, J. H. Hinchliffe 450,291
Lamp, F. S. Dellenbaugh 450,508
Lamp extinguisher, A. G. Hovde 450,410
Lamp lighting mechanism, W. D. Doremus 450,483
Land roller, N. J. Johnson 450,514
Lantern, tubular, L. F. Betts 450,444
Latch, J. W. Hansen 450,290
Latch, H. E. Russell, Jr. 450,339
Latch stop, Burgess & Voight 450,353
Latch stop, T. Lyons 450,381
Lathes, drip pan for metal turning, C. M. Conradson 450,481
Leggin, E. Christensen 450,326
Letter box, A. T. Sinclaire 450,379
Letter box, house door, E. S. Dunavan 450,226
Level, spirit, H. Green 450,457
Lifter. See Plate or pie lifter.
Lighting apparatus, J. T. Scholte 450,429
Limb, artificial, F. W. Neubert 450,297
Liquids, clarifying, C. Liesenberg 450,243
Lock. See Combination lock. Nut lock. Time lock.
Lock, P. Crady 450,220
Lock, H. E. Russell, Jr. 450,341
Locomotive driver brake, W. L. Austin 450,212
Locomotives, traction device for, S. Runser 450,532
Loom shuttle, H. P. Briggs 450,554
Lubricator. See Automatic lubricator. Axle lubricator. Pulley lubricator.
Lubricator, G. C. Pyle 450,424
Mail pouch, P. Crosson 450,309
Mask, face, B. F. Lamb 450,515
Match making machine, C. J. Donneily 450,405
Measuring electric currents, instrument for, H. H. Cunynghame *et al* 450,221
Measuring vessel, C. W. Proctor 450,494
Measuring vessel, liquid, D. E. Wolff 450,383
Metal bending machine, R. Lavery 450,241
Metal cutter and punch, W. Smith 450,599
Metal flanging machine, R. Lavery 450,240
Metal plates, table for conveying and cooling, H. Aiken 450,360
Metal rods or bars, making rolled, Large & Thomas 450,330
Metal scouring machine, E. O. Goss 450,456
Meter. See Grain meter.
Meter, W. T. Fox 450,567
Mill. See Ore mill.
Motor. See Electric motor.
Mowing and reaping machine, E. Webster 450,546
Mower, lawn, C. A. Frayer 450,568
Mowing machines, cutting mechanism for, W. F. Sbuey 450,499
Musical instrument, mechanical, E. Schilling 450,257
Necktie fastener, J. Metz 450,248
Nippers, cutting, Marsh & Fisher 450,174
Nut lock, J. C. Richardson 450,377
Odometer, Reinhold & Slayton 450,380
Opera glasses, J. Green 450,409
Ore concentrator, Young & Parson 450,280
Ore mill, C. S. Jones 450,236
Ozone water, preparing, J. C. Dittrich 450,404
Packing, balanced slide valve, W. S. Rogers 450,209
Packing, metallic piston, N. Pflaum 450,493
Pail and lunch basket, combined dinner, W. Poyner 450,527
Pail making machine, H. J. Medbery 450,590
Paper box covering machine, M. F. Wilson 450,275
Paper box, re-enforced, S. T. Achor 450,211
Paper cutting machine, guillotine, L. U. Gill 450,147
Paper holder and cutter, roll, A. Loft 450,168
Paper, letter, A. R. Baker 450,130
Pen, drawing, C. T. Finlayson 450,227
Pen, fountain, L. A. Shattuck 450,197
Pencil sharpener, I. E. Tallman 450,433
Pendulum bob, supplemental, H. S. Prentiss 450,529
Phosphate, ammoniated, J. Reese 450,253
Photograph negatives, device for lifting, C. H. Buchwalter 450,447
Photographic cabinet, C. Quartley 450,475
Piano action, A. H. Hastings 450,572
Pipe. See Sewer pipe. Sheet metal pipe.
Plaster casts, making, L. Enricht 450,287, 450,288
Plater or pie lifter, D. H. Sweeney 450,477
Plates, machine for cutting holes in, F. Schoff 450,428
Plow, G. W. Baker 450,281
Plow and potato digger, combined, W. E. Anderson 450,128
Poke, animal, J. F. Phillips 450,525
Pole, peg, T. Peterson 450,187
Police baton, C. Schwend 450,258
Post. See Fence post.
Pot. See Coffee or tea pot.
Potters' pins, machine for cutting, J. H. Mountford 450,179
Press. See Baling press. Cable covering press. Copying press. Printing press.
Printing cylinders, pantograph machine for tracing designs upon, J. Hope, Jr. 450,155
Printing press, J. M. Jones 450,368
Printing press, chromatic, J. C. Kellberg 450,369
Propeller, Marsh & Truss 450,417
Protector. See Fire protector.
Pruning implement, A. L. Schollhorn 450,342
Pulley lubricator, loose, H. L. Miller 450,519
Pump, G. A. Smith 450,535
Pump, E. Zickwolff 450,393
Pump, centrifugal force, Nicholas & Turner 450,491
Pump, double-acting suction and force, A. J. Hopkins 450,461
Pump, surf power, H. E. Thomas 450,434
Pumps, apparatus for cooling and lubricating the working parts of, C. G. Mayer 450,517
Pumps, valve for air, J. Herrold 450,152
Punch, paper A. B. Dick 450,224
Rack. See Safety rack.
Radiator coupling, Kittredge & Hogan 450,160
Radiator support, M. W. Baily 450,325
Rail and its fastening, girder, W. C. Wood 450,594
Rail connection with supplemental wire, C. A. Robinson 450,193
Railway, electric, R. M. Hunter 450,586
Railway gate, O. W. Johnson 450,235
Railway motor system, reciprocating electric, C. J. Van Depoele 450,542
Railway switch and signal, connected, M. Wuerpel 450,548
Railway switch appliance, J. J. Hill 450,329
Railway tie, E. Dietrich 450,145
Railway tie, metallic, I. L. Blakeslee 450,132
Railway tie, metallic, H. D. Dasher 450,601
Railway tie, metallic, E. Saunders 450,498
Railway trolley, electric, A. S. Hickley 450,153
Railway wire support, electric, C. A. Lieb 450,164
Railways, electric switch for electric, F. Mansfield 450,172, 450,173
Rat trap, T. Merrell 450,176
Refrigerating valve and regulator, Cox & Brockington 450,575
Register. See Cash register.
Regulator. See Feed regulator.
Rheotome, G. E. Pragnell 450,319
Roller. See Land roller.
Rule, telescopic, J. A. Cook 450,141
Safety rack, McIlhenny & Davison 450,419
Sand moulding machine, T. Mistelski 450,521
Sandpapering and friezing machine, combined, L. E. Paiue 450,337
Sash fastener, J. Wander 450,344
Savings bank, pocket, F. H. Brown 450,216
Sawsmithing machine, N. W. Mortorff 450,178
Scaffold support, adjustable, J. J. Hammer 450,570
Screen. See Window screen.
Screw beading machine, Southard & Smith 450,262
Seed drill, N. J. Johnson 450,513
Sewer pipe making machine, T. C. Hargrave 450,583
Sewing machine, A. S. Dinsmore 450,225
Shafts, vehicles, H. H. Lockwood 450,167
Sheaf gatherer, O. P. & M. T. Brinker 450,136
Sheet metal pipe, Davidson & Flender 450,142
Shelving, J. Gottfried 450,289
Ship, D. Bruce, Jr. 450,350
Shipping case, E. M. Thompson 450,435
Shoe, F. D. Smith 450,200
Shoe clasp, J. J. Unbehend 450,593
Shoe fastening, G. S. Webber 450,205
Shovel, D. A. Daly 450,449
Signal. See Electric signal.
Signal box, non-interference, W. H. Kirnan 450,239
Signal system, light, Noyes & Eaton 450,182
Signaling apparatus, train, H. R. Mason ..... 450,333 to 450,335
Skelp mills, etc., feeding device for, T. J. Price 450,423
Slate picking mechanism, E. B. Coxe 450,482
Snow guard, T. O'Gara 450,251
Snow plow, rotary, J. W. Haughawout 450,487
Solder rings, machine for cutting and forming sheet, J. G. Hodgson 450,313
Sole edge trimming machines, belt tightener for, W. Lahey 450,387
Sounds, electrical apparatus for reproducing, J. E. Roulez 450,426
Spectacles or eyeglasses, rimless, J. G. Missimer 450,177
Spring. See Door spring. Watch case spring.
Sprinkler. See Fire sprinkler.
Spur, D. Hutt 450,512
Stalk stripper, P. G. Bible 450,445
Stand. See Flower stand.
Starch, continuous automatic machine for the manufacture of, J. A. Ostenberg 450,492
Steam generator or evaporator, G. W. Baird 450,361
Steam trap, J. H. Fogarty 450,453
Steam trap, Leith & Hampton 450,415
Stilts, L. C. Johnson 450,357
Stopper. See Bottle stopper.
Stove, gas, W. S. Wright 450,278
Stove or lamp, oil, W. H. Wilder 450,547
Strap. See Corner strap.
Stuffing box, C. G. Mayer 450,518
Surgical instrument, C. H. Truax 450,266
Swinging gate, C. Z. Husel 450,233
Switch. See Electric switch. Railway switch.
Tack blank, staple, W. I. Ludlow 450,246
Telegraph, printing, P. H. Fisk 450,228
Telegraph relay, R. O. Wicks 450,272

© 1891 SCIENTIFIC AMERICAN, INC.

Telephone support, receiving, W. N. Marcus..... 450,359
Telephones, auxiliary mouth piece for, W. N. Marcus..... 450,358
Tentering or drying machines, automatic stop motion device for, L. Hollingworth..... 450,511
Thermostat, W. F. Singer..... 450,260
Thill coupling, W. C. Moler..... 450,418
Thrashing machine conveyer, T. F. Phipps..... 450,420
Thrashing machines, grain elevating apparatus for, E. H. Reynolds..... 450,192
Tie. See Railway tie.
Tie plate and rail clip, combination, C. C. Wrenshall..... 450,305
Tiling, preparing a continuous and solid, L. Enricht..... 450,286
Time call, electric, R. Varley, Jr..... 450,390
Time lock, P. F. King..... 450,293
Tobacco prize, J. H. Crow..... 450,576
Toilet comb, E. Lawson..... 450,162
Tool and holder, combination, Buck & Konigslow 450,596
Tool and work holder, eccentric, A. Johnson..... 450,234
Toy, A. Pugsley..... 450,495
Toy animal, G. Scheler..... 450,195
Toy detonator, H. H. Wesler..... 450,345
Toy parachute, W. F. Fleharty..... 450,565
Traction wheel, G. R. Duval..... 450,484
Transporting receptacle, Rogers & Hofman, 450,320, 450,321
Trap. See Animal trap. Rat trap. Steam trap.
Trolley guide, W. E. Jackson, Jr..... 450,489
Trolley device, A. Palmros..... 450,184
Trolley wire support, C. A. Lieb..... 450,242
Trolley wires, non-sparking clamp for, C. A. Lieb. 450,163
Trough. See Watering trough.
Truck, car, M. G. Hubbard..... 450,156, 450,157
Truck, car, C. W. Hunt..... 450,386
Trunk, J. Schmadel..... 450,533
Trunks, combined caster and spring corner protector for, S. S. Arnold..... 450,349
Truss, S. R. Nye..... 450,183
Tub. See Butter tub.
Tubing, socket tip for flexible, A. Caldwell..... 450,139
Twisting machine, A. R. Bullock..... 450,137
Typewriting machine, J. W. Schuckers (r)..... 11,156
Typewriting machine, J. H. Schulte..... 450,592
Typewriting machine, Yost & Merritt..... 450,324
Typewriting machines, type cleaning attachment for, W. B. Northrop..... 450,473
Umbrella holder, J. C. Garrott..... 450,485
Valve, F. J. Ferrell..... 450,451
Valve, balanced slide, H. Moon..... 450,470
Valve boxes of cylinders of steam engines, machine for boring the, G. H. Corliss..... 450,402
Valve boxes of steam engine cylinders, machine for finishing the ends of, G. H. Corliss..... 450,400
Valve boxes of steam engines, machine for fitting the exhaust, G. H. Corliss..... 450,403
Valve, filter manipulating, J. A. Bowden..... 450,133
Valve for air brakes, brake, H. R. Mason..... 450,332
Valve, straight-way, E. Lunkenheimer..... 450,558
Vaporized solvents, recovering, Whiting & Lawrence..... 450,501
Varnish, E. N. Todd..... 450,264
Vaulting horse, T. Peterson..... 450,186
Vehicle reach coupling, J. T. Livingston..... 450,295
Vehicle seat back, T. S. Brown..... 450,446
Vehicle spring gear, F. Coleman..... 450,363
Vehicle, two-wheeled, D. N. Kratzer..... 450,414
Vehicle, two-wheeled, H. H. Lockwood..... 450,166
Vehicle wheel, P. Dennau, Sr..... 450,144
Ventilator. See Window ventilator.
Vending apparatus, coin-actuated, M. B. Mills.... 450,336
Violin tail piece and chin rest, C. G. D. Watkins.. 450,270
Warp beamer, R. Simon..... 450,259
Wagon top, J. James..... 450,158
Warping machines, cut marker and stop motion for, C. Denn..... 450,509
Washing fluid, J. H. Seeberger..... 450,431
Washing machine, J. A. Harris..... 450,571
Washing machine, J. L. Le Beau..... 450,464
Water closets, automatic flushing device for, R. M. Reilly..... 450,376
Watering trough, stock, W. L. Magee..... 450,170
Watch case spring, J. H. Fleming..... 450,566
Watchmaker's punch, U. D. Miner..... 450,520
Watchmaker's staking tool, G. Sylvia..... 450,263
Watch pendant, F. G. Faxon..... 450,579
Watches, means for recovering lost or stolen, J. W. Schell..... 450,427
Wells, device for removing broken piston rods from, E. R. Bristol..... 450,502
Wheel. See Traction wheel. Vehicle wheel. Wind wheel.
Wheel, J. Trusty..... 450,540
Wind wheel, M. Irrgang..... 450,411
Windmill, E. C. Jewsbury..... 450,314
Window screen, C. F. J. Behr..... 450,553
Window ventilator, P. A. Sanguinetti..... 450,256
Wire cloth, J. W. Littlefield..... 450,165
Wire gate, F. Manning..... 450,171
Wire splicer and spiral spring winder, J. D. Van Dycke..... 450,203
Wires through conduits, mechanism for carrying, F. A. Wessel..... 450,206
Wood channeling and grooving machine, A. B. Cameron..... 450,396
Wood filler, Lynch & Crowley..... 450,296
Wrench. See Bung wrench.
Wrench, J. J. Hogan..... 450,154
Wrench, W. O. Lee..... 450,516

TRADE MARKS.

Ale and stout, mixed, W. Wirtz..... 19,351
Anodyne for infants, J. D. Groves..... 19,343
Antidotes for intoxicants, J. D. Groves..... 19,337
Bitters, kidney and liver, J. J. Spieker..... 19,348
Blood purifier, P. Fahrney..... 19,316, 19,317
Boots and shoes, machine sewed, Goodyear Shoe Machinery Company..... 19,350
Bread, L. Fleischmann..... 19,354
Chucks, Wescott Chuck Company..... 19,326
Coffee, artificial, Clark & Alden..... 19,329
Cordials and tonics, O. G. Sercombe..... 19,339
Cotton cloth, twilled, Sharpless Bros..... 19,360
Embalming fluid, Bay State Fluid Co..... 19,313
Fish, boneless, B. F. Allen & Co..... 19,311, 19,312
Forks, hoes, rakes, and hooks, Iowa Farming Tool Company..... 19,356
Gasoline, stove, National Refining Company..... 19,324
Gum, chewing, J. B. Bodle..... 19,341
Gum, chewing, S. Grove & Son..... 19,330
Hair dye, J. M. Scheffler..... 19,349
Inks, printing and lithographing, Fuchs & Lang.... 19,345
Jelly, guava, Barton & Dimick..... 19,314
Knit underwear, fancy, Yunds, Kyne & Kennedy.. 19,328
Laundry purposes, powder for, Magic Washing Powder Company..... 19,347
Leather, White Brothers &Co..... 19,327
Matches, parlor, L. Gustain..... 19,318
Medicated candy, Gold & Schrader..... 19,338
Oil, cotton seed, M. Liebman..... 19,331
Oil, illuminating, National Refining Company, 19,321, 19,322
Oil, lubricating, National Refining Company..... 19,323
Ointment, E. W. Walton..... 19,325
Paper bags, Hercules Paper Bag Co..... 19,344
Petroleum unguent, jelly, or oil for chapped face and hands, Doussan French Perfumery Company..... 19,342
Pills, capsules, tablets, and pastils, M. S. Greene... 19,355
Purgative compounds, liquid, A. B. Meurer..... 19,346
Remedy for coughs, C. E. Davis & Co..... 19,335
Remedy for dyspepsia. G. C. Frye..... 19,336
Remedy for scrofula and kindred diseases, J. C. Barnes & Co..... 19,333
Remedy, headache, C. Wright Medicine Company. 19,340
Salt, table, A. Kerr, Bro. & Co..... 19,320
Shoe tacks, Dunbar, Hobart & Co..... 19,315
Silk and wool fabrics, Sharpless Bros..... 19,361
Surgical appliances, R. A. Brown..... 19,334
Tea, Ceylon Planters Tea Company..... 19,353
Tea, mixed, W. Wilke..... 19,352
Thread, linen, Marshall & Company..... 19,358, 19,359
Toilet powders, T. P. Heidt..... 19,319
Trousers, Klee & Falk..... 19,357
Yeast, compressed, A. Woolner, Jr..... 19,332

DESIGNS.

Calendar mount, F. W. Perry..... 20,677
Handle for spoons, etc., W. B. Durgin..... 20,673, 20,674
Handle for spoons, etc., R. Harris..... 20,675
Handle for spoons, etc., A. N. & F. M. Wood..... 20,672
Lamp, H. F. Stahmer..... 20,670, 20,671
Paper weight or cigar holder, E. L. Moodie..... 20,676
Tire, India rubber, C. Coops..... 20,678
Wooden box, W. C. Estes..... 20,669

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print, issued since 1863, will be furnished from this office for 25 cents. In ordering please state the name and number of the patent desired, and remit to Munn & Co., 361 Broadway, New York.

Canadian Patents may now be obtained by the inventors for any of the inventions named in the foregoing list, provided they are simple, at a cost of $40 each. If complicated the cost will be a little more. For full instructions address Munn & Co., 361 Broadway, New York. Other foreign patents may also be obtained.

Advertisements.

Inside Page, each insertion - - - 75 cents a line.
Back Page, each insertion - - - $1.00 a line.

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

USE ADAMANT WALL PLASTER

It is **Hard, Dense, and Adhesive.** Does not *check or crack.* It is impervious to wind, water, and disease germs. It dries in a few hours. It can be applied in any kind of weather. It is in general use. Licenses granted for the mixing, using, and selling.

Address **ADAMANT MFG. CO.**
309 E. Genesee St., Syracuse, N. Y.

Patent Foot Power Machinery
Complete Outfits.

Wood or Metal workers without steam power, can successfully compete with the large shops, by using our New **LABOR SAVING Machinery,** latest and most improved for practical shop use, also for Industrial Schools, Home Training, etc. Catalogue free.
Seneca Falls Mfg. Co.
695 Water Street, Seneca Falls, N. Y.

THE PHONOGRAPH.—A DETAILED description of the new and improved form of the phonograph just brought out by Edison. With 8 engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **632.** Price 10 cents. To be had at this office and from all newsdealers.

The Sebastian-May Co.
Improved Screw Cutting
Foot & Power **LATHES**



Drill Presses, Chucks, Drills, Dogs, and Machinists' and Amateurs' Outfits. *Lathes on trial.* Catalogues mailed on application.
165 to 167 Highland Ave., SIDNEY, OHIO.

ADVERTISING SPECIALTIES! **Inventors** can sell us outright or have manufactured on royalty, inventions of novelty or utility that can be used for advertising. Correspondence invited. The Tuscarora Advertising Co., Coshocton, O.

BARNES PAT. FOOT POWER MACHINERY

I feel so highly pleased with your Velocipede Foot Power with seat, that I wish to add my testimony to its superiority. I did not expect to like it, but having used the Velocipede Power, I would have nothing else It so greatly lessens the fatigue of using foot power, in fact, it may be said to be almost without fatigue, and is a steadier motion. I only wish I had known of it sooner. Send for catalogue.
W. F. & J. BARNES CO., 999 Ruby St., Rockford, Ill.

THE PENNA. DIAMOND DRILL & MFG. CO.
BIRDSBORO, PA., Builders of High Class Steam Engines, Diamond Drilling and General Machinery. Flour Mill Rolls Ground and Grooved.

ARMSTRONG MAN'F'G. CO.

Our ADJUSTABLE STOCKS and DIES are universally acknowledged to be the **BEST!**
We also make all our Tools on the same principle, of the **BEST MATERIAL** and **WORKMANSHIP,** and always with a view of time and labor saving in their use.
BRIDGEPORT, CONN.

ELECTRO MOTOR, SIMPLE, HOW TO make. By G. M. Hopkins.—Description of a small electro motor devised and constructed with a view to assisting amateurs to make a motor which might be driven with advantage by a current derived from a battery, and which would have sufficient power to operate a foot lathe or any machine requiring not over one man power. With 11 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **641.** Price 10 cents. To be had at this office and from all newsdealers.

The Remington

has set the copy for writing machines for 15 years.
It is to-day the

Standard

and expects in the future, as it has in the past, to lead all others in adding improvements to what will always be the true model of a

Typewriter.

Wyckoff, Seamans & Benedict,
327 Broadway, New York.

LIST OF BOOKS ON
ELECTRICITY

Art of Electrolytic Separation of Metals. By G. Gore. Theoretical and practical. Fully illustrated. 8vo, cloth. London, 1890..... **$3.50**

Arithmetic of Electricity. By T. O'Conor Sloane, A.M., E.M., Ph.D. This work gives Electric Calculations in such a simple manner that it can be used by any one having a knowledge of Arithmetic. It treats of calculations for wiring, resistance in general, arrangement of batteries for different work, and is supplemented by the most practical series of tables ever published. It is absolutely indispensable to the practical electrician, as well as to the amateur. Fully illustrated. 1891.... **$1.00**

Bellhangers' Hand Book. With 97 illustrations. By F. B. Badt, author of "Dynamo Tenders' Hand Book." 1890..... **$1.00**

Dynamo Tenders' Hand Book. A practical guide for the operation of Electric Light Installations, giving, with the exclusion of all scientific terms, plain information on electrical terms, arrangement of power, theories of dynamos, diseases of dynamos, lamps, instruments, circuits, accumulators, safety regulations, construction of tools, and in addition several useful tables. By F. B. Badt. With 70 illustrations.... **$1.00**

Dynamos and Electric Motors, and all about them. By Edward Trevert. Illustrated. 1891 ... **.50**

Dynamo Electric Machines. Principles of, and Practical Directions for Designing and Constructing Dynamos, with an Appendix containing several articles on allied subjects, and a Table of Equivalents of Units of Measurement. By Carl Hering. N. Y., 1890.. **$2.50**

Dynamic Electricity and Magnetism. The Elements of a Complete Comprehensive Treatise on the Principles of Practical Electricity, in the author's well known, clear, unmathematical style. By Philip Atkinson, A.M., Ph.D., containing 405 pages. 120 illustrations. 12mo. 1891..... **$2.00**

Electricity. The A B C of. An elementary manual giving in simple language a general outline of the science. 108 pages, with 36 illustrations. Wm. H. Meadowcroft. 12mo, cloth, 1890..... **.50**

Electric Lighting. The Elements of Electric Lighting, including Electric Generation, Measurement, Storage, and Distribution. By Philip Atkinson, A.M., Ph.D., author of "Elements of Static Electricity." Contents: Electricity a Mode of Molecular Motion; Alternate Current Dynamos; Direct Current Dynamos; Electric Terms and Units; Electric Measurement; The Arc Lamp; The Incandescent Lamp; The Storage Battery; Electric Distribution, etc. Fourth edition. 260 pages. 104 illustrations. 1890..... **$1.50**
This is a very complete work, and should be in the hands of all who have to do with electric lighting apparatus of any kind whatever.

Electrical Influence Machines. By John Gray. A full account of their Historical Development and Modern Forms, with instructions for making them. Cloth, 237 pages, 89 illustrations..... **$1.75**

Electric Light Fitting. A Hand Book for Working Electrical Engineers, embodying Practical Notes on Installation Management. By John W. Urquhart, with numerous illustrations. London, 1890..... **$2.00**

Electric Batteries. Elementary Treatise on. From the French of Alfred Niaudet, translated by L. M. Fishback. Fifth edition. N. Y., 1890..... **$2.50**

Electricity in our Homes and Workshops. A practical Treatise on Auxiliary Electrical Apparatus. With numerous illustrations. Sydney F. Walker. 12mo, cloth. London, 1889..... **$1.50**

Electrical Instument Making for Amateurs. By S. R. Bottone. A practical hand-book. Cloth, 175 pages, 59 illustrations..... **.50**

Electrical Rules and Tables. A pocketbook of Electrical Rules and Tables for the use of Electricians and Engineers. Revised and enlarged. 498 pages. 32mo, Roan. Sixth edition. 1891..... **$2.50**

Electricity and Magnetism. Elementary Lessons in Electricity and Magnetism. By Sylvanus P. Thompson. 171 illustrations and 442 pages. 1891..... **$1.25**

Electrical Dictionary. A Dictionary of Electrical Words, Terms, and Phrases. By Edwin J. Houston, A.M., Electrician of the International Electrical Exhibition. 640 pages and 396 illustrations. 1889..... **$2.50**
The author has aimed to give a concise definition of the word, term, or phrase, and a brief statement of the science involved in the definition, and to insert when possible, a cut of the apparatus described or employed in connection with the word, term, or phrase defined.

Electrical Engineering. By W. Slingo and A. Brooker. A Practical Book for Electric Light Artisans and Students. This is a Comprehensive Treatise on the more Important Modern Applications of Electricity. 630 pages. 300 illustrations..... **$3.50**

Electro-Motors, How Made and How Used. By S. R. Bottone. A Handbook for Amateurs and Practical Men. Illustrated. This book was originally prepared chiefly as letters, in reply to queries addressed to the Author on the construction of electro-motors, on their many modifications, and on their mode of workings. 12mo, cloth. London, 1890..... **$1.20**

Electro-Deposition. A Practical Treatise on the Electrolysis of Gold, Silver, Copper, Nickel, and other Metals and Alloys, with descriptions of Voltaic Batteries, Magneto and Dynamo Electric Machines, Thermopiles, and of the Materials and Processes used in every department of the Art, and several chapters on Electro-metallurgy. By Alexander Watt, author of "Electro-metallurgy," "The Art of Soap Making," etc., etc. With numerous illustrations. Third edition. Revised, corrected, and enlarged. London, 1889..... **$3.50**

Electricity for Engineers. By Charles Desmond. A Clear and Comprehensive Treatise on the Principles, Construction and Operation of Dynamos, Motors, Lamps, Indicators, and Measuring Instruments, also a Full Explanation of the Electrical Terms used in the work. Illustrated by nearly 100 Engravings, in 1 Volume. 12mo, 255 pages. Price..... **$1.50**

Electric Bells and All About Them. By S. R. Bottone. A Practical Book for Practical Men. With more then 100 Illustrations. 12mo, cloth. Price reduced to..... **.50**

Electric Light Installations and the Management of Accumulators. A Practical Handbook by Sir David Salomons, Bart., M. A., Assoc. Inst. C. E., member of Council of the Society of Telegraph Engineers and Electricians, member of the American Institute of Electrical Engineers. Fifth edition, revised and enlarged. With 99 illustrations. 348 pages. 12mo, cloth..... **$1.50**

Experimental Science. By Geo. M. Hopkins. Natural Philosophy without a Teacher Simplified. Interesting Experiments in Every Branch of Physics. Descriptions of Simple and Efficient Apparatus, much of which may be Made at Home. Among Subjects treated are Electricity in all its Branches, Magnetism, Heat, Light, Photography, Microscopy, Optical Illusions, Mechanics, etc. A world of Valuable Information. A Source of Rational Amusement. A superb work for Young and Old. 740 pages, nearly 700 first-class engravings. Elegantly bound in cloth. 1891..... **$4.00**

Incandescent Wiring Handbook. With 35 illustrations and 5 tables by F. B. Badt, late First Lieut. Royal Prussian Artillery, and author of "Dynamo Tenders' Handbook," "Bell Hangers' Handbook." 1890..... **$1.00**

Lectures on the Electro-Magnet. By Sylvanus P. Thompson. Authorized American Edition. Just Published. Cloth. 1891..... **$1.00**

Practical Electric Bell Fitting. A Treatise on the Fitting-Up and Maintenance of Electric Bells, and all the necessary apparatus. By F. C. Allsop. With nearly 150 illustrations. 1889..... **$1.25**

Practical Electricity. A Laboratory and Lecture Course for First Year Students of Electrical Engineering based on the Practical Definitions of the Electrical Units. By W. E. Ayrton, F.R.S. Nearly 500 pages, and 180 illustrations. Third edition. 1890..... **$2.50**

Practical Electrics.—A Universal Hand-book on every-day electrical matters, including connections, alarms, batteries, bells, carbons, induction, intensity and resistance coils, dynamo-electric machines, fire risks, measuring, microphones, motors, phonographs, photophones, storage and telephones. Being the Electrical portion of the "Third Series of Workshop Receipts." 135 pages, 12mo, cloth. 1890..... **.75**

Telephone.—The Electric Telephone. By George B. Prescott. Second edition, revised and enlarged. 512 illustrations. 790 pages. 1890..... **$6.00**

☞ Any of the above books promptly sent by mail, postpaid, on receipt of the price, by

MUNN & CO.,
Publishers of the "Scientific American,"
361 Broadway, New York.
☞ *Send for our New and Complete Catalogue of Books, sent free to any address.*

ELECTRICAL!
Just out. Finely finished and Effective Desk Fan Motor. Continuous High Speed with Primary Battery. Motor and Battery, $10.00. Discount to Dealers.
NOVELTY ELECTRIC CO., 54 North 4th St., Phila., Pa.

OIL WELL SUPPLY CO.
91 & 92 WATER STREET,
Pittsburgh, Pa.,
Manufacturers of everything needed for
ARTESIAN WELLS
for either Gas, Oil, Water, or Mineral Tests, Boilers, Engines, Pipe, Cordage, Drilling Tools, etc. Illustrated catalogue, price lists and discount sheets on request.

STEREOTYPING; THE PLASTER AND Paper Processes.—Composition and preparation of the mould, the best alloys of metal and proper degree of heat, trimming and mending the plate, etc. A minute description of both processes, with numerous illustrations. A paper of great interest to every printer. By Thomas Bolas, F.C.S., F.I.C. SCIENTIFIC AMERICAN SUPPLEMENTS, **773** and **774.** 10 cents each.

ARTESIAN
Wells, Oil and Gas Wells, drilled by contract to any depth, from 50 to 3000 feet. We also manufacture and furnish everything required to drill and complete same. Portable Horse Power and Mounted Steam Drilling Machines for 100 to 600 ft. Send 6 cents for illustrated catalogue. **Pierce Artesian and Oil Well Supply Co.,** 80 Beaver Street, New York.

UNION MANUFACTURING & PLATING CO.
236-238-240 Carroll Ave., Chicago, Manufacturers of
METAL SPECIALTIES FOR INVENTORS.
ALL KINDS OF PLATING.
Estimates furnished. Correspondence invited.

A BOON TO THE DEAF!

Osgood's No. 1 Hearing Horn is the only instrument that will help the deaf. Made from best bell metal, and will last for years. Carried in the pocket and used in public without attracting attention. Price $5. Sent C. O. D. May be returned after 2 weeks' trial if not found satisfactory.
OSGOOD BROS., Cor. 7th St. & Broadway, Oakland, Cal.

CUSHMAN CHUCKS
Complete line for all uses shown in new illustrated catalogue, *free to all.*
Cushman Chuck Co., Hartford, Conn.

CLARK'S
Ventilating and Drying
FANS.



Light Running, Adjustable Blades, Self-Oiling Bearings. 24-page catalogue free.
Also Rubber Press Rolls for Wool and Yarn Washing and Dyeing Machines.
GEO. P. CLARK, Manuf.
Box L, **Windsor Locks, Ct.**

THE DAIMLER MOTOR
THE DAIMLER MOTOR CO.
is prepared to furnish **1, 2,** and **4 Horse Power**
GAS or PETROLEUM MOTORS
for all Industrial Purposes. *Fully illustrated catalogue and price list on application.* Motors in operation at Works, Steinway, Long Island City.
Office, 111 East 14th Street, New York City.

GATES ROCK & ORE BREAKER



Capacity up to 200 tons per hour.
Has produced more ballast, road metal, and broken more ore than all other Breakers combined.
Builders of High Grade Mining Machinery.
Send for Catalogues.
GATES IRON WORKS,
50 C So. Clinton St., Chicago
215 Franklin St., Boston, Mass.

OTTO GAS ENGINES
33,000 SOLD.
Engines and Pumps Combined.
For COAL GAS or GASOLINE.



SCHLEICHER, SCHUMM & CO.
PHILADELPHIA,
CHICAGO, NEW YORK.

ON GAS ENGINES.—A VALUABLE paper by E. Delamare-Debouteville, touching upon the history of gas motors in general, and describing in detail the "Simplex" engine invented by the author and Mr. Malandin. With 23 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. **715** and **716.** Price 10 cents each. To be had at this office and from all newsdealers.

EVERY USER OF MACHINERY SHOULD LEARN
How to Use Loose Pulleys.
Useful information on this subject is given in our "Catalogue No. 56." Sent free to any address.
VAN DUZEN & TIFT, Cincinnati, Ohio.
— MENTION THIS PAPER. —

EXCELLENT BLACK COPIES, only equaled by Lithography, of *anything written or drawn* with *any* Pen by the Patent **AUTOCOPYIST**
Specimens free.
Ten Eyck & Parker, 66 Pine Street, New York

GYMNASTICS FOR GIRLS.—AN INteresting account of the course of instruction given at the Berkeley Athletic Club for Ladies. With 18 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **753.** Price 10 cents. To be had at this office and from all newsdealers.

SCRAPER FOR CLEANING **STEAM BOILERS.**
This valuable invention, patented Nov. 4, 1890, for sale. For particulars, address Taylor Glover & Co., Box 875, Maryville, Mo.

Stored Energy
ACCUMULATORS for Electric Lighting and Street Car Propulsion.
THE ACCUMULATOR COMPANY,
44 Broadway, N. Y. City. 224 Carter St., Phila., Pa.

© 1891 SCIENTIFIC AMERICAN, INC.

Founded by Mathew Carey, 1785.

HENRY CAREY BAIRD & CO.
Industrial Publishers, Booksellers, and Importers,
810 Walnut St., Philadelphia, Pa., U. S. A.

☞ Our new and Revised Catalogue of Practical and Scientific Books, 86 pages, 8vo, and our other Catalogues and Circulars, the whole covering every branch of Science applied to the Arts, sent free and free of postage to any one in any part of the world who will furnish his address.

New Scientific Works

An Introduction to the Study of Metallurgy.—By W. C. Roberts-Austen, C.B., F.R.S., with numerous diagrams. Crown 8vo. Cloth, $2.50.

A Treatise on Electro-Metallurgy.—By Walter G. McMillan, F.I.C., F.C.S. With numerous illustrations. Crown 8vo. Cloth, $3.50.

A Text Book of Assaying.—With numerous diagrams. By C. and J. J. Beringer. 400 pages. Crown 8vo. Cloth, $3.25.

Aids in Practical Geology.—By Grenville A. J. Cole, F.G.S. With numerous illustrations. Crown 8vo. Cloth, $3.00.

The Design of Structures.—A Practical Treatise on the Building of Bridges, Roofs, etc. By S. Anglin. With numerous diagrams. Crown 8vo. Cloth, $4.50.

A Treatise on Mine Surveying.—By Bennett H. Brough. With numerous illustrations. 300 pages. 8vo. Cloth, $2.50.

*** For sale by all Booksellers, or will be sent, postpaid, on receipt of the price.*
New illustrated scientific catalogue sent free to any address

J. B. LIPPINCOTT COMPANY, Publishers,
715 and 717 Market St., Philadelphia.

GRAND PRIZE—PARIS EXPOSITION, 1889

THIN PANEL STOCK

In Whitewood, Walnut, etc.

Manufactured by the original "**Systéme Bartlett,**" received the Highest Award and only "Grand Prize" given to this industry. The only "Systéme" introduced into Europe and America that produces a perfectly sound cut board.

HENRY T. BARTLETT,
CABINET WOODS and VENEERS, | MAHOGANY SAW MILLS,
200 Lewis Street, New York.

PATENT STEAM-PIPE CASING

—FOR—

Underground Steam Pipes

Two staves removed to show lining between inside and outside staves.

A. WYCKOFF & SON,
116 East Chemung Place,
ELMIRA, N. Y.

The Builders' and Manufacturers' Exchange, Helena, Montana.

Correspondence solicited. Manufacturers and dealers please send catalogues. Address

WILL. R. JONES, *Secretary.*

TYPEWRITERS.

New or Second-Hand, any make, bought, sold and exchanged. Get our prices. Everything guaranteed. Machines rented anywhere. New catalogue describing all machines, free. NATIONAL TYPEWRITER EXCHANGE, 200 S. La Salle Street, CHICAGO, ILL.

FOREIGN BUSINESS!

Specialties in Machinery of all kinds wanted to place in the English, German, and French markets. Good English, German, and French Patents Bought. Our Representative will leave for England about May 15th.

Address **LARMACO,** BOSTON, MASS.

THE EAGLE

THE EASIEST RUNNING BICYCLE IN THE WORLD.

☞ Speed, Comfort and Safety.

AGENTS WANTED.

Large Illustrated Catalogue sent Free to any Address.

THE EAGLE BICYCLE MFG. CO.,
STAMFORD, CONN.

The United States Patent System. A history. Just published. Price 50c. Levin H. Campbell, Washington, D. C.

ALUMINUM. AN INTERESTING DESCRIPTION of the various methods of manufacturing this metal, chemical and electrolytic: with special reference to the Heroult method. With 6 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **753.** Price 10 cents. To be had at this office and from all newsdealers.

$10.00 to $50.00 per night. A light and profitable business. **Magic Lanterns and Views** of popular subjects. Catalogues on application. Part 1 Optical, 2 Mathematical, 3 Meteorological, 4 Magic Lanterns, etc. **L. MANASSE, 88 Madison Street, Chicago, Ill.**

PATENTS!

MESSRS. MUNN & CO., in connection with the publication of the SCIENTIFIC AMERICAN, continue to examine improvements, and to act as Solicitors of Patents for Inventors.

In this line of business they have had *forty-five years' experience*, and now have *unequaled facilities* for the preparation of Patent Drawings, Specifications, and the prosecution of Applications for Patents in the United States, Canada, and Foreign Countries. Messrs. Munn & Co. also attend to the preparation of Caveats, Copyrights for Books, Labels, Reissues, Assignments, and Reports on Infringements of Patents. All business intrusted to them is done with special care and promptness, on very reasonable terms.

A pamphlet sent free of charge, on application, containing full information about Patents and how to procure them; directions concerning Labels, Copyrights, Designs, Patents, Appeals, Reissues Infringements, Assignments, Rejected Cases. Hints on the Sale of Patents, etc.

We also send, *free of charge*, a Synopsis of Foreign Patent Laws, showing the cost and method of securing patents in all the principal countries of the world.

MUNN & CO., Solicitors of Patents,
361 Broadway, New York.

BRANCH OFFICES.—No. 622 and 624 F Street, Pacific Building, near 7th Street, Washington, D. C.

DEAFNESS & HEAD NOISES CURED by Peck's Invisible Tubular Ear Cushions. Whispers heard. Successful when all remedies fail. Sold only by F. Hiscox, 853 B'way, N.Y. Write for book of proofs **FREE**

FIRE FELT.

THE NEW NON-CONDUCTING MATERIAL is a Flexible Felt **Made of Pure Asbestos,** in a finely divided fibrous state, indestructible by heat and unexcelled as a Non-Conductor. U. S. Navy tests show it to be superior to Hair Felt in Non-Conducting qualities. Made into sectional form for pipes and into sheets and rolls for large surfaces. Send for Samples.

Asbestos Boiler Coverings, Steam Packings, Asbestos Cloth, Asbestos Building Paper, etc.

THE CHALMERS-SPENCE CO., 59 and 61 Liberty St., New York.
BRANCHES:—Philadelphia, Chicago, Pittsburgh, Boston.

"Improvement the order of the age."

THE SMITH PREMIER TYPEWRITER

Important Improvements.
All the Essential Features greatly perfected.
The Most Durable in Alignment.
Easiest Running and Most Silent.
All type cleaned in 10 seconds without soiling the hands.
The Smith Premier Typewriter Co., Syracuse, N. Y., U. S. A.
Send for Catalogue.

SMALL ELECTRIC MOTOR FOR AMateurs.—By C. D. Parkhurst. Description in detail of a small and easily made motor powerful enough to drive a ten or twelve inch brass fan and to give a good breeze. With 15 figures drawn to a scale. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **767.** Price 10 cents. To be had at this office and from all newsdealers.

STEVENS PATENT IDEAL
COMBINED DIVIDER & CALIPER
No. 62. Price, per set, all nickeled..$4.00
Packed for transmission by mail.
Ideal Surface Gauges, Depth Gauges, Ideal and Leader Spring Dividers and Calipers, and Fine Machinists' Tools.
☞ *Illustrated catalogue free to all.*
J. STEVENS ARMS & TOOL CO.
P. O. Box 280, Chicopee Falls, Mass.

STEEL TYPE FOR TYPEWRITERS

Stencils, Steel Stamps, Rubber and Metal Type Wheels, Dies, etc.
Model and Experimental Work
Small Machinery, Novelties, etc., manufactured by special contract.
New York Stencil Wks., 100 Nassau St., N.Y

BLUE PRINT Paper, Superior Quality. **Photographic Supplies.** Send for catalogue.
T. H. McCOLLIN & CO., 1030 Arch Street, Philadelphia.

ICE-HOUSE AND COLD ROOM.—BY R. G. Hatfield. With directions for construction. Four engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, **59.** Price 10 cents. To be had at this office and of all newsdealers.

FOR RENT

In the best Natural Gas City in Indiana. Buildings with Heat, Light, and Power. Equipped with Automatic Sprinklers, Steam Heat, and Electric Light, suitable for light or heavy manufacturing. Address,

JAS. BOYCE, MUNCIE, IND.

It Stands At The Head
The Caligraph.
LIFE IS TOO SHORT TO WRITE THE OLD WAY
Address: The American Writing Machine Co., Hartford, Conn.; New York Office, 237 Broadway.

SEWING MACHINE MOTOR FOR AMAteurs.—By C. D. Parkhurst. Description of a very simple and effective motor, with laminated armature, of sufficient power to actuate a sewing machine. With 11 engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **759.** Price 10 cents. To be had at this office and from all newsdealers.

Burnham's New Improved Standard Turbine
Vertical or Horizontal. Yields a greater percentage of water used, either with full or part gate drawn, and is the simplest constructed and best finished wheel in the market. Can fill your order promptly. BURNHAM BROS., YORK, PA.

STEAM ENGINE, HOW TO MANAGE. By J. C. S.—A very practical paper on the subject. How to fire with wood and coal, how to manage the water supply, how to clean the engine, how to clean the supply pipe, how to gauge the pump, etc. With 12 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **747.** Price 10 cents. To be had at this office and from all newsdealers.

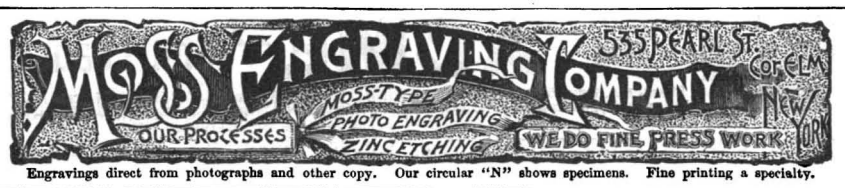

Engravings direct from photographs and other copy. Our circular "N" shows specimens. Fine printing a specialty.

HARRISON CONVEYOR!

For Handling Grain, Coal, Sand, Clay, Tan Bark, Cinders, Ores, Seeds, &c.
Send for Circulars. | BORDEN, SELLECK & CO., { Sole Manufrs., } Chicago, Ill.

ICE-HOUSE AND REFRIGERATOR. Directions and Dimensions for construction, with one illustration of cold house for preserving fruit from season to season. The air is kept dry and pure throughout the year at a temperature of from 34° to 36°. Contained in SCIENTIFIC AMERICAN SUPPLEMENT No. **116.** Price 10 cents. To be had at this office and of all newsdealers.

STENCILS, STEEL NAME STAMPS, STEEL Figures, Alphabets, Burning Brands, and Log Hammers, Printing Dies, Brass Signs, Door Plates and Seals.
BELLOWS & KONIGSLOW, 314 Seneca St., Cleveland, O.

INCOMBUSTIBLE MACHINERY

WIPING MATERIAL. Much cheaper and better than Cotton Waste. Consumers and dealers should write for particulars to
BORDEN & REMINGTON, Fall River, Mass., U. S. A.

FAMILY ICE MACHINE Ice, etc., in a few minutes. $10 & up. L. Dermigny, 126 W. 25th St., N. Y. *State Rights for sale.*

MORE FLEXIBLE 9 TIMES STRONGER THAN LEATHER
RUBBER COVERED WIRE BELTS
NOT AFFECTED BY WET DRY OR HEAT. SEND YOUR FULL NAME AND ADDRESS FOR PRICE LIST AND ILLUSTRATIONS TO
THE MIDGLEY WIRE BELT CO. BEAVER FALLS, PENNA. U.S.A.
GOOD AGENTS WANTED. NAME THIS PAPER.

TYPEWRITERS.

Largest like establishment in the world. First-class Second-hand Instruments at half new prices. Unprejudiced advice given on all makes. Machines sold on monthly payments. Any Instrument manufactured shipped, privilege to examine. EXCHANGING A SPECIALTY. Wholesale prices to dealers. Illustrated Catalogues Free.

TYPEWRITER HEADQUARTERS, { 70 Broadway, New York. 144 La Salle St., Chicago.

3 MONTHS ON TRIAL FOR 10C.
Bubier's Popular Electrician.
An Illustrated Monthly Journal for the Amateur, Experimenter, and Public.
BUBIER PUB. CO., Box 431, LYNN, MASS.

VOLNEY W. MASON & CO.,
FRICTION PULLEYS CLUTCHES and ELEVATORS
PROVIDENCE, R. I.

WHAT Uncle Sam and Aunt Columbia think, etc., of **WASHINGTON** and SEATTLE. Send stamp to Eshelman, Llewellyn & Co., Seattle, W.

A LIBRARY FOR $1.00

Five books in one. Worth its weight in gold to every mechanic. The very latest information for 20 different trades. This wonderful book contains 575 pages absolutely teeming with rules, tables, secret processes, and new information that cannot be had elsewhere for less than $25.00. The Modern Steam Engine—How to Read an Indicator—The Westinghouse Air Brake—Blacksmith's and Machinist's Tools—Practical Mathematics Simplified—Tin and Sheet Iron Worker's Manual—Carpenter's Manual—Points for Painters—Magnetism and Electricity—How to Get a Patent—A Mechanical Dictionary. Everything fully explained in one handsome volume and guaranteed to be absolutely correct. Send $1.00 for a copy bound in silk cloth, or $1.50 for Morocco binding. With each copy of the book we give free a complete working chart for setting gear teeth. The regular price of this chart is $1.50. **AGENTS WANTED.** Write for terms. **LAIRD & LEE. Publishers, 263 Wabash Avenue, Chicago, Ill.**

Useful Books!

Manufacturers, Agriculturists, Chemists, Engineers, Mechanics, Builders, men of leisure, and professional men, of all classes, need good books in the line of their respective callings. Our post office department permits the transmission of books through the mails at very small cost. A comprehensive catalogue of useful books by different authors, on more than fifty different subjects, has recently been published for free circulation at the office of this paper. Subjects classified with names of author. Persons desiring a copy, have only to ask for it, and it will be mailed to them. Address,

MUNN & CO., 361 Broadway, New York.

GOLD-SILVER-NICKEL PLATING A trade easily learned; costs little to start. I will furnish outfits and give work in part payment. Circulars free. Address F. LOWEY, Box 139, Brooklyn, N. Y.

PATENT FOR SALE. SELF-HEATING SAD IRON. Agents look here! 158 dozen sold in one County If you want a rapid seller with big profits, write to H. S. PEASE, 171 Elm Street, Cincinnati, Ohio.

WILL SELL United States, British, French, Austria-Hungarian, and Belgian patents on a valuable invention for $1,000. Address Box 243, North Collins, New York.

ICE and REFRIGERATING MACHINES

The Pictet Artificial Ice Company (Limited), Room 6, Coal & Iron Exchange, New York.

PROPOSALS.

PROPOSALS FOR MAIL-BAG CORD-FASTENERS AND FOR IRON AND STEEL, &c., FOR POST OFFICE DEPARTMENT.

POST OFFICE DEPARTMENT, WASHINGTON, D. C., February 28, 1891.—Sealed proposals will be received at this Department until noon, on Wednesday, the sixth day of May, 1891, for furnishing, according to contract, Mail-bag Cord-fasteners, Iron, Steel, Brass, Oils, and Waste. All proposals must be in accordance with the specifications, which can be obtained from the Second Assistant Postmaster General, Mail Equipment Division.
JOHN WANAMAKER, *Postmaster General.*

PROPOSALS FOR IMPROVEMENTS IN MAIL-BAGS, MAIL-CATCHERS AND MAIL-BAG LABEL-HOLDERS.

POST OFFICE DEPARTMENT, WASHINGTON, D. C., February 28, 1891.—Sealed proposals from patentees or their assignees for granting the use of patented improvements in the mode of opening and closing mail-bags of any kind, and in the construction of mail-bags, mail-catchers, and devices for labelling mail-bags, will be received at this Department until noon, on Wednesday, the second day of September, 1891. All proposals must be in accordance with the specifications, which can be obtained from the Second Assistant Postmaster General, Mail Equipment Division.
JOHN WANAMAKER, *Postmaster General.*

The New Book.

Experimental Science

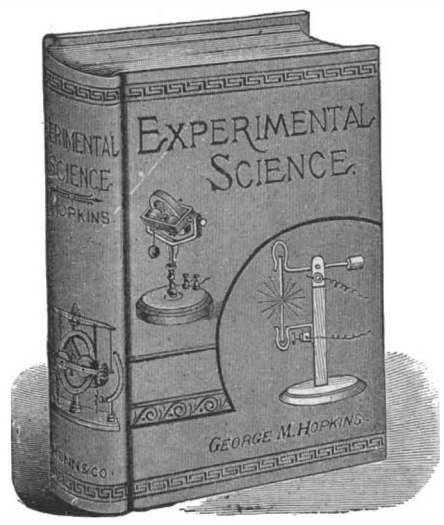

By GEO. M. HOPKINS.

740 Pages. Over 680 Illustrations.
PRICE, by mail, postpaid, $4.00

SEND FOR FULL ILLUSTRATED CIRCULAR AND TABLE OF CONTENTS.

This is a book full of interest and value for teachers, students, and others who desire to impart or obtain a practical knowledge of physics.

MUNN & CO., Publishers,
Office of The Scientific American
361 BROADWAY, NEW YORK.

What the Press says of "Experimental Science."

"Mr. Hopkins has rendered a valuable service to experimental physics."—*Evening Post.*

"The book is one of very practical character, and no one of a scientific turn of mind could fail to find in its pages a fund of valuable information."—*Electric Age.*

"The electrical chapters of the book are notably good, and the practical instruction given for building simple electrical machinery may be safely carried out by those—not a few—who like to make their own apparatus."—*Electrical World.*

"The author has avoided repeating the hackneyed illustrations which have been passed from one book to another so long, and, instead, offers a set of experiments which are largely of a novel character and very striking."—*Engineering and Mining Journal.*

"We commend it most heartily to all teachers."—*Normal Exponent.*

"It is a treat to read a book of this kind, that sets forth the principles of physics so fully, and without the use of mathematics."—*The Locomotive.*

"All teachers of science are aware that real knowledge is acquired best by the student making experiments for himself, and any one who points out how those experiments may be easily made is doing excellent work."—*English Mechanic and World of Science.*

"The work bears the stamp of a writer who writes nothing but with certainty of action and result, and of a teacher who imparts scientific information in an attractive and fascinating manner."—*American Engineer.*

"It should be found in every library."—*English Mechanic.*

"The book would be a most judicious holiday gift."—*Engineering and Mining Journal.*

"The portion of the book devoted to dynamic electricity covers over one hundred pages, and is extremely interesting and valuable."—*Brooklyn Standard Union.*

"Directions are given for demonstrating most of the laws of physics, with every-day tools and common appliances."—*American Photographer.*

"Many of the experiments are new to print, while some of the old, familiar ones appear in modified form and with simplified apparatus."—*Public Opinion.*

The Scientific American

PUBLICATIONS FOR 1891.

The prices of the different publications in the United States, Canada, and Mexico are as follows:

RATES BY MAIL.

The Scientific American (weekly one year	$3.00
The Scientific American Supplement (weekly), one year.	5.00
The Scientific American, Spanish Edition (monthly) one year.	3.00
The Scientific American, Architects and Builders Edition (monthly), one year.	2.50

COMBINED RATES.

The Scientific American and Supplement,	$7.00
The Scientific American and Architects and Builders Edition,	5.00
The Scientific American, Supplement, and Architects and Builders Edition,	9.00

Proportionate Rates for Six Months.

This includes postage, which we pay. Remit by postal or express money order, or draft to order of

MUNN & CO., 361 Broadway, New York.

DETECTIVE! WE WANT a MAN in every **locality** to act as **Private Detective** under our instructions. Send stamp for particulars. WASHINGTON DETECTIVE AGENCY, Box 787, Washington, Iowa.

WORKING MODELS & LIGHT MACHINERY. INVENTIONS DEVELOPED. Send for Model Circular. Jones Bros. E. Co., Cin'ti. O.

© 1891 SCIENTIFIC AMERICAN, INC.

Advertisements.

Inside Page, each insertion - - - - 75 cents a line
Back Page, each insertion - - - - $1.00 a line.

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

COMPLIMENTS OF THE TANITE CO.

Twenty years ago the advertisements of *The Tanite Co., of Stroudsburg, Pa.*, appeared weekly in these columns, and the push and enterprise of that Company soon stirred up an active interest in the economy of grinding processes and built up a new industry. To the pioneer work of the Tanite Co. is due the extension of this industry in all parts of the world and the increased demand for Solid Emery Wheels and Grinding Machines. Thus far the mechanical public has associated the Company's name only with these goods. The time has arrived when the Company's name is to be associated with another industry of equal importance. After many years' experience with Emery bought of all the Foreign and American makers, it began the manufacture of Emery for its own use. In this it succeeded so well that in March, 1890, it issued circulars offering Tanite Mills Emery to the public. The demand has grown rapidly and The Tanite Co. is now handling as much Emery as any concern in the world. Users who heretofore have only bought brands bearing some well known trade mark, or distinguished by some special shape or color, will do well to make a trial of *Tanite Mills Emery*. After using Emery for 22 years, and building up a world-wide reputation for its Tanite Wheels, it is not likely that the Company would offer Emery under its own name unless it was assured that it offered goods of quality equal to any.

SEND FOR THIS BOOK
FREE ON APPLICATION.
THE BABCOCK & WILCOX Co.
WATER TUBE
30 CORTLANDT ST. N.Y.
107 HOPE ST. GLASGOW, SCOTLAND.
STEAM BOILERS
MANUFACTORIES IN UNITED STATES, SCOTLAND, FRANCE, GERMANY & AUSTRIA.

Awarded the Grand Prize at late Paris Exposition.

THE COPYING PAD.—HOW TO MAKE and how to use; with an engraving. Practical directions how to prepare the gelatine pad, and also the aniline ink by which the copies are made; how to apply the written letter to the pad; how to take off copies of the letter. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, NO. 438. Price 10 cents. For sale at this office and by all newsdealers in all parts of the country.

VICTORS

MAKE THE PACE

OVERMAN WHEEL CO., MAKERS,
CHICOPEE FALLS, MASS.

BOSTON. WASHINGTON. DENVER. SAN FRANCISCO.

A. G. SPALDING & BROS.
SPECIAL AGENTS,
CHICAGO. NEW YORK. PHILADELPHIA.

ATMOSPHERIC DUST.—BY WILLIAM Marcet, F.R.S. An address delivered to the Royal Meteorological Society. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 755. Price 10 cents. To be had at this office and from all newsdealers.

NEW KODAKS



"You press the button, we do the rest."

Seven New Styles and Sizes

ALL LOADED WITH

Transparent Films.

For sale by all Photo. Stock Dealers.

THE EASTMAN COMPANY,

Send for Catalogue. *ROCHESTER, N. Y.*

Levels, Transits, Surveyors' Compasses, Pocket and Prismatic Compasses, Hand Levels, Angle Mirrors, Planimeters, Pantographs, Engineers' Slide Rules, Leveling Rods, Poles, Chains, etc.
Catalogue on application.

THE AMERICAN BELL TELEPHONE CO.

95 MILK ST., BOSTON, MASS.

This Company owns the Letters Patent granted to Alexander Graham Bell, March 7th, 1876, No. 174,465, and January 30th, 1877, No. 186,787.

The transmission of Speech by all known forms of Electric Speaking Telephones infringes the right secured to this Company by the above patents, and renders each individual user of telephones not furnished by it or its licensees responsible for such unlawful use, and all the consequences thereof, and liable to suit therefor.

MALLEABLE AND FINE GRAY IRON ALSO STEEL CASTINGS FROM SPECIAL PATTERNS
THOMAS D EVLIN & CO. FINE TINNING JAPANNING AND FINISHING
LEHIGH AVE & AMERICAN ST PHILA

$85 Lovell Diamond Safety $85

Diamond Frame, Steel Drop Forgings, Steel Tubing, Adjustable Ball Bearings to all Running Parts, including Pedals. Suspension Saddle. Finest material money can buy. Finished in enamel and nickel.

Strictly high grade in every particular. No better machine made at any price.

Bicycle Catalogue Free. Send six cents in stamps for our 100-page illustrated catalogue of Guns, Rifles, Revolvers, Sporting Goods of all kinds, etc.

JOHN P. LOVELL ARMS CO., 147 Washington Street, BOSTON, MASS.

STEREOTYPING.—A VALUABLE series of lectures by Thomas Bolas, discussing the most recent methods in this branch of typography. With 23 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. 773 and 774. Price 10 cents each. To be had at this office and from all newsdealers.

"COLUMBIAS"

HIGHEST GRADE ONLY

CATALOGUE FREE



POPE MFG. CO., 77 Franklin Street, BOSTON.
Branch Houses: 12 Warren St., NEW YORK, 291 Wabash Ave., CHICAGO. Factory, HARTFORD, CONN.

A LARGE MANUFACTURING CONCERN in Germany wants to manufacture some American articles in the Steel or Iron metal line. Address propositions to KNIFFLER MFG. CO., Room 507, 50 Euclid Avenue, Cleveland, Ohio.

H.W. JOHNS' ASBESTOS STEAM PACKING

Boiler Coverings, Millboard, Roofing, Building Felt, Liquid Paints, Etc.
DESCRIPTIVE PRICE LIST AND SAMPLES SENT FREE.
H. W. JOHNS MFG. CO., 87 Maiden Lane, N.Y.

ARTIFICIAL INCUBATION.—A DESCRIPTION of the French process of raising chickens. With 7 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 778. Price 10 cents. To be had at this office and from all newsdealers.



ELECTRIC PERCUSSION DRILLS

Marvin System of Percussion Tools.

Drill contains no commutator nor moving contacts.

All circuits are protected in closed metallic cases.

More economical, simpler, and more easily handled than steam or air drills.

Safe and reliable. Not affected by moisture, dampness, or dripping water.

Weight of drill, with tripod, about 400 pounds.

Speed of drilling in hard granite, 1 in. hole, 2 inches per minute.

Send for descriptive pamphlet and prices.

Edison General Electric Co.
Edison Building, Broad St., New York.

STAMPED CORRUGATED SHEETS

Insure Perfect Joints in Your Buildings. And when your joints are perfect, your buildings are Fire, Wind, and Water Proof.

THE CINCINNATI CORRUGATING CO.
Send for Catalogue B. **Piqua, Ohio.**

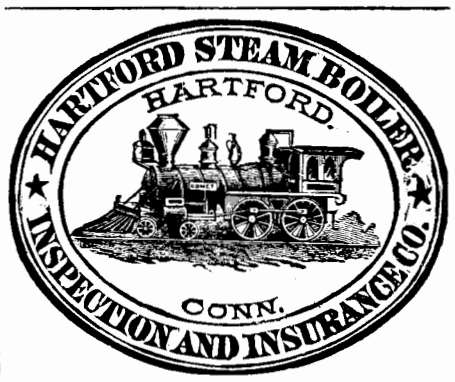



After being on the Market Five Years

The "ACME" Still Leads!

Sizes One, Two, Three, and Four Horse Power. Arranged for either NATURAL GAS or Kerosene Oil fire, as ordered. No extra insurance required on account of the oil fire. Send for catalogue giving full particulars and prices.

Acme Automatic Safety Engine—Stationary. Oil Tank.

ROCHESTER MACHINE TOOL WORKS, Brown's Race, ROCHESTER, N. Y

WORKING MODELS and Experimental Machinery, metal or wood, made to order by MASON & RAUCH, successors to J. F. Werner, 47 & 49 Centre Street, New York.

¾ to 50 H. P. **THE Motor of 19th Century**



Can be used *Any Place*, to do *Any Work*, and by *Any One*. No Boiler! No Fire! No Steam! No Ashes! No Gauges! No Engineer! A perfectly safe Motor for all places and purposes. *Cost of operation about one cent an hour to each indicated horse power.* For circulars, etc., address

Economy, Reliability, Simplicity, Safety. **CHARTER GAS ENGINE CO.** P. O. Box 148, Sterling, Ill.

KOCH'S DISCOVERIES.—A FULL ACCOUNT of Dr. Koch's remedy for tuberculosis, the method of using it, etc. With 9 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 782. Price 10 cents. To be had at this office and from all newsdealers.



Scientific Book Catalogue

RECENTLY PUBLISHED.

Our new catalogue containing over 100 pages, including works on more than fifty different subjects. Will be mailed free to any address on application.

MUNN & CO., Publishers Scientific American, **361 Broadway, New York.**

JAMES LEFFEL WATER WHEELS

ENGINES, and BOILERS.

JAMES LEFFEL & CO.

FARLO ST., SPRINGFIELD, OHIO.

110a Liberty Street **New York City.**

If you want the **SIMPLEST** and **BEST**

GATE VALVE

for low pressures (below 60 lbs.) whether for Steam, Gas, Water, Oils, or Thick Fluids, investigate the "Handy." It is more compact and costs much less than any other Gate Valve. Write for Catalogue.

The Lunkenheimer Brass Mfg. Co.
15-17 E. 8th St., Cincinnati, O.

THE PREMIER CAMERA

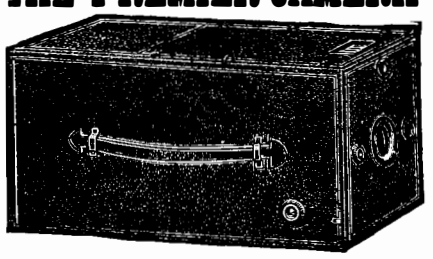

IS THE BEST IN MARKET.

Simple of Manipulation.
Plates or Films are used.
The Shutter is always set.

PRICE $18.00.

Send for Catalogue and copy of Modern Photography.

ROCHESTER OPTICAL COMPANY,
14 S. Water St., ROCHESTER, N. Y.

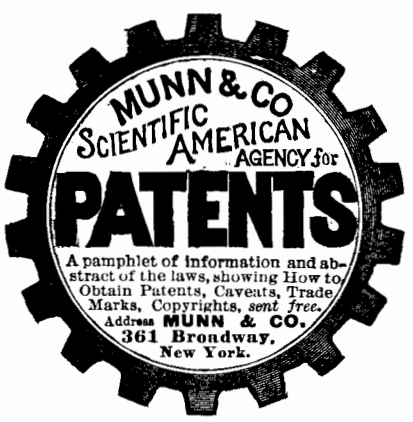
MUNN & CO
SCIENTIFIC AMERICAN
AGENCY for
PATENTS
A pamphlet of information and abstract of the laws, showing How to Obtain Patents, Caveats, Trade Marks, Copyrights, *sent free.*
Address MUNN & CO.
361 Broadway,
New York.

MONEY LOANED AT 2% By Uncle Sam on farms will make mortgages as fashionable as sin is. The **Maher & Grosh** cutlery is **hand-forged** from **razor-steel**, every blade tested and warranted. Look at knife shown here; cut is exact size, price is 65c.; blades equal any $3 razor; price for awhile is 48c.; 5 for $2, postpaid. Ladies' 2-blade pearl, 35c.; 7-in. steel shears, 60c. knife shown here and shears, $1, postpaid. Barber's hollow ground razor $1.25. Best strop ever made, 50c. Send for free list.

Maher & Grosh, 40 S Street, Toledo, O.

Otis Electric Elevator

—ALSO—

Manufacturers of the Standard Hydraulic Passenger and Freight, Steam and Belt

ELEVATORS,

Otis Brothers & Co., 38 Park Row, New York



SCIENTIFIC AMERICAN SUPPLEMENT. Any desired back number of the SCIENTIFIC AMERICAN SUPPLEMENT can be had at this office for 10 cents. Also to be had of newsdealers in all parts of the country.

THE GRAVES ELEVATORS.

PASSENGER & FREIGHT L.S. GRAVES & SON ROCHESTER N.Y.
NEW YORK, BOSTON, ST. LOUIS, DETROIT.

TO BUSINESS MEN

The value of the SCIENTIFIC AMERICAN as an advertising medium cannot be overestimated. Its circulation is many times greater than that of any similar journal now published. It goes into all the States and Territories, and is read in all the principal libraries and reading rooms of the world. A business man wants something more than to see his advertisement in a printed newspaper. He wants circulation. This he has when he advertises in the SCIENTIFIC AMERICAN. And do not let the advertising agent influence you to substitute some other paper for the SCIENTIFIC AMERICAN, when selecting a list of publications in which you decide it is for your interest to advertise. This is frequently done, for the reason that the agent gets a larger commission from the papers having a small circulation than is allowed on the SCIENTIFIC AMERICAN.

For rates see top of first column of this page, or address **MUNN & CO., Publishers, 361 Broadway, New York.**

MACHINE TOOLS

Engine Lathes, Planers, Shapers, Turret Lathes, etc. *Send for Catalogue.*
The Hendey Machine Co., Torrington, Conn.

NEW MAIL

New Grade, $100.

CUSHION TIRES and TANGENT SPOKES.

Handsomest and Best Diamond Safety.

Send for Catalogue and Second-Hand List.

Also Sole New England Agents for

LITTLE GIANT

PRICE, $35.00.

Only Boy's Safety with a Spring Fork, preventing injury to young riders from jar and vibration.

WM. READ & SONS, 107 Washington St. **BOSTON, MASS.**

THE

Scientific American

ESTABLISHED 1846.

The Most Popular Scientific Paper in the World

Only $3.00 a Year, Including Postage. Weekly 52 Numbers a Year.

This widely circulated and splendidly illustrated paper is published weekly. Every number contains sixteen pages of useful information and a large number of original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery, New Inventions, Novelties in Mechanics, Manufactures, Chemistry, Electricity, Telegraphy, Photography, Architecture, Agriculture, Horticulture, Natural History, etc. Complete list of patents each week.

Terms of Subscription.—One copy of the SCIENTIFIC AMERICAN will be sent for *one year*—52 numbers—postage prepaid, to any subscriber in the United States, Canada, or Mexico, on receipt of **three dollars** by the publishers; six months, $1.50; three months, $1.00.

Clubs.—Special rates for several names, and to Post Masters. Write for particulars.

The safest way to remit is by Postal Order, Draft, or Express Money Order. Money carefully placed inside of envelopes, securely sealed, and correctly addressed, seldom goes astray, but is at the sender's risk. Address all letters and make all orders, drafts, etc., payable to

MUNN & CO., 361 Broadway, New York.

—o—

THE

Scientific American Supplement

This is a separate and distinct publication from THE SCIENTIFIC AMERICAN, but is uniform therewith in size, every number containing sixteen large pages full of engravings, many of which are taken from foreign papers, and accompanied with translated descriptions. THE SCIENTIFIC AMERICAN SUPPLEMENT is published weekly, and includes a very wide range of contents. It presents the most recent papers by eminent writers in all the principal departments of Science and the Useful Arts, embracing Biology, Geology, Mineralogy, Natural History, Geography, Archæology, Astronomy, Chemistry Electricity, Light, Heat, Mechanical Engineering, Steam and Railway Engineering, Mining, Ship Building, Marine Engineering, Photography, Technology, Manufacturing Industries, Sanitary Engineering, Agriculture, Horticulture, Domestic Economy, Biography, Medicine, etc. A vast amount of fresh and valuable information obtainable in no other publication.

The most important Engineering Works, Mechanisms, and Manufactures at home and abroad are illustrated and described in the SUPPLEMENT.

Price for the SUPPLEMENT for the United States and Canada, $5.00 a year; or one copy of the SCIENTIFIC AMERICAN and one copy of the SUPPLEMENT, both mailed for one year for $7.00. Single copies, 10 cents. Address, and remit by postal order, express money order, or check,

MUNN & CO., 361 Broadway, New York.
Publishers SCIENTIFIC AMERICAN.

—o—

Building Edition.

THE SCIENTIFIC AMERICAN ARCHITECTS' AND BUILDERS' EDITION is issued monthly. $2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming a large and splendid Magazine of Architecture, richly adorned with *elegant plates in colors*, and with other fine engravings; illustrating the most interesting examples of modern architectural construction and allied subjects.

A special feature is the presentation in each number of a variety of the latest and best plans for private residences, city and country, including those of very moderate cost as well as the more expensive. Drawings in perspective and in color are given, together with full Plans, Specifications, Sheets of Details, Estimates, etc.

The elegance and cheapness of this magnificent work have won for it the **Largest Circulation** of any Architectural publication in the world. Sold by all newsdealers. $2.50 a year. Remit to

MUNN & CO., Publishers, 361 Broadway, New York.

PRINTING INKS

The SCIENTIFIC AMERICAN is printed with CHAS. ENEU JOHNSON & CO.'S INK, Tenth and Lombard Sts., Philadelphia, and 47 Rose St., opp. Duane, New York

© 1891 SCIENTIFIC AMERICAN, INC.